



MANUAL PART NUMBER: 400-0091-001  
PRODUCT REVISION: 1

## TNP100

### Tilt 'N Plug™ Interconnect Box

### USER'S GUIDE

**ALTINEX**

SIGNAL  
MANAGEMENT  
SOLUTIONS

## INTRODUCTION

Your purchase of the **TNP100 Tilt ‘N Plug™** Interconnect Box is greatly appreciated. We are sure you will find it reliable and simple to use.

Superior performance for the right price, backed by solid technical and customer support is what Altinex has to offer.

The product you are holding in your hands is designed using state-of-the-art technology and is superior to anything available on the market. You will find this and our other products reliable, long lasting, and simple to operate.

We are committed to providing our customers with signal management solutions to the most demanding audio-visual installations at very competitive pricing.

We appreciate your selection of our products and are confident that you will join the ranks of our many satisfied customers throughout the world.

### **This manual covers:**

**TNP100 – Tilt ‘N Plug™** Interconnect Box.

## TABLE OF CONTENTS

	<b>Page</b>
PRECAUTIONS / SAFETY WARNINGS .....	2
GENERAL .....	2
INSTALLATION.....	2
CLEANING.....	2
FCC / CE NOTICE .....	2
ABOUT YOUR <b>TNP100</b> .....	3
TECHNICAL SPECIFICATIONS.....	3
<b>TNP100</b> DIMENSIONS.....	4
DIAGRAMS 1A-1D .....	4
DESCRIPTION DIAGRAM.....	5
DIAGRAM 2.....	5
APPLICATION DIAGRAM .....	6
DIAGRAM 3.....	6
DIAGRAM 4.....	7
DIAGRAM 5.....	8
INSTALLATION .....	9
OPERATION .....	10
CABLES AND ACCESSORIES .....	10
TROUBLESHOOTING GUIDE .....	11
ALTINEX POLICY .....	11
LIMITED WARRANTY.....	11
RETURN POLICY .....	11
CONTACT INFORMATION.....	11

## PRECAUTIONS / SAFETY WARNINGS 1

Please read this manual carefully before using your **TNP100** Interconnect Box. Keep this manual handy for future reference. These safety instructions are to ensure the long life of your **TNP100** and to prevent fire and shock hazard. Please read them carefully and heed all warnings.

### 1.1 GENERAL

- Unauthorized personnel shall not open the unit since there are high-voltage components inside.
- Qualified Altinex service personnel, or their authorized representatives must perform all service.

### 1.2 INSTALLATION

- For best results, place the **TNP100** Interconnect Box in a dry area away from dust and moisture.
- To prevent fire or shock, do not expose this unit to rain or moisture. Do not place the **TNP100** Interconnect Box in direct sunlight, near heaters or heat radiating appliances, or near any liquid. Exposure to direct sunlight, smoke, or steam can harm internal components.
- Handle the **TNP100** Interconnect Box carefully. Dropping or jarring can damage internal components.
- Never place fingers inside the opening on each side of the unit. This action could cause serious injury because of the sharp edges inside of the **TNP100**.
- Do not place heavy objects on top of the **TNP100**. Do not use excessive force to push down on the top of the unit.
- To turn off the main power, disconnect the power cord, which powers the power socket on the **TNP100** pop up panel only. The power outlet socket should be installed as near to the equipment as possible, and should be easily accessible.

- We recommend using wall outlets with a Ground Fault Circuit Interrupter (GFCI) for maximum protection.
- Install all cables according to the instructions. Do not force or pull out any cable or power cord that is attached to the **TNP100** Interconnect Box.

### 1.3 CLEANING

- Surfaces should be cleaned with a dry cloth. Never use strong detergents or solvents, such as alcohol or thinner. Do not use a wet cloth or water to clean the unit.

### 1.4 FCC / CE NOTICE

- This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.
- This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.
- Any changes or modifications to the unit not expressly approved by Altinex, Inc. could void the user's authority to operate the equipment.

## ABOUT YOUR TNP100 2

The **TNP100** is designed for installation into a conference room table. The **Tilt 'N Plug™** Interconnect Box (**TNP100**) provides a means of connecting audio, video, control, and computer video sources into a presentation system. It is ideal for use together with Altinex computer video interfaces. The **Tilt 'N Plug™** Interconnect Box can either pop up and "tilt" to a raised position to provide access to the connectors or it can be lowered into a table when not in use. A pneumatic shock inside the **TNP100's** tower type construction applies pressure to the panel mechanism, making it easy to raise and secure the unit firmly in an open position.

The **Tilt 'N Plug™** Interconnect Box provides easy access to system inputs when they are needed. It also removes system inputs when not needed, eliminating the obstruction. The **Tilt 'N Plug™** Interconnect Box has one input plate on the front panel of the unit. The standard plate offers Computer Video (15-pin HD); Composite Video (RCA), Audio (RCA), Computer Audio (Stereo Mini), Modem (RJ-11), 9-pin D-type RS-232 and Network (RJ-45) input connections. All signals are passed through to a set of female connectors or cables. Several optional connectors can be substituted for the standard set of connectors.

The **Tilt 'N Plug™** Interconnect Box is designed for use with tables ranging from one to three inches thick. It offers an optional mounting bezel to secure the unit flush with the table's surface. The **Tilt 'N Plug™** comes in a standard matte black color. The top of the unit can be finished to match the table or it can be painted another color. This is available on a custom per order basis at an additional charge.

## TECHNICAL SPECIFICATIONS 3

FEATURES/DESCRIPTION	TNP100
<b>Front Panel Standard Configuration Connectors</b>	
Power	1 U.S. outlet with 10 A fuse
Computer Video	1 15-pin HD-F
Composite Video	1 Yellow RCA F
Audio, left, right	1 Black, 1 Red RCA F
Audio	1 3.5 mm stereo F
Telephone	1-RJ-11 F (6-position)
Network	1 RJ-45 F (8-position)
Control	1 DB-9 F
<b>Power</b>	
Power Rating (pass through connector)	90-140 VAC, 10A Max
<b>Mechanical</b>	
Width	6.03in
Height (closed)	4.79in
Finish	Flat Black
Height (opened)	8.05in
Depth	3.260
<b>Operation</b>	
T° Operating	10°C-35°C
T° Maximum	50°C
Humidity	90% non-condensing

## TNP100 DIMENSIONS 4

Diagrams: 1A, 1B, 1C, & 1D

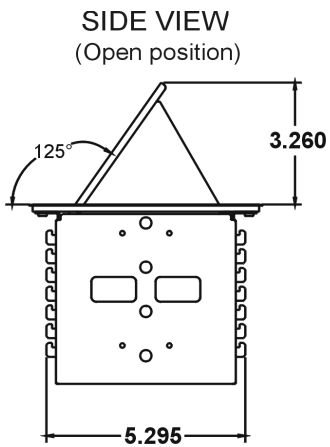


Diagram 1A

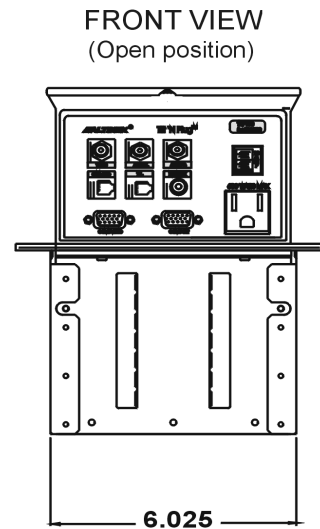


Diagram 1B

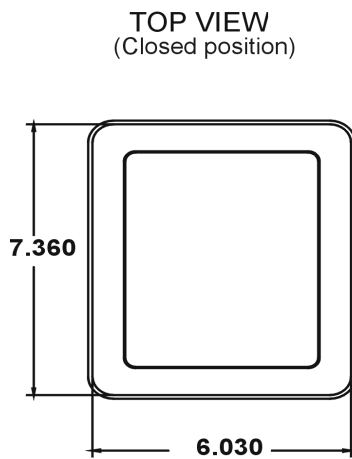


Diagram 1C


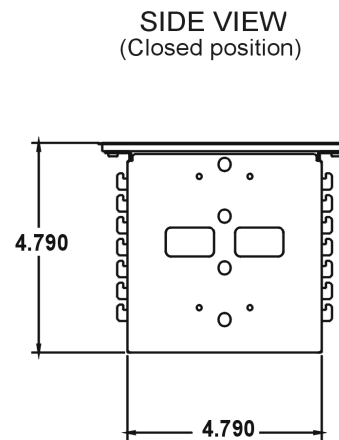


Diagram 1D

Note: Diagrams 1A - 1D are shown without cables.

## DESCRIPTION DIAGRAM 5


Diagram 2: Label of Product

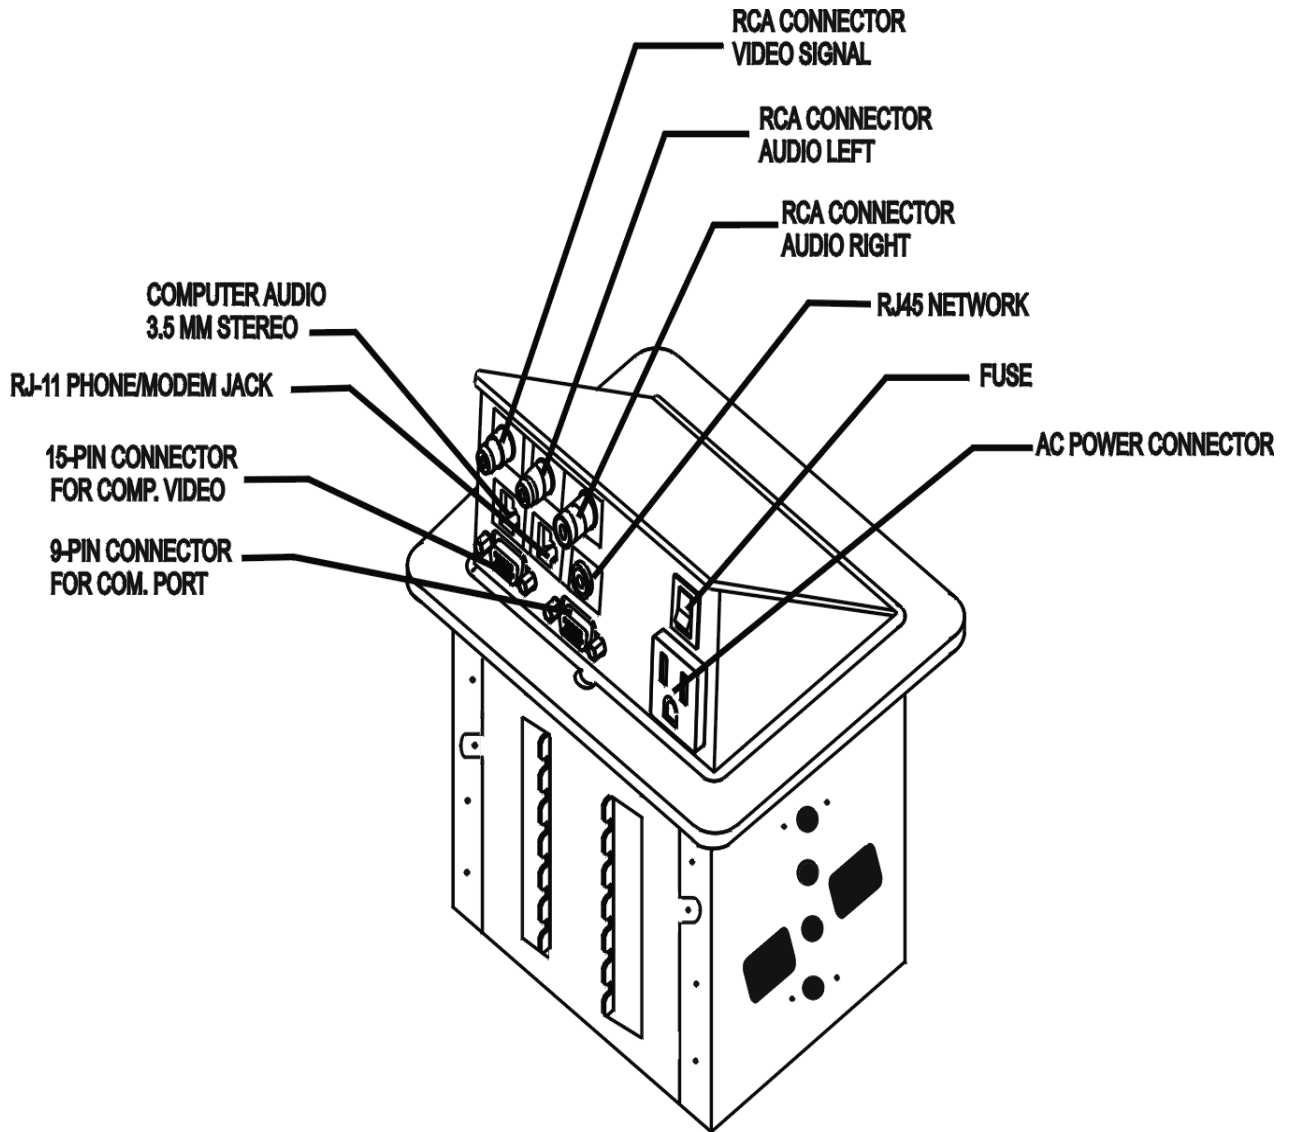

Note: Shown without cables

## APPLICATION DIAGRAM 6

Diagram 3: Application

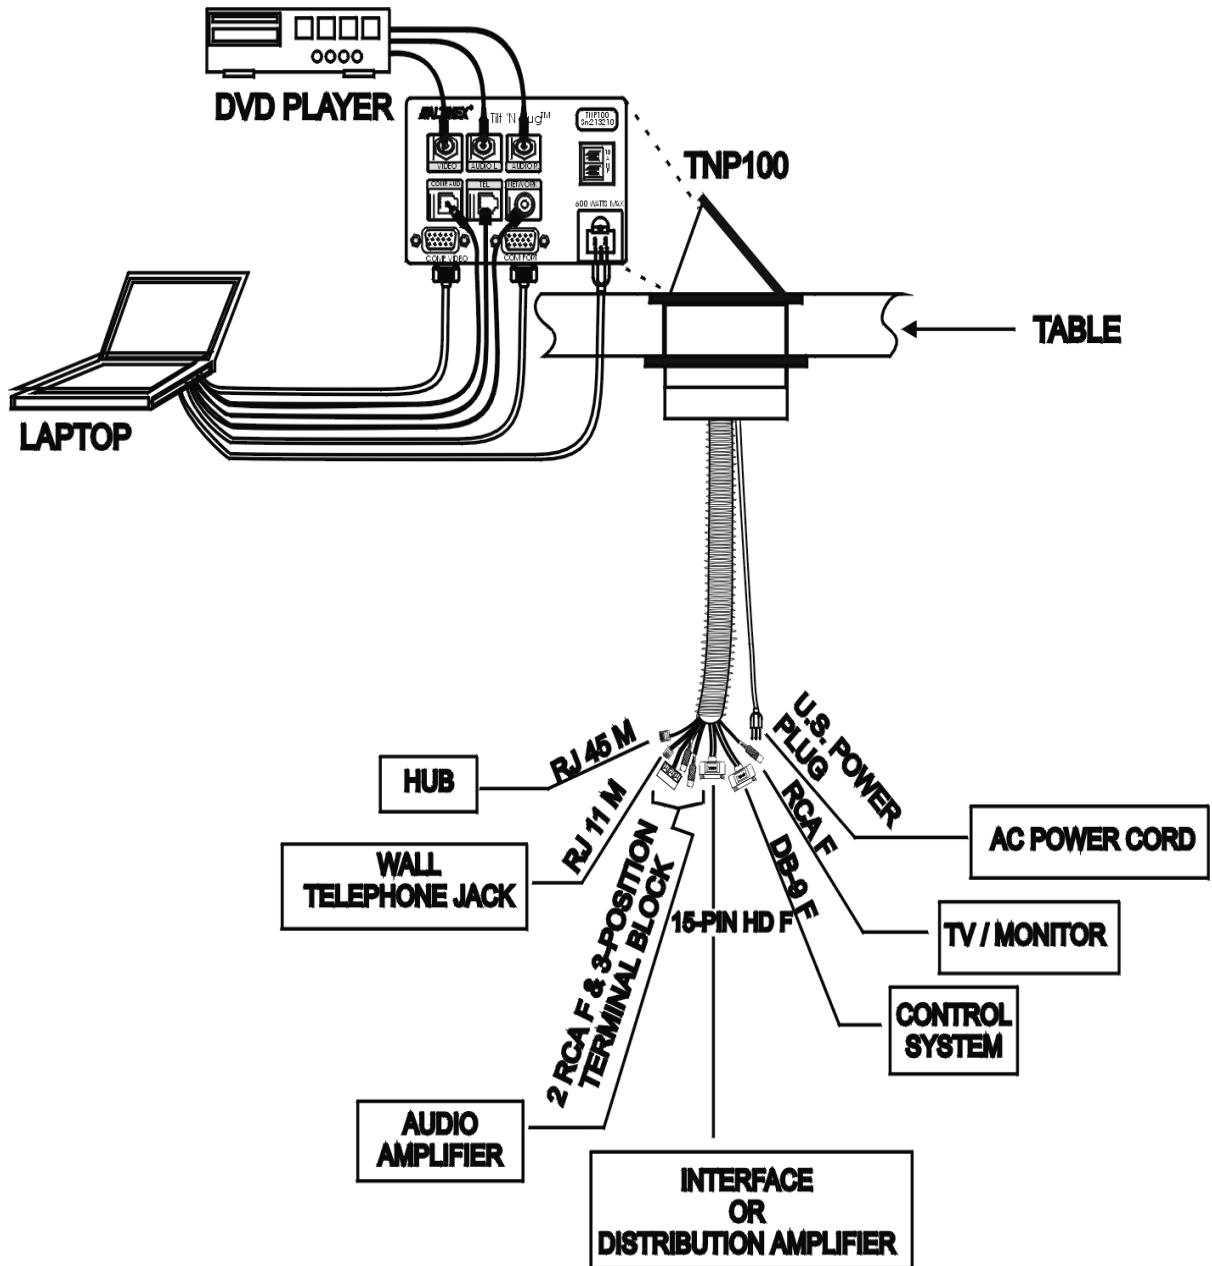

Note: shown with cables

Diagram 4: Final Installation



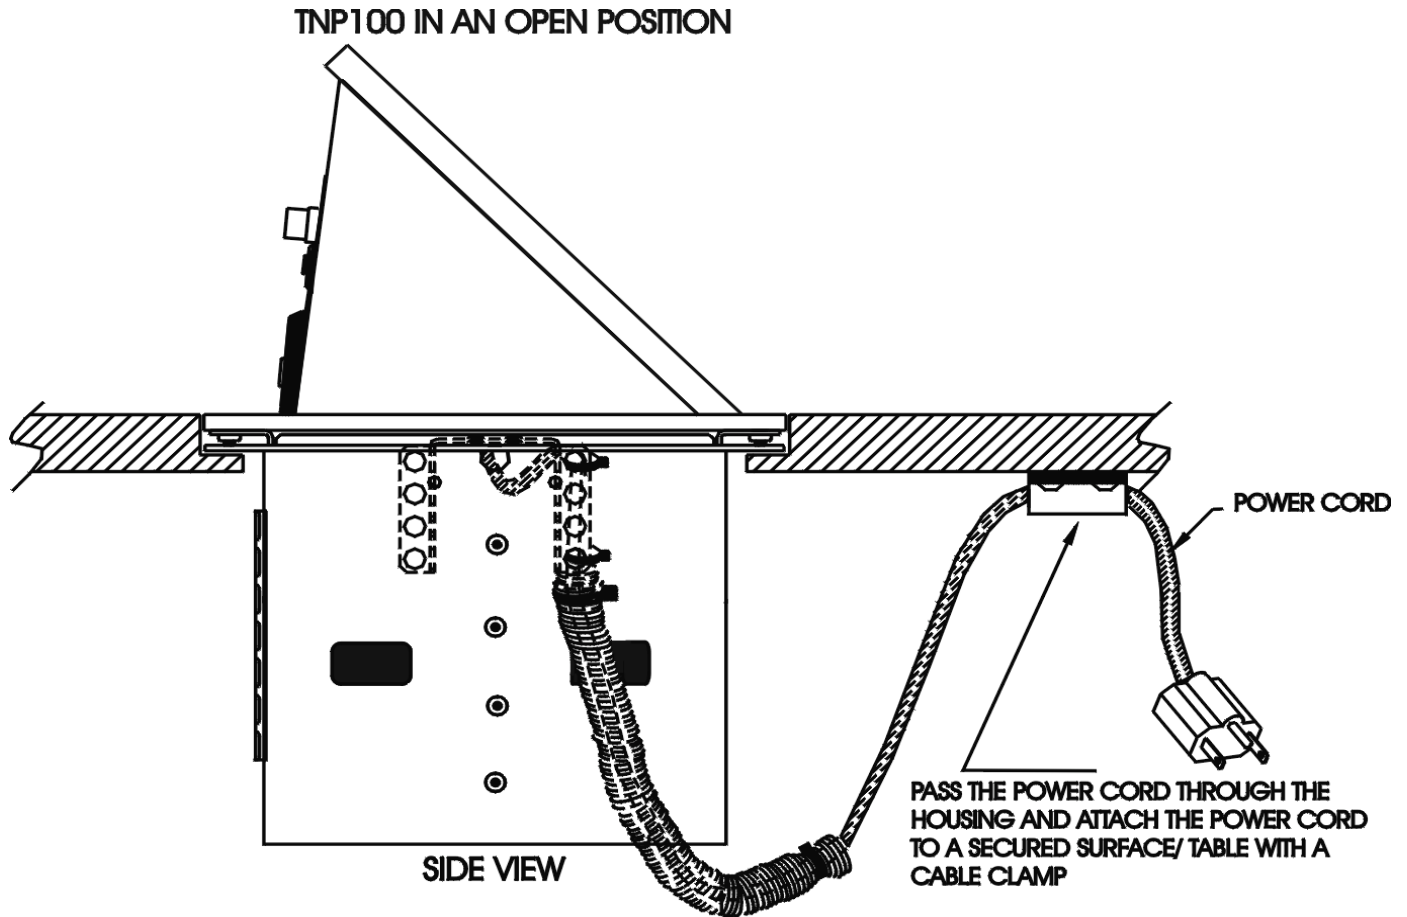




Diagram 5: Table Cutout Requirements

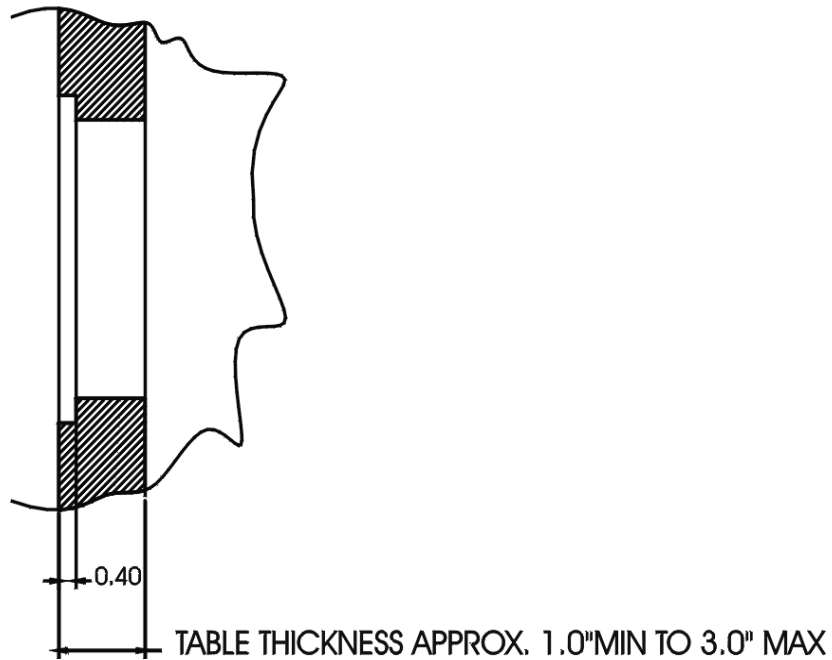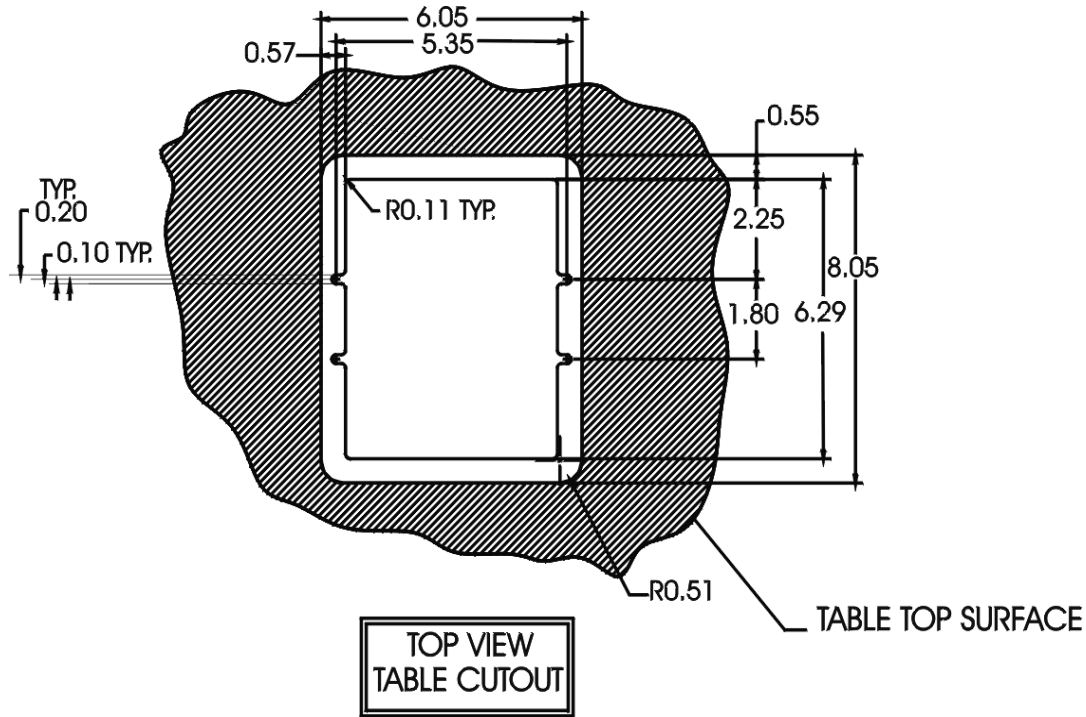

## INSTALLATION


6

**Step 1.** Cut an opening into the table's surface . Refer to diagram 5 on page 8 of the manual for table cutout requirements .

Note: The table can be 3 inches or thinner in thickness. Always confirm dimensions before cutting to insure that specifications have not changed.

**Step 2.** Insert the **TNP100** into the opening in the table.

**Step 3.** Place the table mount support brackets underneath the table and attach them to the **TNP100**. Adjust the brackets to the desired height and secure them to the **TNP100** using a 6-32 nut. There are two table mount support brackets (See Figure 1).



**Figure 1: Table Mount Supports**

**Step 4.** Secure the cables by using the provided cable clamp (See Figure 2). Pass the power cord from the bottom of the housing and attach it to the table using the cable clamp supplied with the **TNP100** unit. Do not keep the cord too tight or too loose (See Diagram 4, page 7).



**Figure 2: Cable Clamp**

**Step 5.** Connect the appropriate cables with the correct input connectors. There are two RCA audio connectors on the front panel

of the **TNP100**. The black connector is known as audio left, whereas the red connector is called audio right. There is also an RCA video connector, which is yellow in color. The network connection is red. In addition, the telephone or data connection is gray.

**Step 6.** Once you have applied power and connected the proper cables on the bottom of the unit, you may raise the unit. To raise the **TNP100** into position, lift the top by pulling upward at the notch in the top plate.

**Step 7.** To lower the unit, push on the top of the **TNP100** until it fits into place.

**CONGRATULATIONS! YOU ARE DONE.  
ENJOY YOUR Tilt 'N Plug™ Interconnect Box.**

**If you experience any problems, please call  
1-800-258-4623 or 1-714-990-2300 for  
international calls**

## OPERATION 7

There are no adjustments necessary to operate the **TNP100**, the unit will operate successfully as long as cables are attached properly and other technical specifications are followed.

## CABLES AND ACCESSORIES 8

Model No.	Description
	<b>VGA MALE TO MALE (HD-15) HIGH RESOLUTION CABLE</b>
<b>CB37xxMR</b>	xx = available length of 3ft, 6ft, 15ft, 25ft, 50ft, 75ft, 100ft, 150ft
	<b>VGA MALE TO FEMALE (HD-15) HIGH RESOLUTION CABLE</b>
<b>CB39xxMR</b>	xx = available length of 3ft, 6ft, 15ft, 25ft, 50ft, 75ft, 100ft, 150ft, 200ft, 250ft
	<b>SUPER HIGH RESOLUTION PLENUM-FLEX MULTI-CHANNEL COAX CABLE VGA MALE TO VGA MALE (HD-15)</b>
<b>CB5000PL-5VMxxxVM</b>	xxx = available length of 3ft, 6ft, 15ft, 25ft, 50ft, 75ft, 100ft, 150ft, 200ft, 250ft
	<b>SUPER HIGH RESOLUTION PLENUM-FLEX MULTI-CHANNEL COAX CABLE VGA MALE TO VGA FEMALE (HD-15)</b>
<b>CB5000PL-5VMxxxVF</b>	xxx = available length of 3ft, 6ft, 15ft, 25ft, 50ft, 75ft, 100ft, 150ft, 200ft, 250ft
	<b>SUPER HIGH RESOLUTION PLENUM-FLEX MULTI-CHANNEL COAX CABLE VGA MALE TO VGA FEMALE (HD-15)</b>
<b>CB5100PL-5VMxxxVM</b>	xxx = available length of 3ft, 6ft, 15ft, 25ft, 50ft, 75ft, 100ft, 150ft, 200ft, 250ft

	<b>SUPER HIGH RESOLUTION PLENUM-FLEX MULTI-CHANNEL COAX CABLE VGA MALE TO VGA FEMALE (HD-15)</b>
<b>CB5100PL-5VMxxxVF</b>	xxx = available length of 3ft, 6ft, 15ft, 25ft, 50ft, 75ft, 100ft, 150ft, 200ft, 250ft
	<b>OPTIONAL CONNECTORS</b>
	Blank Connector (Snap-in and 15-pin location)
	BNC Female
	4-pin Mini-DIN
	6-pin Mini-DIN

## TROUBLESHOOTING GUIDE 9

The **TNP100** supplied unit was carefully tested and no problems were detected; however, we would like to offer the following suggestions:

- Please make sure that the Fuse is of a 10 Amps rating.
- Please make sure that the highest quality video, audio, network, and telephone cables or connectors are used.
- Make sure that no cable or power cord is damaged or pinched. If there has been damage, then do not use the **TNP100** unit. Immediately contact the Altinex Customer Service Department to have the unit repaired.

## ALTINEX POLICY 10

### 10.1 LIMITED WARRANTY

Altinex warrants that its products and cables are free from defects in materials under normal use and service. This warranty is limited to repairing at company's factory any part or parts of the product, which upon company's examination shall disclose to be, thus defective. Products considered defective should be returned to company with transportation charges pre-paid within 2 years (90 days for cables) from date of shipment to the purchaser. The warranty is expressly instead of all other warranties expressed or implied. Altinex neither assumes nor authorizes any other person to assume for it any other liability concerning the sale of the products. This warranty shall not apply to any product that shall have been repaired or altered outside of company's factory in any way so as, in its judgment, to affect its stability or reliability, or that has been subject to misuse, negligence, or accident.

### 10.2 RETURN POLICY

It is very important to Altinex that you receive all products that you have ordered and that this product meets your expectations. In the unlikely

event that an Altinex product needs to be returned, please follow the policies below:

Altinex will accept all product returns for a period of 30 days from authorized Altinex dealers in an unopened package.

If a product has been opened, the restocking fees will apply. For the restocking fee, please contact an Altinex Sales Representative.

If the product is in your possession for more than 30 days, the restocking fees will apply.

Altinex will not accept any returns on cables or custom products.

If your product is in warranty and needs service, contact the Altinex Sales Department for an RMA (Return Material Authorization). Products returned without an RMA number may experience a delay in service.

If your product is out of warranty and needs service, contact the Altinex Sales Department for an RMA (Return Material Authorization). Products returned without an RMA number may experience a delay in service. The service charges will be quoted to you before the actual repairs are done.

### 10.3 CONTACT INFORMATION

#### Sales Department

Phone: 714-990-2300

Fax: 714-990-3303

#### Accounting Department

Phone: 714-990-6088

Fax: 714-990-5778