

The ST-200 Base Transmitter features 16 user selectable frequencies controlled by a front mounted selector switch, a headphone jack with adjustable level for input signal monitoring, and a peak reading LED display for visual input monitoring. On the back of the unit is a balanced XLR-3F with

selectable mic, line, and 70 volt input options, as well as an unbalanced 1/4" input. An input attenuator and hi/low RF power switch are additional back panel features.

ST 200




FRONT

BACK

SoundMate™

Telex SoundMate™ personal listening systems help overcome background noise and poor building acoustics that can make listening difficult for the hearing impaired listener. A Telex base station, portable belt pack transmitter, your choice of receivers, and a wide assortment of accessories allow you to meet the needs of individuals who require hearing assistance. These listening systems are even compatible with a variety of hearing instrument styles for hearing aid users. Let Telex, the acknowledged leader in personal assistive listening products, help you select the system that's right for any listening environment.

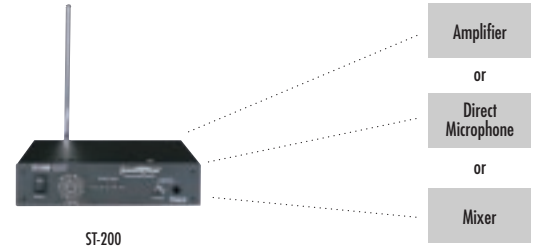

AUDIO SOURCE

System versatility – A sound system amplifier, mixer or wired microphone can plug directly into the ST-200 base station transmitter. The ST-200 then sends the audio signal to an unlimited number of personal receivers.

PST 16

The PST-16 Belt Pack Transmitter may be set to any one of 16 channels, and operates on frequencies in the 72-76 MHz band. It is lightweight, battery operated and includes a small electret lapel microphone for convenient portable use. The PST-16 has two audio input jacks. The Auxiliary input is designed to allow audio devices such as teacher's aids or tape players. The second jack is normally used for microphones and is located on the top panel.



FRONT

TOP

SIDE



The SR-100 16 Channel Receiver is the perfect solution to multiple transmitter hearing assistance systems. The SR-100 features an advanced digital PLL synthesizer to tune all 16 narrow-band frequencies offered in the 72-76 MHz band. The receiver also includes a special high frequency contour filter and boost switch to increase the intelligibility of the audio signal. Additional features include a battery saving automatic power shutoff when the earphone is unplugged.

SR 100

The SR-50 provides clear reception and the simplicity of a fixed channel. This economical receiver operates on one of 16 fixed narrow-band frequencies in the 72 -76 MHz band. Ergonomic raised volume control knob make level adjustments easily accessible by feel. Recessed headphone jack provides extra protection for earphone connections. Two AA batteries give up to 30 hours continuous battery life.



SR 50



SM-1 SYSTEM
 Includes one ST-200 base transmitter, 4) SR-50 receivers, 4) SEB-1 earbuds, and a SoundMate wall plaque (SM-C case sold separately)

BATTERY CHARGER
 Model BC-100 charges two SR-50's, SR-100's, PST-16's or any combination of transmitters and receivers.



ACCESSORIES

- A** NL-4S Neckloop Assembly
(for use with hearing aids equipped with telecoils)
- B** HED-2 Collapsible Lightweight Headphone
- C** HED-3 Full Cushion Noise Reduction Headphones
- D** AFC-1 Under Chin Eartube
(for use with CMT-98 and Telethin Earphone Driver)
- E** • CMT-98 5' Cord
• EH-S/EH-L Earshell Holder for Telethin Drivers
• RTV-04/RTW-04/RTR-04 Telethin Earphone Driver
- F** DEB-2 Dual Earbud *with cord*
- G** SEB-1 Single Earbud *with cord*
- H** CCS-12 Replacement Cushion Covers
(Package of 12, for SEB-1, DEB-2 and HED-1 earbuds)
- I** HED-1 Ultra Lightweight Headphone
- J** SCHS-745 Headworn Mic
- K** PH-21 Noise Canceling Headworn Mic
- L** WLM-50 Mic *(Supplied with PST-16)*
- M** HGA-1 1/2 Wave Dipole Gain Antenna



NOT SHOWN:
RM-S Single Rack Kit
RM-D Double Rack Kit

SPECIFICATIONS:

There are 16 standard frequency options for the following products: 72.1, 72.2, 72.3, 72.4, 72.5, 72.7, 72.8, 72.9, 74.7, 75.3, 75.4, 75.5, 75.6, 75.7, 75.8, 75.9 MHz

ST-200 16-Channel Transmitter (Catalog No. 71218-000)

| | |
|-----------------------------|--|
| RF Frequency Range..... | 72 to 76 MHz |
| Modulation: FM | ±25 KHz deviation |
| Signal-To-Noise Ratio | 58 dB (64 dB A weighted) |
| Maximum Deviation | ±25 KHz |
| Maximum Rated Power | 50 mW |
| Audio Input | Balanced XLR-3F plus unbalanced 1/4" |
| Antenna | 1/4 wave omnidirectional whip |
| Audio Controls | Audio Input level, monitor jack volume |
| Power Requirements..... | 15-24 Vdc or 13 Vac; 115 Vac 60 Hz @ 300 mA plug-in wallpack power supply |
| Dimensions | H 1 3/4" (4.5 cm) x W 7 1/2" (19.2 cm) x D 6 7/8" (17.5 cm) |
| FCC ID | B5DM508 |
| Visual Indicators | 5 segment audio level LED, power ON indicator |
| RF Power Switch | 80K µV/m @ 3 m in hi 25K µV/m @ 3 m in low |

PST-16 16-Channel Transmitter (Catalog No. 71255-000)

| | |
|------------------------------------|--|
| Audio Input Characteristics | Mic TA4M connector, 7.75 mV RMS input for ±25 KHz deviation. Impedance, 10K Ohms, nominal. Aux. Input, Female 1/8 in. 100 mV Unbalanced, 10K Ohms, nominal |
| Antenna..... | Permanently attached trailing wire |
| Modulation: FM | ±25 KHz deviation |
| Frequency Response (System) | 100 Hz to 10,000 Hz |
| Automatic Gain Control Range | 30 dB |
| System Signal-To-Noise..... | 58 dB |
| Preemphasis..... | 100 µ seconds |
| Maximum Power | 80K µV/m @ 3 m |
| Power Requirements..... | (2) AA batteries, Alkaline or NICAD 8 hours Alkaline, 4 hours NICAD |
| FCC ID | B5DM509 |

In accordance with Federal Communications Commission (FCC) rules and regulations, Telex SoundMate personal listening systems are intended only for use in providing auditory assistance to the handicapped and are not intended for use by the general public.

SR-100 16-Channel Receiver (Catalog No. 71156-000)

| | |
|-------------------------------------|---|
| Power Requirements..... | (2) AA batteries, Alkaline or NICAD 30 hours Alkaline, 10 hours NICAD |
| Audio Frequency Response | <3 dB Variation (100 Hz -10 KHz) |
| Modulation: FM | ±25 KHz deviation |
| Sensitivity | 0.5 µV typical, 1.0 µV maximum, 12 dB SINAD |
| Image Rejection | >65 dB |
| Signal-To-Noise Ratio | >65 dB |
| Distortion | <2% T.H.D. |
| Audio Output @ 10% distortion | into 8 Ohms: 2.0V / 15 mW 3.0V / 80 mW into 32 Ohms: 2.0V / 10 mW 3.0V / 50 mW |
| Antenna Type | 1/4 wave omnidirectional, in earphone cord |
| Audio Controls | Volume, On/Off, High frequency boost control |
| Earphone Connector Type | 3.5 mini stereo or mono |
| Dimensions | H 4" (101 mm) x W 2 3/4" (70 mm) x D 1" (25 mm) |
| Visual Indicators | Backlit On/Tuning indicator |
| External Jack | Audio Output/Charger |
| FCC ID | B5DE405 |

SR-50 Receiver (Catalog No. 71155-XXX*)

| | |
|-------------------------------------|---|
| Power Requirements..... | (2) AA batteries, Alkaline or NICAD 30 hours Alkaline, 10 hours NICAD |
| Sensitivity | 0.5 µV typical, 1.0 µV maximum, 12 dB SINAD |
| Audio Frequency Response | <3 dB Variation (100 Hz -10 KHz) |
| Signal-To-Noise @ 1 mV Input | >60 dB |
| Distortion | <2% T.H.D. |
| Audio Output @ 10% distortion | into 8 Ohms: 2.0V / 15 mW 3.0V / 80 mW into 32 Ohms: 2.0V / 10 mW 3.0V / 50 mW |
| Controls | Volume/On/Off Switch |
| External Jack | Audio Output/Charger |
| Dimensions | H 4" (101 mm) x W 2 3/4" (70 mm) x D 1" (25 mm) |
| FCC ID | B5DE401 |

Telex®

TELEX COMMUNICATIONS, INC. • 9600 Aldrich Avenue South, Minneapolis, MN 55420 • Tel: 612-887-5550, Fax: 612-884-0043 • E-mail: pro.sound@telex.com • Web page: www.telex.com