
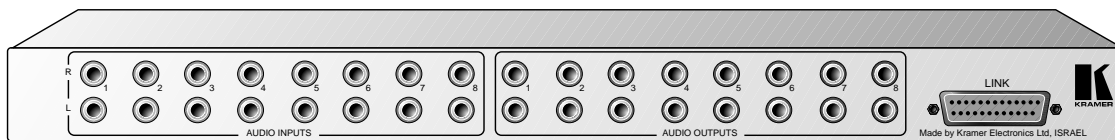


The KRAMER **BC-2288** is an *8x8 Audio Matrix Switcher* intended for studio applications. The **BC-2288** works only in conjunction with the KRAMER **BC-2088** Video Matrix. The **BC-2288** is controlled and programmed via the **BC-2088**, and can operate in either *lock* (Audio-follow-Video) or *Breakaway* mode.

Some features and applications:

- ❖ Live video production studios.
- ❖ Audio production studios.
- ❖ Video / Audio duplication studios.
- ❖ Shops, points of sale, postproduction and educational institutions.

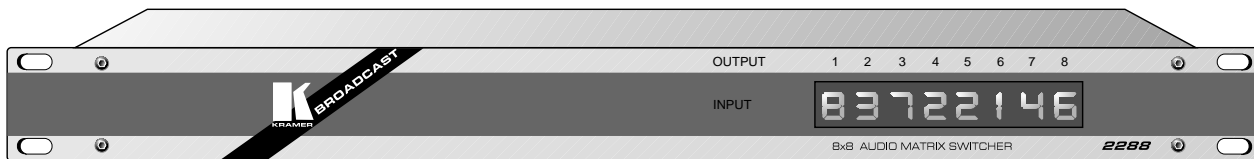

Technical Specifications:

INPUTS:	8 Stereo Audio, 1Vpp/33kΩ on RCAs.
OUTPUTS:	8 Stereo Audio, 1Vpp/100Ω on RCAs. DB 25 connector (link to BC-2088).
AUDIO BANDWIDTH:	15-35000 Hz. -3dB.
CROSSTALK:	Less than 55dB.
AUDIO S/N:	Better than 88 dB.
SWITCHING:	During Vertical Interval (via BC-2088).
CONTROL:	Microprocessor and EEPROM (via BC-2088.)
DIMENSIONS:	19 inch, 1 U, rack mountable.
POWER SOURCE:	Via BC-2088, 1 Watt.