



VGA-Type Line Driver/GLI

Product Comparison

Inputs/Outputs	MT103-114
Input Connectors	2-in 2-out + equalization
Output Connectors	15-pin HD female
Output Connectors	15-pin HD female
Bandwidth	350 MHz
Slots	1

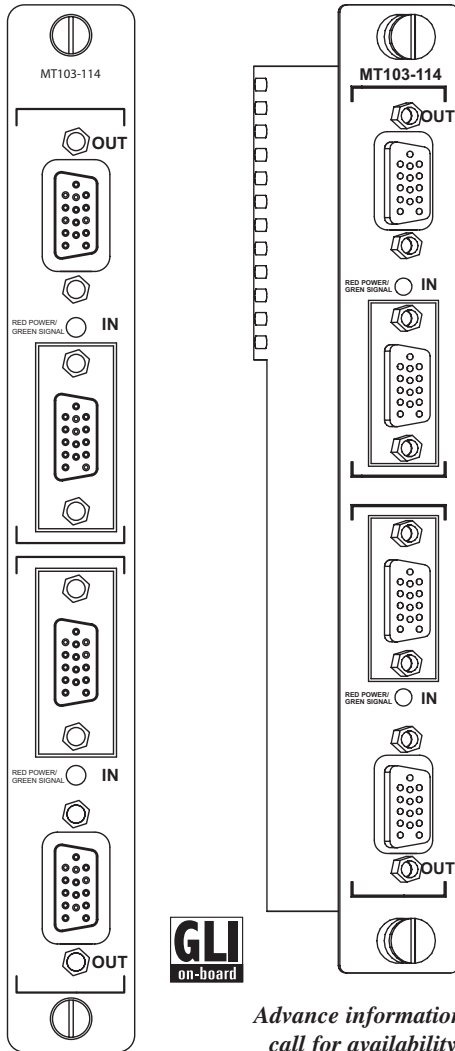

*Advance information;
call for availability*

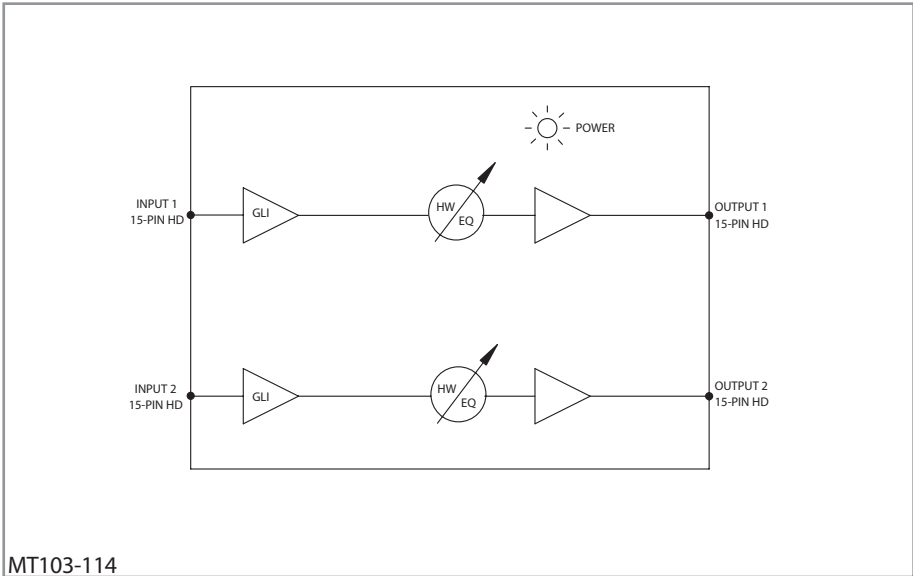

Design Tips

- Use to prevent and remove “hum bars” in computer video image
- Equalization compensates for cable attenuation over 25–300 ft. (7.6–91m) cable runs
- Compatible with VGA through QXGA signals
- Also supports RGBHV, RGBS, and RGSB format signals (with proper cable adapter)
- To convert 15-pin HD to BNCs use **MS8102CA** (six foot/1.8 meter, 15-pin HD male to five-BNC male) or **MS8106CA** (six foot/1.8 meter, 15-pin HD male to five-BNC female)

