

10BX

10-Inch Extended-Range Bass Guitar Speaker

- Modern bass-guitar performance—extended high-frequency response
- Very solid, tight low-frequency response
- Ideal upgrade speaker
- 150 watts long-term power capacity
- Edge-wound flat aluminum wire for maximum output and “bullet proof” reliability
- 98.5-dB sensitivity

SPECIFICATIONS

Usable Frequency Response in a Typical Vented 1.2-Cubic-Foot Enclosure

(1 watt/1 meter; see Figure 1):
36-8,000 Hz

Sound Pressure Level (1 watt/1 meter):
98.5 dB

Long-Term Average Power Handling Capacity (per EIA RS-426-A 1980; see Power Handling section):

150 watts

Nominal Impedance:
8 ohms

Voice-Coil Diameter:
63.5 mm (2.5 in.)

Thiele-Small Driver Parameters

f_s (free-air resonance frequency):
63 Hz

Q_{ES} (electromagnetic Q at f_s):
0.342

Q_{MS} (mechanical Q at f_s):
6.5

Q_{TS} (total Q at f_s): $\frac{(Q_{ES} Q_{MS})}{(Q_{ES} + Q_{MS})}$:
0.325

V_{AS} (volume of air having same acoustic compliance as driver suspension):
42.5 liters (1.5 ft³)

η_0 (half-space reference efficiency):
3.0%

V_D (peak displacement volume of diaphragm: $S_D \times X_{max}$):
0.113 liters (0.004 ft³)

S_D (effective diaphragm area):
0.342 m² (132.6 in.²)

X_{max} (peak linear displacement of diaphragm):
3.3 mm (0.13 in.)

R_s (dc resistance of voice coil):
5.2 ohms $\pm 10\%$

Mounting Information

(see Installation section),

Mounting Hole Diameter

(eight evenly spaced holes):
7.1 mm (0.28 in.)—letter “L” drill

Bolt Circle Diameter:
244 mm (9.62 in.)

Baffle Opening Diameter (front or rear mounting):
229 mm (9.0 in.)

Optional Mounting Accessory:
SMH-1 mounting hardware kit

Dimensions (see Figure 2),

Overall Diameter:
259 mm (10.20 in.)

Overall Depth:
110 mm (4.35 in.)

Net Weight:
5.22 kg (11.5 lb)

Shipping Weight:
6.4 kg (14 lb)

DESCRIPTION

The Electro-Voice 10BX is a premium 10-inch speaker designed for bass guitar. This speaker is ideal for the bass guitarist who needs to hear all of the tones and nuances that his four-string bass is capable of producing, at high stage levels. The 10BX is suitable for full-range reproduction of conventional 4-string basses and basses with a “dropped-D” tuning (or low-D extension). Used in multiples, this speaker is capable of thunderous output levels. The 10BX is perfect for the modern bassist who may be incorporating “pop” and “slap” techniques into his/her playing. Power capacity is 150 watts per EIA RS-426-A 1980. The Power-Handling section describes these ratings in detail.

This speaker has been “voiced” specifically for modern bass players. The 8½-lb magnet structure has been newly designed to provide both

high energy and relatively light weight. The overhung voice coil is constructed of a single layer of flat aluminum wire for light weight, low inductance and high efficiency. (Remember, light weight in a speaker’s moving system and high efficiency in the magnet structure generally translate to good high-frequency and transient response.) The most visually obvious difference in these speakers is the cone and dust-dome material. It is a new composite made of paper fibers with mica and epoxy added for remarkable stiffness. The end result is a speaker with a very light-weight moving system and a bright and open sound. Like most professional Electro-Voice speakers, this speaker utilizes an extremely rugged cast aluminum frame to ensure long-term mechanical integrity.

The 10BX may be front- or rear-mounted without an adapter. The optional SMH-1 speaker mounting kit facilitates front mounting (see Installation section).

RECOMMENDED ENCLOSURES

Replacement Use in Existing Enclosures

The 10BX will often be used to replace inferior speakers in existing enclosures. Mechanical and electrical characteristics are such that the superior efficiency, sound quality and reliability of the 10BX will be realized in virtually any sealed or vented (bass reflex) enclosure.

Vented Enclosures

The most extended, lowest distortion and best-controlled bass performance is usually realized in properly designed vented enclosures. In such designs, the vent, or port, actually reproduces the lowest octave or so of bass response. The vent is driven to full acoustic output by a relatively small motion of the speaker cone itself, acting through the air contained within the enclosure. The excursion of the 10BX

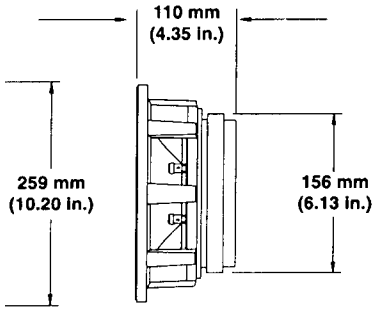


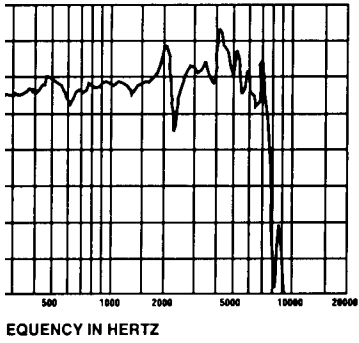


FIGURE 6 — Connection of Two 10BX Speakers in Parallel (net impedance is 4 ohms)


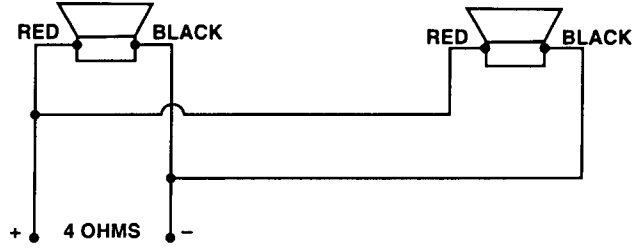


FIGURE 2 —



ing Detail (not to scale)




FIGURE 7 — Connection of Two 10BX Speakers in Series (net impedance is 16 ohms)


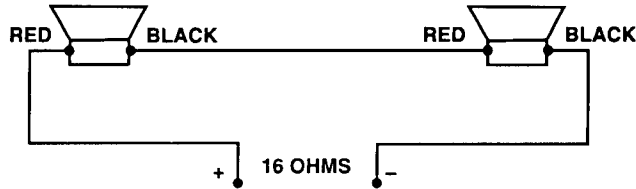


FIGURE 3 —



ing Detail (not to scale)

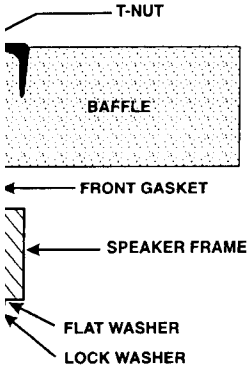


FIGURE 8 — Connection of Four 10BX Speakers in Series/Parallel (net impedance is 8 ohms)


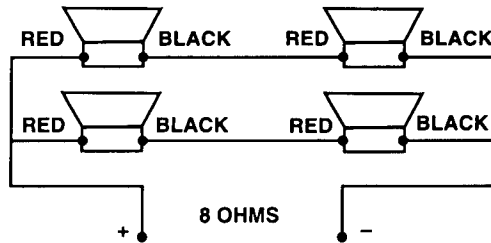


FIGURE 4 —



as a controlled
orce ment sys-
re provides the
nerally, bass-
mproved if the
for roughly the
l through it. For
s, a 44-Hz tun-
"E" on a bass
-Hz, but a 44-Hz
amount of vent
at 41.2 Hz. If a
"D" is used, the
y is 40 Hz. For
recommended
roximately 1.2
er the volume,
quired.

ar-mounted, al-
red because of
mounting, the
cessary is rec-
ng instructions
given below. It
baffle openings
followed.

9-mm (9.0-in.)
1 (9.62-in.) bolt
nd screw loca-
Drill the screw
affle opening.
ur screws are
f the speaker.
simple, secure
e holes should
(letter "L" drill).
-20 long shank
ar of the holes.

aker is accom-
od foam gasket
our new 10BX.
and apply the
surface of the
the holes in the
ng holes in the

ould be 1/2-inch
using T-nuts.
for internal hex
t down in the
gasket (see
htened evenly
ossible with a
be sufficient.

Rear mounting requires the same diameter cutout and screw circle as front mounting. Other comments regarding the use of T-nuts apply to rear mounting as well.

Screw length should be 3/4-inch plus panel thickness if using T-nuts—longer for standard hex nuts. If hex nuts are used, a second nut should be tightened against the first nut to prevent loosening during operation. A lock washer and flat washer are recommended between the screw head and frame (see Figure 4).

Screws should be tightened evenly, but not excessively. Maximum torque possible with a proper size screwdriver should be sufficient. Do not use adhesive-back gasket segments for rear mounting.

Custom Enclosures

If a cabinet is to be constructed from scratch, 3/4-inch solid and jointed or marine plywood is recommended. After construction, be certain interior is completely free of metal filings, wood chips, etc.

Electrical Connections

Use no. 18 or larger stranded wire to connect the two terminals on the loudspeaker to the amplifier output.

FREQUENCY RESPONSE

Frequency response was measured with the 10BX in a 1.2-cubic-foot vented enclosure, tuned to 40 Hz, placed in an anechoic (echoless) environment at 1 meter on axis with a 1-watt swept sine-wave input. The frequency-response curve is shown in Figure 1.

POWER-HANDLING

In musical-instrument systems, unlike sound-reinforcement systems, it is advisable to use speakers that are rated for at least as much power as your amplifier output rating.

To our knowledge, Electro-Voice was the first U.S. manufacturer to develop and publish a power test closely related to real-life conditions. Specifically, the 10BX is designed to withstand the power test described in EIA RS-426-A 1980. The EIA test spectrum is applied for eight hours. This shaped signal is sent to a power amplifier with the continuous power set at 150 watts into the 6 ohm EIA equivalent impedance (30 volts true rms). Amplifier clipping sets instantaneous peaks at 6 dB above the continuous power, or 600 watts peak (60 volts peak). This procedure provides a rigorous test of both thermal and mechanical failure modes.

individual product-line statement(s) below, or in the individual product data sheet or owner's manual, beginning with the date of original purchase. If such malfunction occurs during the specified period, the product will be repaired or replaced (at our option) without charge. The product will be returned to the customer prepaid. Exclusions and Limitations: The Limited Warranty does not apply to: (a) exterior finish or appearance; (b) certain specific items described in the individual product-line statement(s) below, or in the individual product data sheet or owner's manual; (c) malfunction resulting from use or operation of the product other than as specified in the product data sheet or owner's manual; (d) malfunction resulting from misuse or abuse of the product; or (e) malfunction occurring at any time after repairs have been made to the product by anyone other than Electro-Voice or any of its authorized service representatives. **Obtaining Warranty Service:** To obtain warranty service, a customer must deliver the product, prepaid, to Electro-Voice or any of its authorized service representatives together with proof of purchase of the product in the form of a bill of sale or receipted invoice. A list of authorized service representatives is available from Electro-Voice at 600 Cecil Street, Buchanan, MI 49107 (616/695-6831 or 800/234-6831). **Incidental and Consequential Damages Excluded:** Product repair or replacement and return to the customer are the only remedies provided to the customer. Electro-Voice shall not be liable for any incidental or consequential damages including, without limitation, injury to persons or property or loss of use. Some states do not allow the exclusion or limitation of incidental or consequential damages so the above limitation or exclusion may not apply to you. **Other Rights:** This warranty gives you specific legal rights, and you may also have other rights which vary from state to state.

Electro-Voice Speakers and Speaker Systems are guaranteed against malfunction due to defects in materials or workmanship for a period of five (5) years from the date of original purchase. The Limited Warranty does not apply to burned voice coils or malfunctions such as cone and/or coil damage resulting from improperly designed enclosures. Electro-Voice active electronics associated with the speaker systems are guaranteed for three (3) years from the date of original purchase. Additional details are included in the Uniform Limited Warranty statement.

Service and repair address for this product: Electro-Voice, Inc., 600 Cecil Street, Buchanan, Michigan 49107 (616/695-6831 or 800/234-6831).

Specifications subject to change without notice.

Often, in bass response is r
response. Ty
tems are "tune
flattest possi
guitar system
enclosure is
lowest notes t
standard tunir
ing is recomn
guitar actually
tuning will pro
contribution of
four-string bas
recommended
any of the abo
enclosure inte
cubic feet per
the less equal

INSTALLATION

The 10BX ma
though front n
convenience.
convenient. S
ommended. C
for standard fr
is important th
and mounting

Front Mount

Front mountir
diameter cuto
circle. Mark th
tions on the t
holes before c
If 1/4-20 scre
sufficient for s
T-nuts are re
mounting. If T-
be 7.1-mm (0.
Apply glue to
T-nuts before

Sealing of the l
plished with th
segments that
Strip off the p
gasket to the
speaker rim, r
gasket line up
speaker frame

Length of the
plus the pane
The screws mu
drive machine
recess of the
Figure 3). Scr
and securely.
proper size sc