

# Tilt 'N Plug Jr.™ Dual Data

## Key Features

- Dual independent compact enclosures in one unit
- Opens/closes by pressing on top cover
- Pneumatic lift and a mechanical latching mechanism
- Two AC power outlets and two CAT-5 ports per enclosure
- Many optional top cover and bezel finishes available



*Each independent enclosure uses a new design with pneumatically-assisted lift and easy access to the back panel*



*U.S. Patent No. D455,716*

## Available Connectors

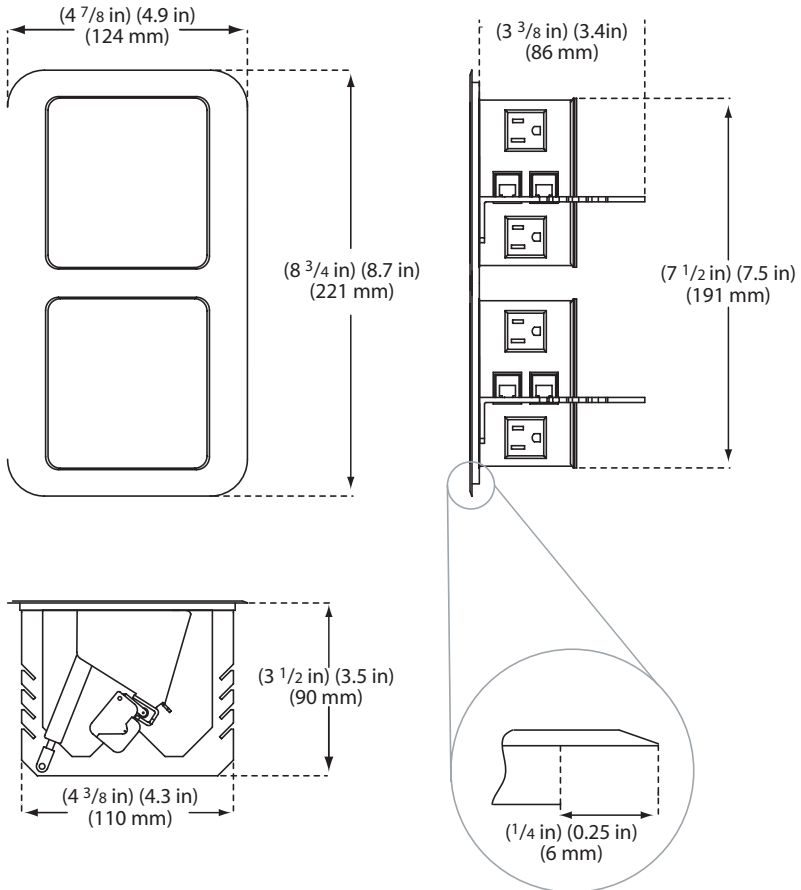

## Connector Ends



*Product subject to change without notice.*

ALTINEX, Inc. • Toll Free: 800-ALTINEX • Tel: 714-990-2300 • Fax: 714-990-3303 • Web: [www.altinex.com](http://www.altinex.com)

## Product Dimensions



Opening force . . . . .5 lbs/2.3 kg  
 Materials: tabletop . . . . .aluminum  
 Std. finish: tabletop . . . . .black anodized  
 Temp. range . . . . .10° to 40° C

Closing force . . . . .4 lb/1.8.kg  
 Materials: body . . . . .steel  
 Std. finish: body . . . . .black zinc  
 Warranty . . . . .3 yrs; gas spring: 1 yr

## Design Tips

- Either tower unit may be reversed at the factory
- CAT-5 connector assemblies may be factory customized for specific applications
- U.S. AC power connector may be replaced with IEC320 female for international applications
- Great for colleges, universities, and learning centers