

# Ditto-Amp™ I-in 2-out VGA Dist. Amplifier

# DAI907SX



## KEY FEATURES

- Two Buffered Outputs
- Ideal for use with LCD/DLP Projectors
- Comes with 3-foot Male to Male VGA Input Cable
- Ultra Compact Design
- Solid Metal Enclosure
- External Power Supply (9V 500mA)

## Ditto-Amp™

## DESCRIPTION

The Ditto-Amp™, part # DAI907SX, is a high resolution 1-in 2-out VGA (VGA thru UXGA) distribution amplifier designed to simultaneously feed a local monitor and a distant monitor or projector.

The Ditto-Amp is ideal for use with LCD/DLP projectors and other displays that utilize a 15-pin HD (VGA-type) input connector. The local monitor output is aligned for optimal performance up to approximately 12 feet, while the main output is aligned for optimal performance at 75 feet, with the capability of driving as far as 250 feet depending on the signal resolution and cable quality.


The LED indicator on the face of the unit performs a dual function: it turns red when the unit is receiving

power and it turns green when the input senses an active signal. This makes it easy to troubleshoot the unit, especially in applications using laptop computers (where it is not always clear if you are receiving an active signal from the source.)

The Ditto-Amp is packaged with a 3-foot Male to Male VGA cable (part # CB3703MR) for connection to the output of a computer. Longer cables are also available.

The Ditto-Amp offers a compact solid metal enclosure that can be mounted using optional hardware. The Ditto-Amp also has step-by-step user's instructions on the face of the unit to allow for an easy installation.

## APPLICATION DIAGRAM

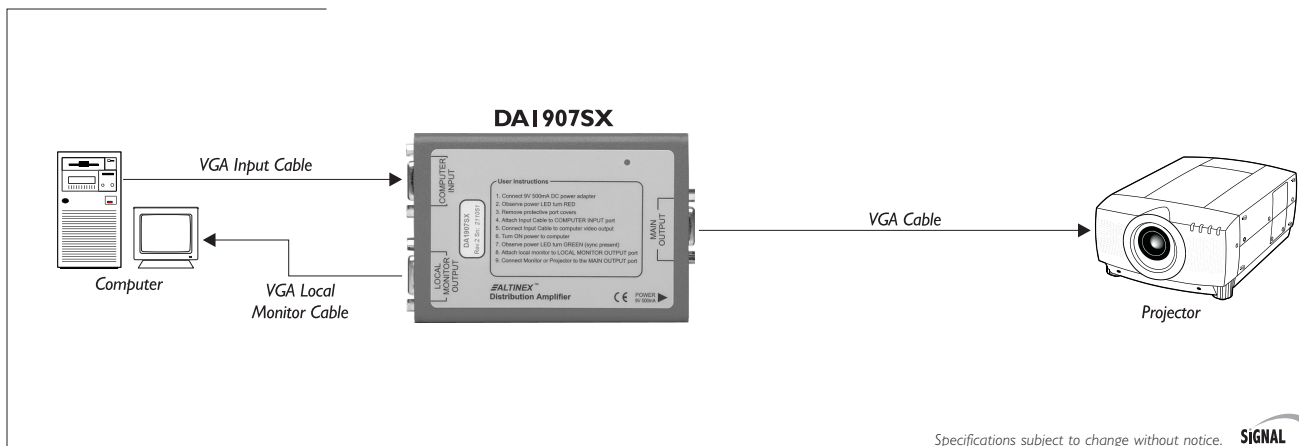

Specifications subject to change without notice.

