



**Electro-Voice**  
a MARK IV company

**Commercial  
Microphones**

# 1700MF FLANGE MOUNT KIT

## SPECIFICATIONS

### Construction:

Cadmium plated steel; mounting flange  
top surface finished in nonreflecting black

### Hex Nut:

Wrench size 1-5/16 inch

### Recommended For:

US1700 and US1718

### Dimensions,

#### Height:

33.66 mm (1.325 in.)

#### Width:



38.10 mm (1.5 in.)

### Net Weight:

80 g (2.82 oz)

### Shipping Weight:

125 g (4.41 oz)

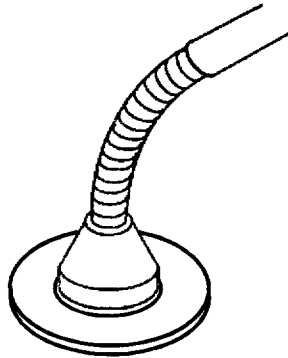

## DESCRIPTION

The 1700MF flange mount kit is a permanent mounting accessory for the US1700 and US1718 podium microphones. The kit consists of a mounting flange, washer, nut, and three set screws, and is designed for installation into panels up to 3/4-inch thick.

Mounting a US1700 or US1718 is quick and easy using the 1700FM mounting kit.

## INSTALLATION

1. Select the microphone location by first checking for obstructions under the panel that will interfere with the microphone and for a flat surface to properly seat the washer and retaining nut. Panel thickness may not exceed 3/4 inch.
2. Drill a 1-1/8-inch hole at the microphone location.
3. Set the roll-off switch on the microphone to the desired response.
4. Insert the microphone into the fixed mount adapter; secure by tightening the three set screws.
5. Insert the adapter into the drilled hole; secure this assembly with panel washer and retaining nut. Do not over-torque the retaining nut. Attach the microphone connector. For depth restrictions, a right-angle audio connector may be required.

**WARRANTY (LIMITED) —**

Electro-Voice Commercial Microphone Accessories are guaranteed for one year from date of original purchase against malfunction due to defects in workmanship and materials. If such malfunction occurs, unit will be repaired or replaced (at our option) without charge for materials or labor if delivered prepaid to Electro-Voice. Unit will be returned prepaid.

Warranty does not extend to finish, appearance items, cables, cable connectors, switches, or malfunction due to abuse or operation under other than specified conditions, nor does it extend to incidental or consequential damages. Some states do not allow the exclusion or limitation of incidental or consequential damages, so the above exclusion may not apply to you. Repair by other than Electro-Voice will void this guarantee. This warranty gives you specific legal rights, and you may also have other rights which vary from state to state.

For warranty repair, service information or a listing of the repair facilities nearest you, contact the service repair department at: 405/324-5311 or 800/444-9516.

For technical assistance, call: 800/234-6831.

Specifications subject to change without notice.

