


KEY FEATURES

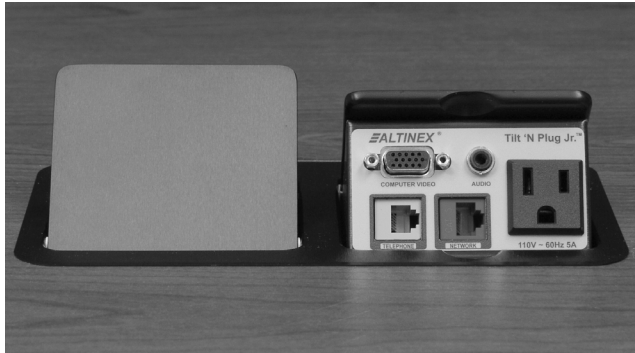

- Two input plates facing opposite directions
- Each plate/module operates independently
- Modules open/close by tilting top panel
- Multi-media & AC power connectors
- All signals pass-through to the underside of the table
- Services two users, each on opposite side of table

DESCRIPTION

The Tilt 'N Plug Jr. — Opposite Twins, model TNPI42, is one member of a family of compact interconnection solutions designed for installation into a table in a presentation system. The TNPI42 provides access connectors to computer video, audio, network, telephone and AC power connections to one or two users when they are needed, and hides them when they are not needed. The TNPI42 bezel incorporates two Tilt 'N Plug Jr. individual tower modules grouped together, side by side, each facing the direction opposite of the other. Each can be operated independently, allowing up to two users at once.


Each input plate on the TNPI42 is accessed by lifting the top panel from its front lip. This tilts the input plate into view with help from a pneumatic spring inside the unit. Once opened, the input plate remains

securely in place. The input plate is hidden by pressing down on the top panel, which closes the lid. In its closed position, the top panel lies flush with the table top.

Each input plate provides Computer Video (15-pin HD), Computer Audio (Stereo Mini), Modem (RJ11), and Network (RJ45) input connections. Each also provides an AC Power connection suitable for use throughout the U.S. and Canada.

All signals are passed through the unit with connection to the AV system being made under the table. No signal processing or buffering takes place. Separate cable bundles are provided on the underside of the unit for each input plate.

APPLICATION DIAGRAM

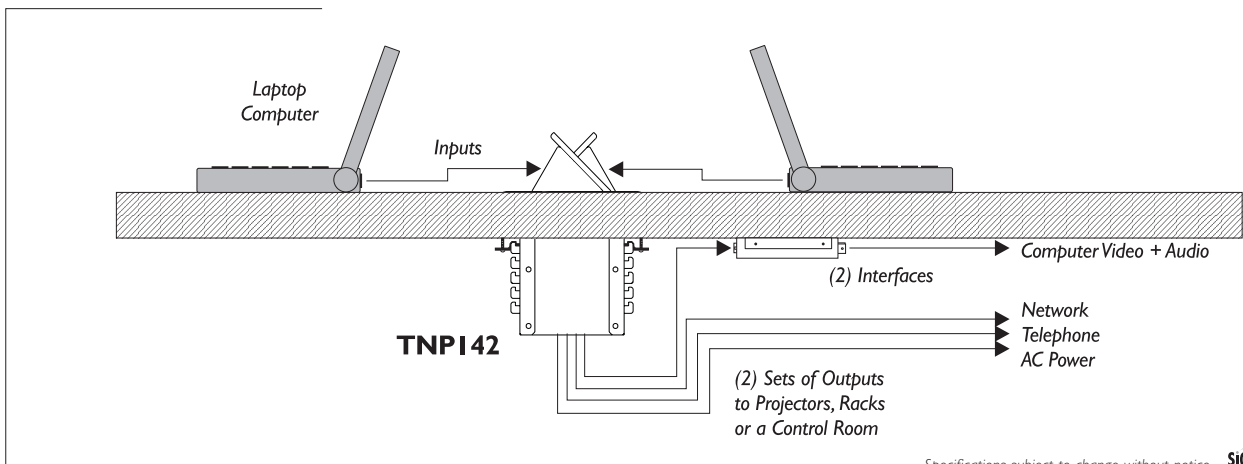

Specifications subject to change without notice.



INPUT PANEL



DIMENSIONS

