

## T252+

### Trapezoidal Stage Speaker System

- PRO™ circuit provides HF driver protection
- Roadworthy enclosure with metal corners and grille, and heavy-duty handles
- Constant-directivity 60° x 40° horn
- Two high-excursion, DL15ST 15-in. woofers
- Biampable, passive network included
- Ring-Mode Decoupling (RMD™) for increased intelligibility

---

#### Description

---

The compact, trapezoidal-shaped Electro-Voice T252+ is an 800-watt, two-way, high-efficiency, constant-directivity stage system. The system combines professional-quality components, arranged in a time-coherent vertical array, with an unusually durable Thiele-Small-aligned vented enclosure. The result is clear and articulate, high-quality sound.

The enclosure is constructed of 7-ply void-free plywood. This high-strength shell is covered with densely woven, abuse-resistant black carpeting.

The high-frequency section of the T252+ utilizes a 60° x 40° constant-directivity horn driven by a wide-bandwidth, titanium-diaphragm DH2T driver. This driver uses a unique convex-drive Time Path™ phasing plug structure (U.S. Patent #4,525,604) for smooth and extended high-frequency performance. The voice coil is coupled to the diaphragm with EV's exclusive Resonant Drive™ technology. This increases and smooths the high-frequency response and reduces the amount of internal equalization required for flat frequency response.

EV's self-resetting PRO™ circuit is built into

the crossover network to guard the compression driver from damage. If input power to the driver exceeds the nominal rating, the PRO™ circuit is activated, reducing the power delivered to the driver by 6 dB. The system will remain in this mode of operation until input power is reduced to a safe level.

The optimally vented bass section of the T252+ is designed using Thiele-Small parameters for efficient performance to below 50 Hz. Two DL15ST high-excursion 15-inch woofers feature beryllium-copper lead wires with a low-mass, extended-length, edge-wound voice coil and high-temperature materials. EV's unique Thermo Inductive Ring (TIR™) is placed on top of the pole piece, where the extended-length voice coil would normally be exposed, placing metal in close proximity to the coil and providing a major heat-transfer path that helps keep the voice coil cool. Also, the part of the magnetic structure adjacent to the coil is insulated from any rubbing contact induced by high-power inputs, using EV's exclusive PROTEF™ coating (U.S. Patent #4,547,632). The coil is driven by a massive, 16-lb magnetic structure.

---

#### Constant-Directivity Speaker System

---

The crossover frequency and speaker component geometries have been selected so that the directional characteristics of the woofer and constant-directivity horn match at the crossover frequency (approximately 90° circular coverage patterns for each) to create a special system type—the constant-directivity system. At higher frequencies, the horizontal coverage pattern remains constant and the vertical pattern smoothly transitions to a 40° angle above 4,000 Hz. Response within the 60° x 40° rated coverage angle is uniform, which means dependable audience coverage without “hot spots” or dead zones at certain frequencies. The 60° x 40° dispersion characteristic also helps avoid early reflections from nearby floor or side wall surfaces which could degrade performance. The controlled directivity of the high- and low-frequency transducers also eliminates response irregularities caused by diffraction off nearby enclosure edges and, in combination with an essentially flat on-axis frequency response, produces a total acoustic power output that is uniform with frequency.

# T252 + Trapezoidal Stage Speaker System

## Enclosure Construction

A combination of dado-cut joints, tough adhesives and proper bracing ensures a sonically dead enclosure free from panel resonances.

The densely woven, industrial-grade, abuse-resistant carpeting provides a finish that is both attractive and highly durable. Large, heavy-duty metal corner protectors, firmly secured rubber feet and recessed handles complete the picture and ensure that the T252+ speaker system is ideally suited for a long and reliable life "on the road."

## Rotating the High-Frequency Horn

The T252+ high-frequency horn may be easily rotated about its major axis, providing coverage independent of enclosure orientation. First remove the enclosure grille, then the horn. Both are affixed with #2 Phillips-head screws. Rotate the horn 90° about its axis and reinstall the components.

## Full-Range Operations

The T252+ is shipped from the factory in "full range mode". Connection to the speaker is made through either one of two Neutrik Speakon® connectors mounted on the rear of the enclosure. Pins 1+ and 1- are used.

## Biamped Operation

The T252+ is shipped from the factory in "full range mode" with its passive crossover utilized. If biamp operation is desired, this is easily achieved. The input panel/crossover assembly (on the back of the system) must first be removed using a #2 Phillips screwdriver. After removing the input panel/crossover assembly, notice the crossover instruction label on the side of the panel. There are five automotive fuses on the printed circuit board. These fuses are not functioning as fuses, but rather are functioning together as a five-pole switch. To convert the T252+ to biamp operation, move each fuse over one position. The fuses should, once again, all be in one column and nearest the word BI-AMP on the printed circuit board. Replace the input panel/crossover assembly in the enclosure and carefully replace the screws—being careful not to strip the holes. To return

the system to full-range operation, repeat the steps in a similar manner. Remember, all fuses must be arranged in one vertical column for safe, proper operation.

Neutrik Speakon® connectors are used. Pins 1+/1- are wired to the low-frequency drivers and pins 2+/2- to the high-frequency section. The high-frequency section incorporates a low-frequency blocking capacitor with a 3-dB-down point of 800 Hz and PRO™ circuit autoresetting overload protection.

## Frequency Response

The combination of two 15-inch woofers, wide-bandwidth high-frequency driver and an equalized crossover results in the wide and smooth overall response shown in Figure 1. The T252+'s axial frequency response was measured in Electro-Voice's large anechoic chamber at a distance of 10 feet with a swept sine-wave input of 4 volts. Figure 1 has been averaged and corrected for 2.83 V/1 meter.

## Directivity

A unique feature of the T252+ is the constant-directivity dispersion provided by the 60° x 40° horn. The polar response of the system at selected one-third-octave bandwidths is shown in Figure 2. These polar responses were measured in an anechoic environment at 10 feet using one-third-octave pink-noise inputs. The frequencies selected are fully representative of the polar response of the system. Beamwidth of the system utilizing the complete one-third-octave polar data is shown in Figure 3.  $R_0$  and directivity index (D<sub>i</sub>) are plotted in Figure 4.

## Power-Handling Capacity

The T252+ is designed to withstand the power test described in EIA Standard RS-426A. The EIA test spectrum is applied for eight hours. To obtain the spectrum, the output of a white-noise generator (white noise is a particular type of random noise with equal energy per bandwidth in Hz) is fed to a shaping filter with 6-dB-per-octave slopes below 40 Hz and above 318 Hz. When measured with an analyzer having the usual constant-percentage bandwidth (one-third oc-

tave), this shaping filter produces a spectrum whose 3-dB-down points are at 100 Hz and 1,200 Hz with a 3-dB-per-octave slope above 1,200 Hz. This shaped signal is sent to the power amplifier with the continuous power set at 800 watts into the 3.2-ohm EIA equivalent impedance (50.6-volts true rms). Amplifier clipping sets instantaneous peaks at 6 dB above the continuous power, or 3,200-watts peak (101.2-volts peak). This procedure provides a rigorous test of both thermal and mechanical failure modes.

The specifications also include a two-hour rating for the purpose of comparing competitive products to the T252+.

## Architects' and Engineers' Specifications

The loudspeaker system shall be a two-way, full-range design consisting of two 381-mm (15-inch) woofers in a vented, trapezoidal-shaped enclosure, a high-frequency compression driver mounted on a 60° x 40° constant-directivity horn and a passive crossover/equalizer network. The loudspeaker shall meet the following performance criteria: frequency response of 50-16,000 Hz, -3 dB; power handling of 800-watts long term and 3,200-watts short term with a shaped random-noise input per EIA Standard RS-426A; sensitivity of 101-dB SPL at 1 meter with a 2.83-V, 300-2,000-Hz pink-noise input; 6-dB-down horizontal coverage angle of 106° ±60° in the 250-20,000-Hz range; 6-dB-down vertical coverage angle of 40° ±11° in the 5,000-20,000 Hz range; crossover frequency of 2,200 Hz; nominal impedance of 4 ohms; and minimum impedance of 3.2 ohms. Input connections shall be two paralleled Neutrik Speakon® connectors and ¼-inch phone jacks. The enclosure shall be constructed of 7-ply void-free plywood covered in black carpet and fitted with a black steel grille, metal corner protectors, rubber feet and two recessed carrying handles. Dimensions shall be 1.245 m (49.0 in.) tall, 488 mm (19.2 in.) wide at front, 229 mm (9.0 in.) wide at rear, and 599 mm (23.6 in.) deep. Net weight shall be 54 kg (118 lb).

The loudspeaker system shall be the Electro-Voice T252+.

# T252 + Trapezoidal Stage Speaker System

## Uniform Limited Warranty

Electro-Voice products are guaranteed against malfunction due to defects in materials or workmanship for a specified period, as noted in the individual product-line statement(s) below, or in the individual product data sheet or owner's manual, beginning with the date of original purchase. If such malfunction occurs during the specified period, the product will be repaired or replaced (at our option) without charge. The product will be returned to the customer prepaid.

**Exclusions and Limitations:** The Limited Warranty does not apply to: (a) exterior finish or appearance; (b) certain specific items described in the individual product-line statement(s) below, or in the individual product data sheet or owner's manual; (c) malfunction resulting from use or operation of the product other than as specified in the product data sheet or owner's manual; (d) malfunction resulting from misuse or abuse of the product; or (e) malfunction occurring at any time after repairs have been made to

the product by anyone other than EVI Audio Service or any of its authorized service representatives. **Obtaining Warranty Service:** To obtain warranty service, a customer must deliver the product, prepaid, to EVI Audio Service or any of its authorized service representatives together with proof of purchase of the product in the form of a bill of sale or receipted invoice. A list of authorized service representatives is available from EVI Audio Service at 600 Cecil Street, Buchanan, MI 49107 (800/234-6831 or FAX 616/695-4743). **Incidental and Consequential Damages Excluded:** Product repair or replacement and return to the customer are the only remedies provided to the customer. Electro-Voice shall not be liable for any incidental or consequential damages including, without limitation, injury to persons or property or loss of use. Some states do not allow the exclusion or limitation of incidental or consequential damages so the above limitation or exclusion may not apply to you. **Other Rights:** This warranty gives you specific legal rights, and you may also

have other rights which vary from state to state.


**Electro-Voice Speakers and Speaker Systems** are guaranteed against malfunction due to defects in materials or workmanship for a period of five (5) years from the date of original purchase. The Limited Warranty does not apply to burned voice coils or malfunctions such as cone and/or coil damage resulting from improperly designed enclosures. Electro-Voice active electronics associated with the speaker systems are guaranteed for three (3) years from the date of original purchase. Additional details are included in the Uniform Limited Warranty statement.

For warranty repair, service information, or a listing of the repair facilities nearest you, contact the service repair department at: 616/695-6831 or 800/685-2606.

**For technical assistance,** contact Technical Support at 800/234-6831 or 616/695-6831, M-F, 8:00 a.m. to 5:00 p.m. Eastern Standard time.

Specifications subject to change without notice.

**Figure 1—T252+ Axial Frequency Response, 2.83 V/1 Meter**

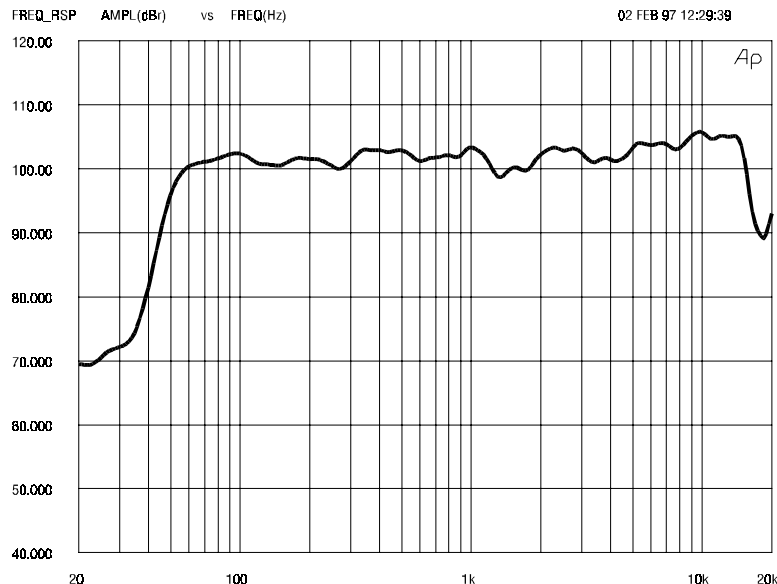


# T252 + Trapezoidal Stage Speaker System

Figure 2— T252+ Polar Response (one-third-octave pink noise, 4 volts/10 feet)

5 dB per division


--- HORIZONTAL  
 — VERTICAL

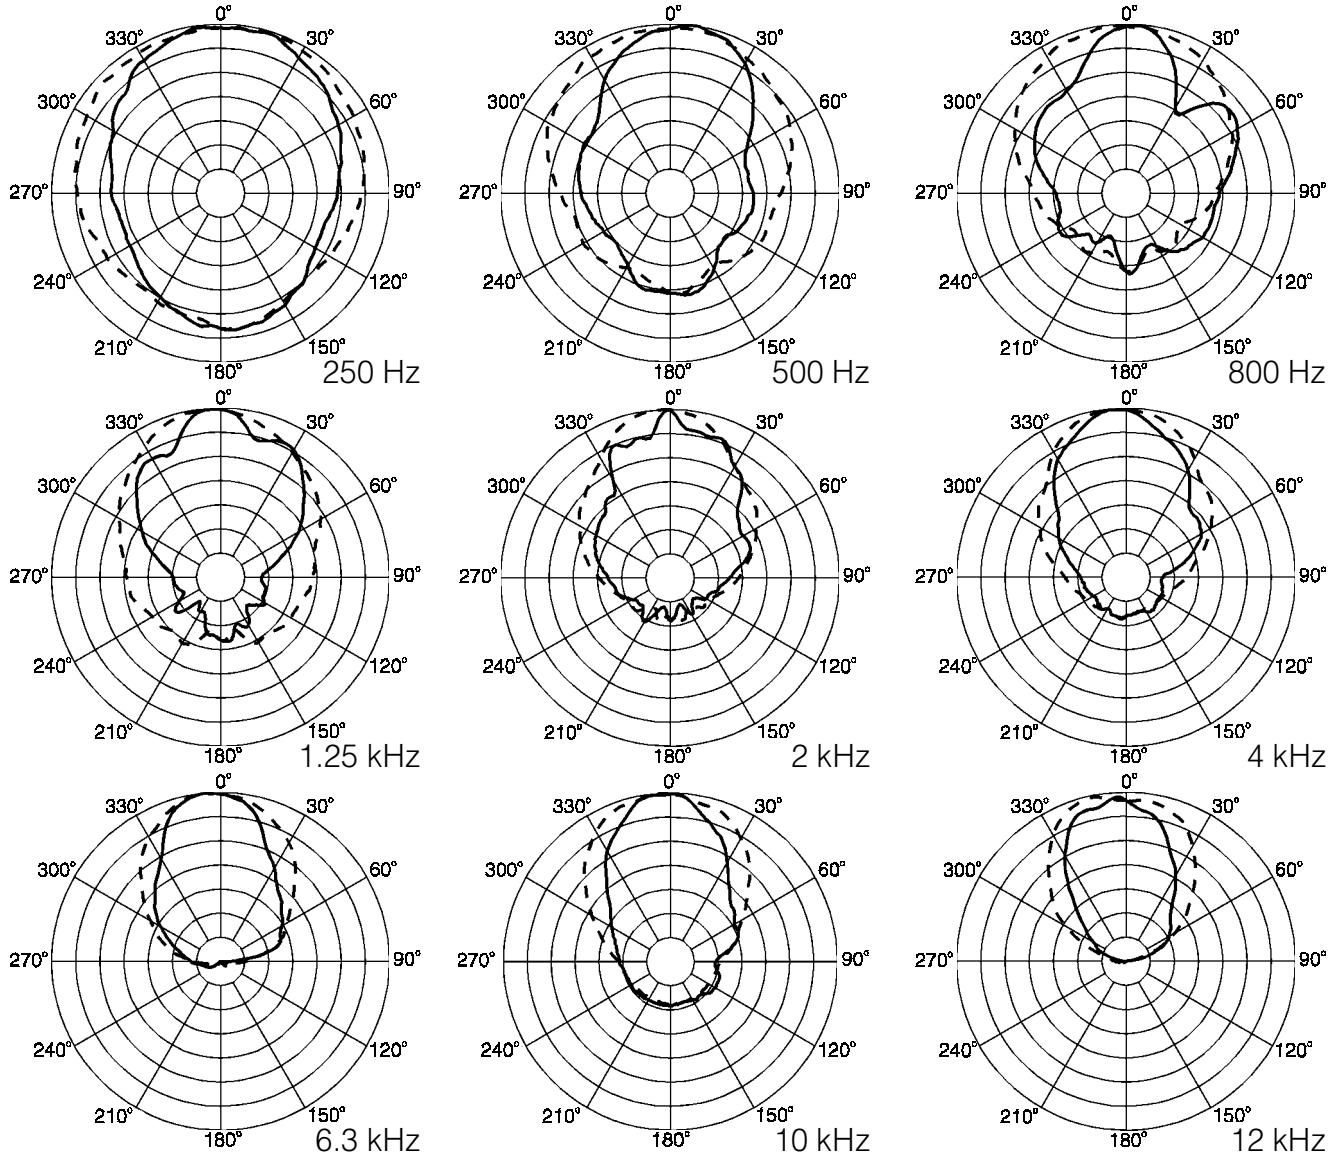


T252 + Trapezoidal Stage Speaker System

# T252 + Trapezoidal Stage Speaker System


**Figure 3—T252+ Beamwidth vs. Frequency, Whole Space (anechoic)**

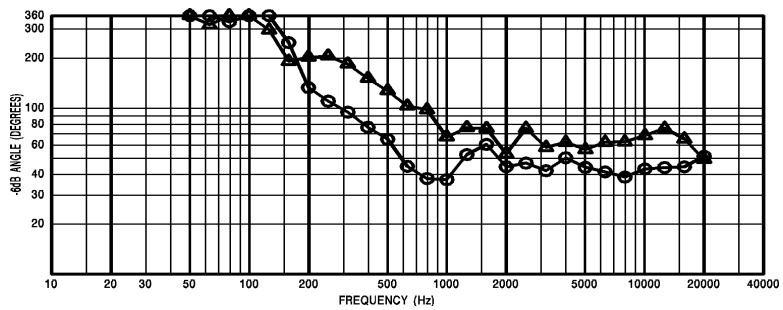

**Figure 4—T252+ Directivity vs. Frequency, Whole Space (anechoic)**

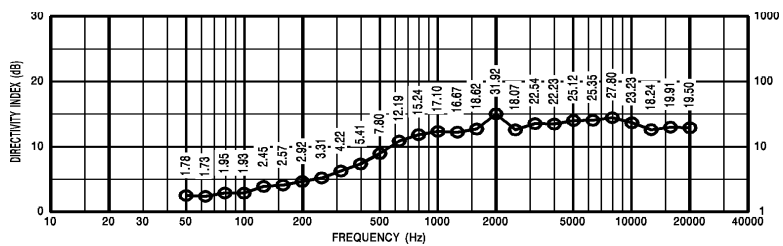

**Figure 5—T252+ Response (80 W), 10% Rated Input Power (on axis at 1 meter from system)**

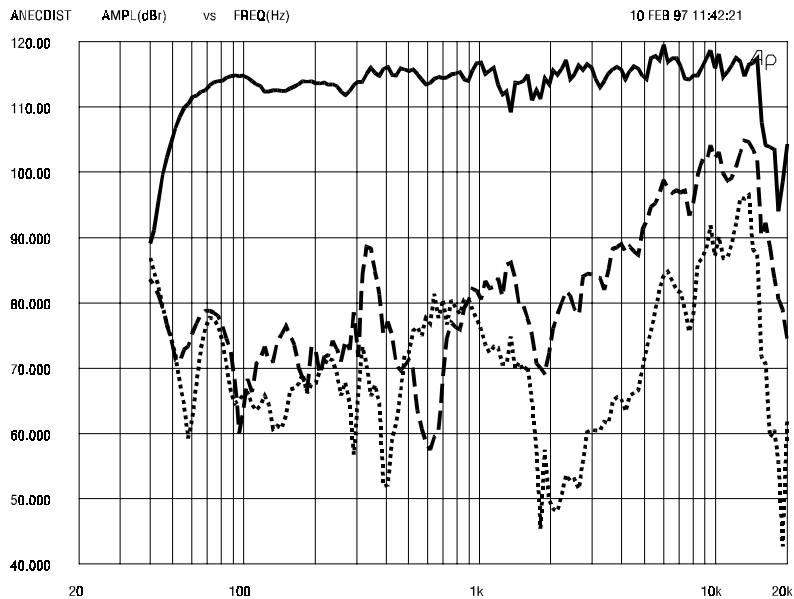

# T252 + Trapezoidal Stage Speaker System

## Specifications

**Frequency Response, Measured at 10 Feet on Axis, Swept  $\frac{1}{3}$ -octave, Half-Space Anechoic Environment (see Figure 1. Curve shown has been normalized for 1 watt/1 meter):**  
50-16,000 Hz

**Low-Frequency 3-dB-Down Point:**  
50 Hz

**Usable Low-Frequency Limit (10-dB-down point):**  
44 Hz

**Half-Space Reference Efficiency:**  
8.2%

**Long-Term Average Power-Handling Capacity per EIA Standard RS-426A (see Power-Handling Capacity section):**  
800 watts, 8 hours  
1,000 watts, 2 hours

**Recommended Crossover Frequency:**  
1,200 Hz

**Crossover Slopes, Recommended:**  
24-dB per octave

**Minimum:**  
12-dB per octave

**Long-Term Average Power-Handling Capacity (see Power-Handling Test section),**  
**Low Frequency (per EIA RS-426-A 1980):**  
800 watts  
**High Frequency (per AES2-1984/ANSI S4.26-1984):**  
60 watts

**Sensitivity (far-field SPL referred to 1 meter, 2.83-volts input, anechoic environment, band-limited pink noise),**  
**Low Frequency (100-800 Hz):**  
101 dB  
**High Frequency (500-5,000 Hz):**  
112 dB

**SPL at Full Power (far-field SPL at 2.83 volts/1 meter referred to full power, anechoic environment, band-limited pink noise), Long-Term Average/Peak,**

**Low Frequency (100-1,200 Hz):**

127 dB/133 dB

**High Frequency (1,200-5,000 Hz):**

129 dB/135 dB

**Impedance,**

**Nominal (low frequency/high frequency):**

4 ohms/8 ohms

**Minimum (low frequency/high frequency):**

3.2 ohms/6.0 ohms

**Average Efficiency,**

**Low Frequency: 5%**

**High Frequency: 25%**

**Nominal Coverage Angle,**

**Horizontal: 60°**

**Vertical: 40°**

**Beamwidth (angle included by 6-dB-down points on polar responses, indicated one-third-octave bands of pink noise, see Figure 3)**

**2,500 to 16,000 Hz Horizontal:**

60° (+12°, -1°)

**500 to 16,000 Hz Vertical:**

40° (+2°, -12°)

**Directivity Factor  $R_q(Q)$ , 500- to 16,000-Hz Median (see Figure 4):**

18.0 (+8.7, -8.5)

**Directivity Index  $D_i$ , 500- to 16,000-Hz Median (see Figure 4):**

12.6 dB (+9.4 dB, -9.3 dB)

**Distortion Response (80 W), 10%**

**Rated Input Power (on axis at 1 meter from system; see Figure 5),**

**Second Harmonic,**

**100 Hz: .25%**

**1,000 Hz: 1.53%**

**10,000 Hz: 17.82%**

**Third Harmonic,**

**100 Hz: 0.3%**

**1,000 Hz: 0.95%**

**10,000 Hz: 3.97%**

**Transducer Complement,**

**Low Frequency:**

Two DL15ST 381-mm (15-in.) woofers in a vented enclosure

**High Frequency:**

HP64M 60° x 40° horn mounted to DH2T compression driver

**Box-Tuning Frequency:**

55 Hz

**Driver Protection, High Frequency:**

Solid-state self-resetting circuit (PRO™ circuit) drops input 6 dB; blocking capacitor with 800-Hz corner frequency and 6-dB-per-octave slope

**Enclosure Materials and Color:**

Black, 7-ply void-free carpet-covered plywood

**Grille:**

Black powder-coated, vibration-resistant steel, removable

**Dimensions,**

**Height:**

1.245 m (49.0 in.)

**Width at Front:**

488 mm (19.2 in.)

**Width at Rear:**

229 mm (9.0 in.)

**Depth:**

599 mm (23.6 in.)

**Side-Wall Draft Angle:**

10°

**Net Weight:**

52 kg (114 lb)

**Shipping Weight:**

58.6 kg (129 lb)

## Electro-Voice®

600 Cecil Street, Buchanan, MI 49107

616/695-6831, 616/695-1304 Fax

©EVI Audio 1997 • Litho in U.S.A.