


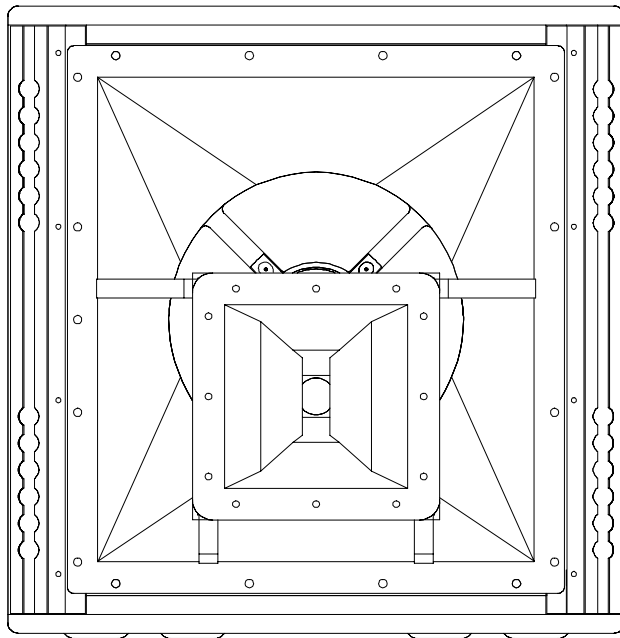

Xcn

X-Array™ Two-Way, MB/HF System

- MB and HF sections are identical to Xn
- Ring-Mode Decoupling (RMD™) provides accurate transient detail
- Near-field 60° x 40° rotatable coverage pattern
- Neodymium ND5 HF and ND12A MB drivers
- Unique rear-hinge rigging
- Enclosure shell and rigging identical to all of the half-size X-Array™ systems

Description

The X-Array™ product line represents important advancements in concert-sound-reinforcement technology. The design goals called for the highest acoustic output capability with the highest fidelity in lightweight, compact enclosures that were easy to array. The development began with a clean sheet of paper and took an integrated approach. The individual loudspeaker drivers, horns, enclosures, rigging hardware and system configurations were designed from the ground up specifically for this high-performance application.

The Xcn is an active near-field, two-way, MB/HF loudspeaker system with a rotatable 60° x 40° coverage pattern. The high-frequency and mid-bass sections are horn loaded with one driver in each frequency band, and the HF horn/driver combination is mounted coaxially inside the mid-bass horn. The mid-bass and high-frequency sections are identical to that of the full-size Xn X-Array™ system. The horns and drivers were designed as part of the Xcn development and represent a step forward in state-of-the-art loudspeaker design in terms of high acoustic output with low distortion and low power compression. Electro-Voice engineers developed a new technology dubbed Ring-Mode

Decoupling (RMD™) to substantially improve clarity and intelligibility by reducing both linear and nonlinear resonance modes that color the sound.

The high-frequency driver in the Xcn is the ND5, which is a 3.56-mm (1.4-in.) exit high-frequency compression driver that features a powerful neodymium motor structure that was optimized for maximum efficiency and reduced power compression. A new 76.2-mm (3.0-in.)-diameter titanium diaphragm assembly provides increased instantaneous peak output capability and reduced dome breakup. The ND5 is mounted on a 60° x 40° rotatable constant-directivity horn. This combination results in substantially improved vocal clarity and presence with a smooth response throughout the vocal range up to 20,000 Hz. The horn and driver are nested inside the mid-bass phase plug assembly to minimize interference in the mid-bass band.

The mid-bass driver in the Xcn is the ND12A, which is a 30.5-mm (12-in.) mid-bass driver that features a powerful new neodymium motor structure that was optimized for maximum horn-loaded efficiency and reduced power compression. A new Kevlar®-reinforced cone assembly provides a smooth response with reduced cone break up. The ND12A is mounted on a mid-bass horn that has a coverage pat-

tern that transitions smoothly into the rotatable 60° x 40° high-frequency pattern. The mid-bass phase plug provides optimal loading for the ND12A driver, delivering smooth response and extended efficiency up to 2,000 Hz. This combination results in improved vocal intelligibility and clarity with a smooth response from the lower-to-mid vocal range.

Ring-Mode Decoupling, (RMD™) is a technique utilized and named by Electro-Voice to describe a process used to improve sound quality in loudspeaker systems. RMD™ offers a solution to a very fundamental problem. It has long been recognized that two different loudspeaker systems can sound different even though they both may be equalized to have the same frequency response. This difference is due to a variety of resonances, or ring modes, that color the sound. Although this ringing may be very low in level compared to the program material, it is still audible. The source of these resonances may be mechanical or acoustical in nature or a combination of both. In addition, they may be linear or nonlinear, resulting in their character changing with level. Furthermore, these ring modes may be aggravated when multiple loudspeaker enclosures are assembled into arrays. The result is a coloration that decreases intelligibility and clar-

Xcn Two-Way MB/HF System

ity with the nature of that coloration varying with level. Often, the listener perceives that coloration as imbalance in the frequency response, and will attempt to electronically adjust the system to restore the spectral balance. However this electronic equalization has the negative effect of changing the program material itself.

Ring-Mode Decoupling (RMD™) addresses mechanical resonances with mechanical solutions, and acoustical resonances with acoustical solutions. In the Xcn development, RMD™ was applied at every level – to the individual mid-bass and high-frequency drivers, the mid-bass and high-frequency horns, the mid-bass chamber, the interaction between the mid-bass and high-frequency bands and the interaction between multiple enclosures.

The design process included, for example, the driver diaphragm, cone, suspension and phase-plug geometry and materials, horn geometry and materials, enclosure geometry and materials, absorptive materials, etc. The result is a dramatic improvement in clarity and with a much more neutral sound (a lack of coloration), with the loudspeaker system maintaining its sonic integrity from the very-lowest sound-pressure levels, to the very-highest sound-pressure levels. This means that the front-of-house engineer will not have to retune the EQ and level settings as the SPL is increased throughout the show. This also means that the sound-system performance will remain consistent in different array configurations and from venue to venue.

The X-Array™ systems utilizes a unique rigging system. A hinge assembly is used to link cabinets together at their rear corners, while wire-rope/fitting assemblies are used at the front to adjust the relative angle between systems. (See the *Flying the X-Array™ Systems* section for more details.) The Xcn utilizes the half-size X-Array™ enclosure shell, which is identical to that of the Xcb bass system. They have the same footprint and rigging as the full-size X-Array™ systems; however, the height of the compact systems is approximately half that of the full-size systems.

The durable Xcn enclosure is constructed

of 18-mm, 13-ply birch plywood and has a wear-resistant black, textured paint finish. The system is trapezoidal, forming an 18° wedge, and includes a heavy-duty steel grille with a water-resistant charcoal-gray foam interlining. The enclosure features vinyl bumper pads on the front corners and feet on the bottom to resist wear. A variety of accessories are available for the X-Array™ loudspeaker systems, including rigging hardware, dollies, covers, electronic crossovers, amplifier racks and speaker cabling. Consult the *X-Array™ Accessories* section for a complete listing the available accessories.

Applications

The X-Array™ loudspeaker systems were designed for optimal performance in both concert-sound and permanent-installation applications where studio-monitor sound quality is required at concert-sound levels. The X-Array™ loudspeaker systems work well individually, in small arrays and in large arrays. The high-acoustic output from these compact, lightweight systems provide the highest acoustic-power-to-weight ratio, the highest acoustic-power-to-frontal-area ratio, and the highest acoustic-power-to-bulk-volume ratio in the industry. That means that X-Array™ systems will be considerably smaller and lighter compared to competitive systems having equivalent acoustic output.

The 60° x 40° coverage pattern of the Xcn makes it ideal for sound-reinforcement applications with short- to medium-throw requirements. With its response from 125-20,000 Hz, the Xcn is recommended for mid-bass/high-frequency applications, and should be used with an X-Array™ bass box (like the Xb, Xcb or Xds) for full-range performance. The Xcn may be used individually or in multiples to construct arrays. In addition, the Xcn may be used with the MB/HF- or LF/MB/HF X-Array™ loudspeaker systems (like the Xf, Xn or Xcn) to construct large full-range arrays. The Xcn enclosure is identical to that of the other half-size X-Array™ systems (like the Xcb). The footprint of the half-size X-Array™ enclosures is identical to that of the full-

size X-Array™ systems (like the Xn, Xf and Xb), as is the rigging hardware, making array integration easy whether flying or stacking. The rotatable horn pattern offers tremendous flexibility to tailor the pattern to the application. For example, the 60°H x 40°V orientation would be well suited for front-of-house, front-fill and side-fill applications while the 40°H x 60°V orientation would be well suited for down-fill applications.

The Xcn is a two-way active system that requires an active electronic crossover. Both the Electro-Voice Dx38 and Klark Teknik DN8000 digital crossovers are recommended for signal control. (See the *Crossover, Equalization and Signal Delay Controller* section.) The Electro-Voice P3000 amplifier is recommended for powering the Xcn. (See the *Amplifier Recommendations* section.)

Power-Handling Capabilities

The Xcn systems are rated as per the “ANSI/EIA RS-426-A Loudspeaker Power Rating, Full Range Test,” which uses a shaped-random-noise signal to simulate typical music to test the mechanical and thermal capabilities of the loudspeakers. A digital crossover was used to provide the appropriate filtering and equalization. The test parameters are as follows:

High-Frequency Section

$P_{E(MAX)}$:	75 watts
Test Voltage:	30.1-volts rms 60.2-volts peak
$R_{SR} (1.15 R_E)$:	12.1 ohms

Mid-Bass-Frequency Section

$P_{E(MAX)}$:	300 watts
Test Voltage:	45.5-volts rms 91.0-volts peak
$R_{SR} (1.15 R_E)$:	6.90 ohms

Amplifier Recommendations

Power amplifiers with the following ratings are recommended for use with the Xcn loudspeaker systems:

HF:	800 watts per channel into 8 ohms
-----	--------------------------------------

	93-volts rms short term
	132-volts peak
MB:	800 watts per channel into 8 ohms
	93-volts rms short term
	132-volts peak

Xcn loudspeakers may be paralleled with other Xcn systems as long as the amplifiers can drive the lower impedances. To maintain a sufficient damping factor with long cable runs, amplifier loads of four ohms per channel are recommended. The Electro-Voice P3000 amplifiers are ideal for powering the X-Array™ systems.

Crossover, Equalization and Signal Delay Controller

The Xcn is a two-way active loudspeaker system requiring an active crossover, equalization and signal delay controller. For basic applications, the Electro-Voice Dx38 2-in/4-out controller is recommended. For more sophisticated applications, the Klark Teknik DN8000 2-in/ 5-out controller is recommended. Linkwitz-Riley crossover filters with a minimum slope of 24-dB per octave at 125 Hz and 1,760 Hz are recommended. Both the Dx38 and the DN8000 offer appropriate filtering, equalization and signal delay capabilities to provide optimum performance of the X-Array™ loudspeaker systems. Digital parameter settings for both controllers are available upon request.

Electrical Connection and System Wiring

Two paralleled Neutrik 8-pin Speakon® connectors are used for electrical connection to the Xcn loudspeakers with the following pin assignments:

HF:	Pins 4 Paralleled
MB:	Pins 3 Paralleled

The Xcn wiring diagram is shown in Figure 7. Since the connectors are paralleled, it does not matter which connector is used as the input or output when paralleling Xcn systems. Although Pins 1 and 2 are not used by the Xcn systems, they are paralleled on the input panel. This allows an X-Array™ bass box (like the Xb or Xcb –

which use Pins 1 and 2, but not Pins 3 and 4) to be paralleled with an Xcn, allowing all eight conductors to be used with a single cable run to the amplifiers. Note that when four Xcn systems are jumped from one to another, the amplifier home-run cable will have four high-frequency drivers on Pins 4 (for a 4-ohm load) and four mid-bass drivers on Pins 3 (for a 4-ohm load).

Flying the X-Array™ Systems

The X-Array™ loudspeaker systems all utilize the same rigging hardware and have the same structural strength ratings. Thus, different systems may be mixed in an array to achieve the best acoustic results. The rigging system allows for the smallest possible spacing between adjacent enclosures, and utilizes quick-release rigging fittings for fast installation and tear down.

When flown, the X-Array™ enclosures are linked together by two removable hinges on the rear of the enclosures at the top and bottom. This arrangement enables the enclosures to pivot vertically from the rear corners. The relative vertical angle between adjacent enclosures is adjustable and set by two removable rigging straps on the front of the enclosures at the top and bottom. Both the rear rigging hinges and the front rigging straps are installed when enclosures are sitting on top of one another. For ease of installation of the hinges and straps, the enclosures self align using feet and cups mounted on the top and bottom of the enclosures. The relative horizontal angle between adjacent columns of loudspeakers is set by adjustable grids at the top of the array (or by custom-building attachment supports in permanent-installation applications where grids are not used).

The removable proprietary rear rigging hinges utilize all-steel construction and are secured into a proprietary track assembly on the enclosure (similar to the heavy-duty aircraft L-track). The aluminum track is extruded as a single-piece track/angle-bracket assembly and ties into the top, bottom and rear of the enclosure. Metal bars inside the enclosure tie the top and bottom track/angle-bracket assemblies together, minimizing the load applied to the wooden enclosure.

The rear extrusion will accommodate the New Haven 32102-2 aircraft-type double-stud locking fitting instead of the hinge for applications requiring a lower strength rating.

The removable front strap assemblies utilize all-steel New Haven 32102-2 aircraft-type double-stud locking fittings and wire rope, and are secured into another proprietary track similar to the heavy-duty aircraft L-track. The track is extruded as a single-piece track/angle-bracket assembly that ties into the front and side of the enclosure. The track/angle-bracket assembly extends from the top to the bottom of the enclosure, eliminating the load applied to the wooden enclosure.

A complete line of flying-hardware accessories is available for the X-Array™ loudspeaker systems including a grid, rigging hinges and rigging straps. The variety of rigging hinges and front rigging straps available include those for linking two enclosures together, securing the top enclosure in a column to a grid, and for picking up the top enclosure in a column without a grid. Consult the *X-Array™ Accessories* section for a complete listing the available rigging accessories.

The total weight of a column of X-Array™ loudspeaker systems that may be supported by the X-Array™ rigging system varies from 454-726 kg (1,000-1,600 lb) depending on the rigging configuration details. An *X-Array™ Flying Manual* is available from Electro-Voice and is included with each X-Array™ system shipment. The manual should be consulted for complete structural specifications and detailed instructions for safely suspending and using the X-Array™ systems.

Field Replacement

Normal service for the Xcn requires only a #2 Phillips screwdriver and a 3/16-inch hex-key wrench. The drivers may be accessed as follows:

HF: First remove the grille, then remove the screws securing the front flange of the high-frequency horn. Lift the horn and driver out of the shroud assembly. In the event of failure, the diaphragm assembly

Xcn Two-Way, MB/HF System

can be replaced with the driver attached to the horn.

MB: Remove the screws securing the hatch on the back of the enclosure and lift the hatch out. Remove the screws securing the 12-inch driver and lift the driver out of the enclosure. In the event of failure, the entire driver must be replaced.

The following service parts are available from the service department in Buchanan, Michigan USA:

HF: #84423-XX 16-ohm ND5-16

diaphragm kit

#827-2973 ND5-16 complete driver

MB: #812-2858 ND12A complete driver

LF: #818-2883 EVX-180B complete driver

The complete drivers are available only for repair replacement and are not available for general sale.

Architects' and Engineers' Specifications

The loudspeaker system shall be a three-way, active, coaxial, MB/HF system with a frequency response from 125-20,000 Hz with crossover frequencies at 125 and 1,760 Hz and a rotatable 60° x 40° constant-directivity coverage pattern. The loudspeaker system shall have a high-frequency compression driver mounted on a 60° x 40° constant-directivity horn, and shall have a 16-ohm, 76.2-mm (3-in.) diameter voice coil, a 76.2-mm (3-in.) titanium dome, a 35.6-mm (1.4-in.) exit, a neodymium magnetic motor structure, and a 75-watt power rating. The loudspeaker system also shall have a 305-mm (12-in.) mid-bass driver mounted on a mid-bass horn, and shall have a 16-ohm, 63.5-mm (2.5-in.) diameter voice coil, a neodymium magnetic motor structure, and a 300-watt power rating. The loudspeaker shall have a rigging system enabling a column of loudspeakers to be hinged at their back corners with relative downward angles set by adjustable rigging straps at the front. The enclosure shall be constructed of 18-mm thick, 13-ply birch plywood, and shall be trapezoidal forming an 18° wedge, and be 596 mm (23.46 in.) high, 584 mm (23.00 in.) wide at the front, 354 mm (13.93 in.) wide at the back and

759 mm (29.88 in.) deep and shall weigh 60.8 kg (134 lb). The loudspeaker system shall be the Electro-Voice Xcn.

Rigging Accessories

Grid: This ATM Fly-Ware™ "T"-shaped, all-steel-construction grid was specifically designed as a single column of X-Array™ systems. Multiple grids can be linked together with couplers on front and back retractable arms, the position of which sets the splay angle between adjacent columns. Part number MEGS-4000-T. ATM Fly-ware™, 2100 S. Wilmington Ave., Carson, CA 90810 USA, 310/834-5914

Xrhg Grid Hinge: Two Xrhg grid rigging hinges are used to attach the rear of the top enclosure in a column to the rear of an X-Array™ compatible grid. Each hinge consists of two precision-machined steel rigging-track fittings connected by an alloy-steel chain. Part number 510-2999. Electro-Voice, 600 Cecil St., Buchanan, MI 49107 USA, 616/695-6831 or 800/234-6831

Xrhp Pickup Hinge: Two Xrhp pickup rigging hinges are used to create custom rigging assemblies to attach to the rear of the top enclosure in a column when an ATM grid is not used. Each hinge consists of one precision-machined steel rigging-track fitting with an alloy-steel chain. Part number 510-3000. Electro-Voice, 600 Cecil St., Buchanan, MI 49107 USA, 616/695-6831 or 800/234-6831

Xrhl Linking Hinge: Two Xrhl linking rigging hinges are used to link two enclosures together at the rear. Each hinge consists of two precision-machined steel rigging-track fittings connected by a heavy-duty steel hinge. Part number 510-2998. Electro-Voice, 600 Cecil St., Buchanan, MI 49107 USA, 616/695-6831 or 800/234-6831

Xrsl Long Rigging Steel Straps: Two Xrsl long rigging straps are used at the front of two enclosures to adjust their relative vertical angles. The Xrsl may also be used to attach the front of the top enclosure to the ATM grid when upward angles are not required. Each all-steel strap consists of two New Haven NH32102-2 double-stud fittings connected by black plastic-coated

wire rope. Sound Manufacturing Inc., 3336 Primera Ave., Hollywood, CA 90068 USA, 213/850-5042 or ATM Fly-ware™, 2100 S. Wilmington Ave., Carson, CA 90810 USA, 310/834-5914

Xrss Short Rigging Steel Straps: Two Xrss short rigging straps are used to attach the front of the top enclosure to the ATM grid. The Xrss may also be used at the front of two enclosures when a limited range of vertical angles are required. The all-steel Xrss utilizes the same construction as the Xrsl. Sound Manufacturing Inc., 3336 Primera Ave., Hollywood, CA 90068 USA, 213/850-5042 or ATM Fly-ware™, 2100 S. Wilmington Ave., Carson, CA 90810 USA, 310/834-5914

General Rigging Supplies: A wide variety of standard and specialty rigging hardware components for both touring and permanent-installation applications is available. Sound Manufacturing Inc., 3336 Primera Ave., Hollywood, CA 90068 USA, 213/850-5042 or ATM Fly-ware™, 2100 S. Wilmington Ave., Carson, CA 90810 USA, 310/834-5914

Electronic Accessories

Klark Teknik DN8000 Digital Controller: The DN8000 digital electronic loudspeaker controller has a two-in/five-out architecture, with each output having programmable high-pass and low-pass filters, four-band equalization, signal delay, compressor-limiter-and noise-gate functions. Program parameters for optimal performance of the X-Array™ systems are available. Klark Teknik, Klark Industrial Park, Walter Nash Road, Kidderminster, Worcestershire DY11 7HJ England, 44-156-274-1515

Electro-Voice Dx38 Digital Controller: The Dx38 digital electronic loudspeaker controller has a two-in/four-out architecture, with each output having programmable high-pass and low-pass filters, four-band equalization, signal delay compressor and limiter functions. Program parameters for optimal performance of the X-Array™ systems are available. Electro-Voice, 600 Cecil St., Buchanan, MI 49107 USA, 616/695-6831

Xcn Two-Way, MB/HF System

Electro-Voice P3000 Power Amplifiers:

The stereo P3000 power amplifiers are rated at 800 watts into 8 ohms, or 93-volts rms short term. The amplifiers are 3-U high and weigh 28 kg (62 lb) each. Electro-Voice, 600 Cecil St., Buchanan, MI 49107 USA, 616/695-6831

X-Array™ Amplifier Racks: These 16-U racks will hold four Electro-Voice P3000 power amplifiers, one Klark Teknik DN8000 digital controller, 1-U light module, and a 2-U multipin patch panel. The aluminum-frame/wood-panel racks are vibration-isolation mounted on heavy-duty wheel boards and come prewired for AC power, audio and control signal sends and Neutrik® Speakon speaker connectors. db Sound, L.P., 1219 Rand Road, Des Plaines, IL 60016 USA, 847/299-0357

X-Array™ Speaker Cables: Eight conductor cable with four #11 AWG conductors and four #13 AWG connectors. The larger conductors are used in the LF bands for increased damping factor. Lengths made to order. Standard terminations are Neutrik Speakon™ NL8FC connectors wired to X-Array™ standards; however, custom terminations are available. Entertainment Technology Cable, 1247 Rand Road, Des Plaines, IL 60016 USA, 800/529-6312

Miscellaneous Accessories

X-Array™ Loudspeaker Covers: Heavy-duty covers are available for the X-Array™ speakers. These covers wrap around the enclosures, while sitting on a dolly, and Velcro together at the back for fast installation and removal. db Sound, L.P., 1219 Rand Road, Des Plaines, IL 60016 USA, 847/299-0357

X-Array™ Dolly Boards: Double-wide dolly built to hold four X-Array™ loudspeakers, two wide by two high. The double-thick 18-mm birch-plywood construction includes cutouts and keys for loudspeaker enclosure shape and alignment feet. The dolly boards are painted black and utilize four extra-heavy-duty 4-inch x 2-inch casters. Custom-designed dolly boards are also available to meet spe-

cific requirements. R&R Cases and Cabinets, 1217 Rand Road, Des Plaines, IL 60016 USA, 847/299-8100

Racks and Road Cases: A variety of general purpose, custom racks and hard-shell road cases are available for touring or permanent-installation applications. R&R Cases and Cabinets, 1217 Rand Road, Des Plaines, IL 60016 USA, 847/299-8100

Limited Warranty

Electro-Voice products are guaranteed against malfunction due to defects in materials or workmanship for a specified period, as noted in the individual product-line statement(s) below, or in the individual product data sheet or owner's manual, beginning with the date of original purchase. If such malfunction occurs during the specified period, the product will be repaired or replaced (at our option) without charge. The product will be returned to the customer prepaid. **Exclusions and Limitations:** The Limited Warranty does not apply to: (a) exterior finish or appearance; (b) certain specific items described in the individual product-line statement(s) below, or in the individual product data sheet or owner's manual; (c) malfunction resulting from use or operation of the product other than as specified in the product data sheet or owner's manual; (d) malfunction resulting from misuse or abuse of the product; or (e) malfunction occurring at any time after repairs have been made to the product by anyone other than Electro-Voice Service or any of its authorized service representatives. **Obtaining Warranty Service:** To obtain warranty service, a customer must deliver the product, prepaid, to Electro-Voice Service or any of its authorized service representatives together with proof of purchase of the product in the form of a bill of sale or receipted invoice. A list of authorized service representatives is available from Electro-Voice Service at 600 Cecil Street, Buchanan, MI 49107 (800/234-6831 or FAX 616/695-4743). **Incidental and Consequential Damages Excluded:** Product repair or replacement and return to the customer are the only remedies provided to the customer. Electro-

Voice shall not be liable for any incidental or consequential damages including, without limitation, injury to persons or property or loss of use. Some states do not allow the exclusion or limitation of incidental or consequential damages so the above limitation or exclusion may not apply to you. **Other Rights:** This warranty gives you specific legal rights, and you may also have other rights which vary from state to state.

Electro-Voice Speakers and Speaker Systems are guaranteed against malfunction due to defects in materials or workmanship for a period of five (5) years from the date of original purchase. The Limited Warranty does not apply to burned voice coils or malfunctions such as cone and/or coil damage resulting from improperly designed enclosures. Electro-Voice active electronics associated with the speaker systems are guaranteed for three (3) years from the date of original purchase. Additional details are included in the Uniform Limited Warranty statement.

Electro-Voice Accessories are guaranteed against malfunction due to defects in materials or workmanship for a period of one (1) year from the date of original purchase. Additional details are included in the Uniform Limited Warranty statement.

Electro-Voice Flying Hardware (including enclosure-mounted hardware and riggings accessories) is guaranteed against malfunction due to defects in materials or workmanship for a period of one (1) year from the date of original purchase. Additional details are included in the Uniform Limited Warranty statement.

For warranty repair or service information, contact the service repair department at: 616/695-6831 or 800/685-2606.

For technical assistance, contact Technical Support at 800/234-6831 or 616/695-6831, M-F, 8:00 a.m. to 5:00 p.m. Eastern Standard Time.


Specifications subject to change without notice.

Xcn Two-Way MB/HF System

Figure 1 — Polar Response

The directional response of the Xcn was measured in an anechoic environment at a distance of 6.1 m (20 ft.) using 1/3-octave-filtered pink noise with a full spherical measurement system. The Klark Teknik DN8000 digital electronic unit was used to provide the necessary crossover filters, equalization and time delay. The polar response of the loud-speaker system at selected 1/3-octave frequencies is shown. The selected frequencies are representative of the polar response of the system.













--- Vertical
 — Horizontal
 5 dB per division

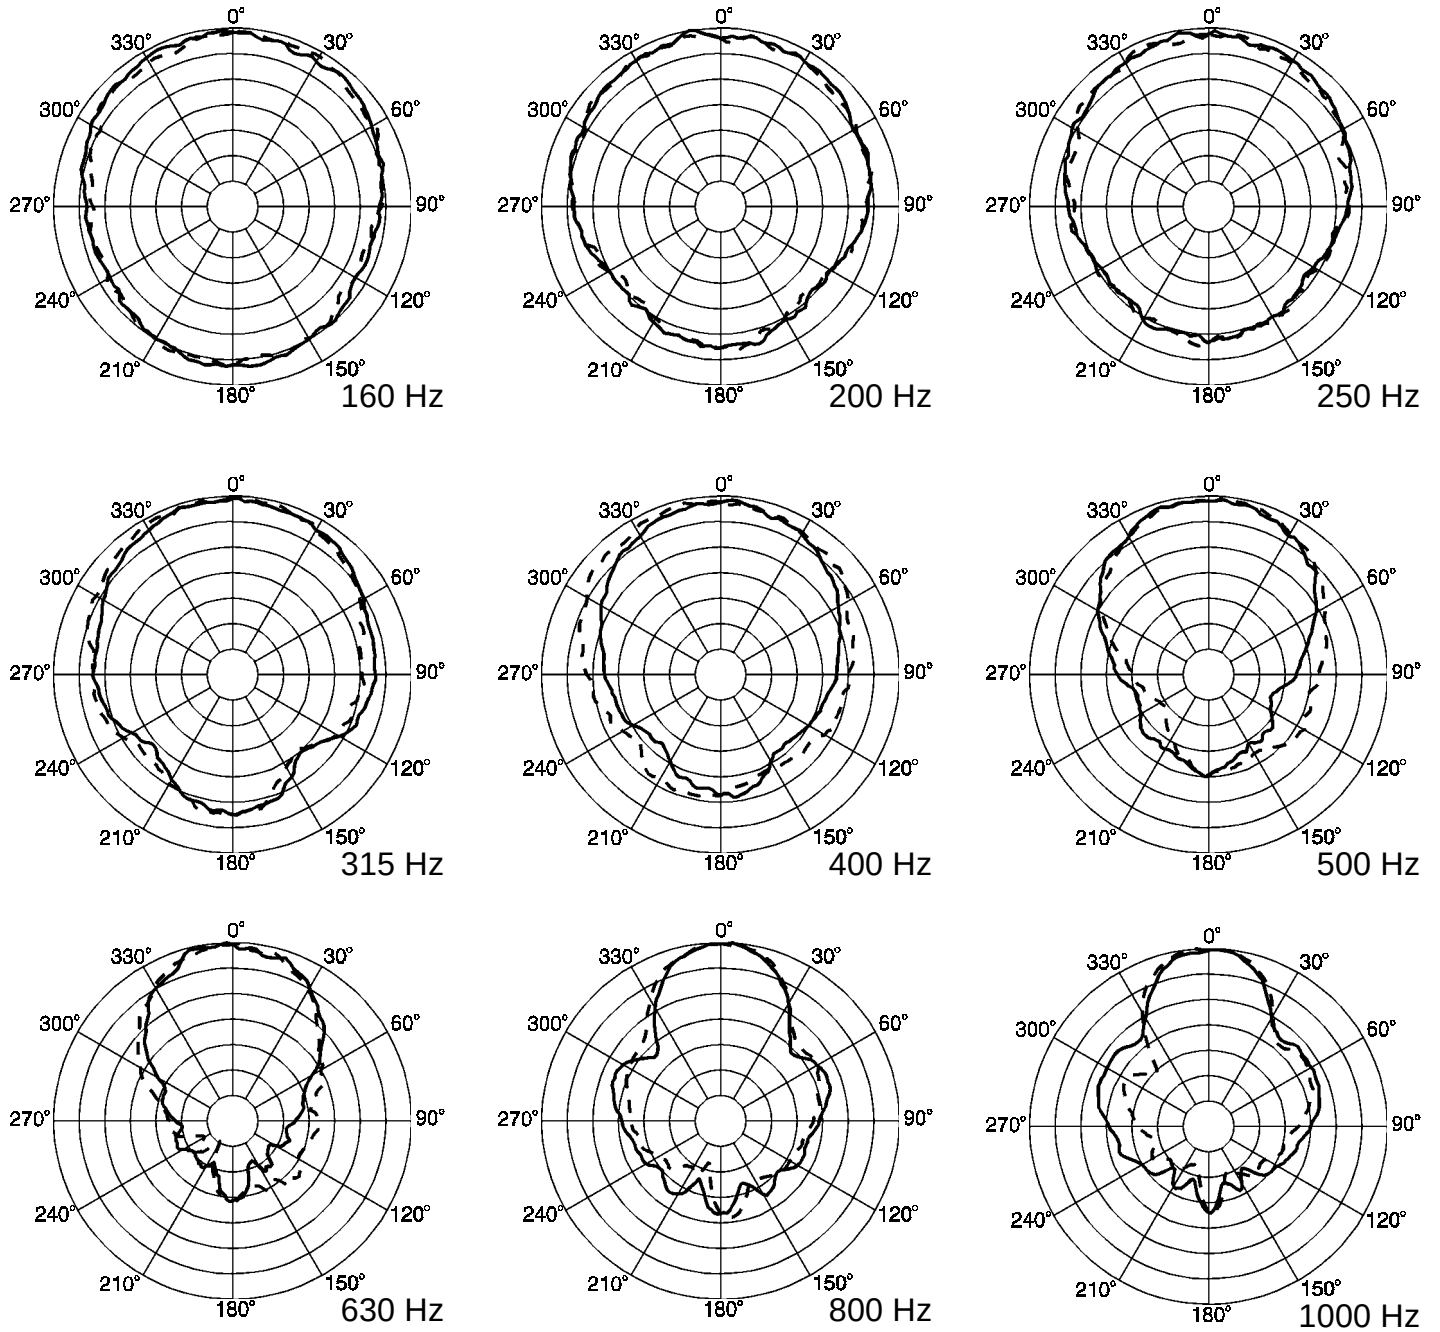

Xcn Two-Way MB/HF System

--- Vertical
 — Horizontal
 5 dB per division

Xcn Two-Way MB/HF System

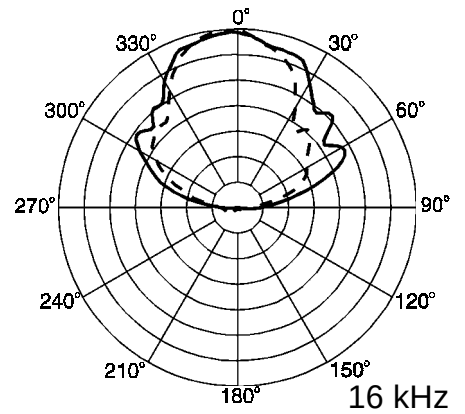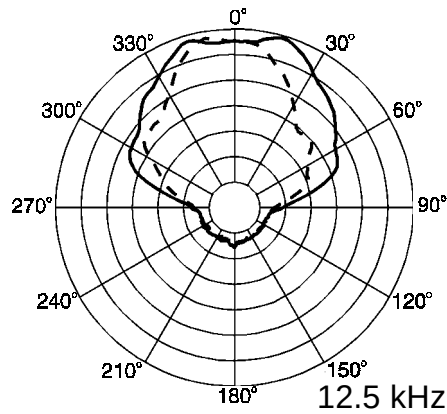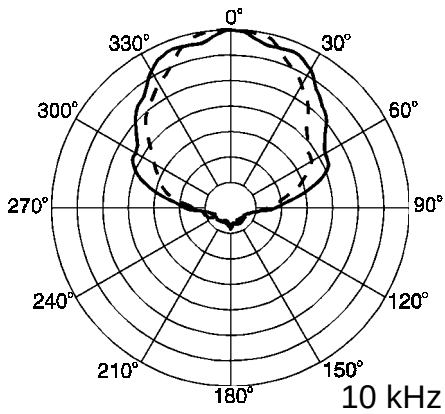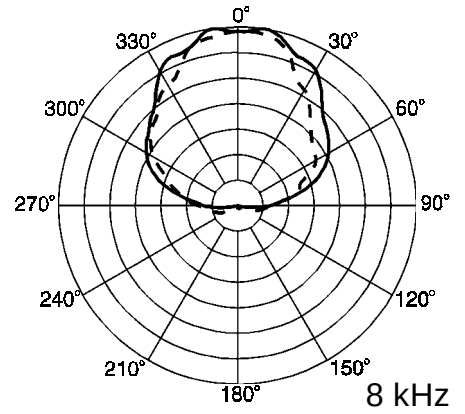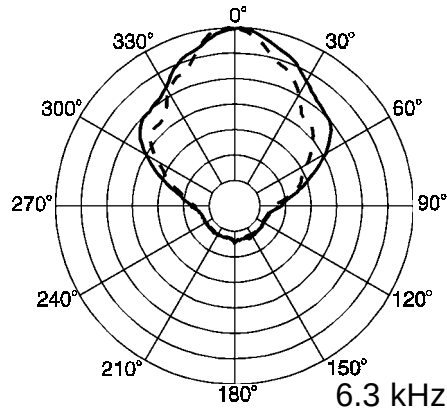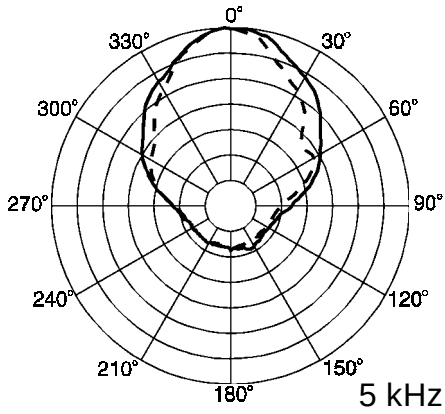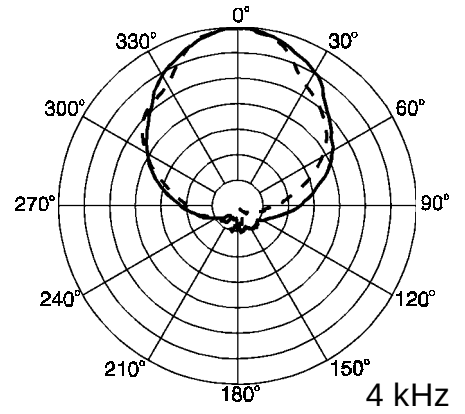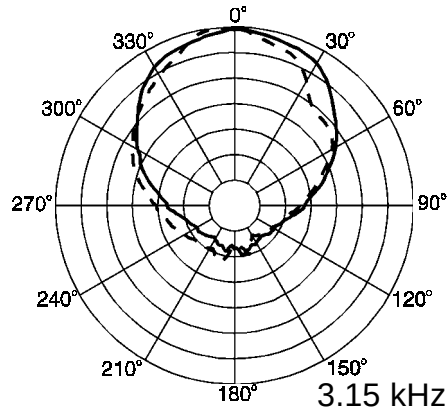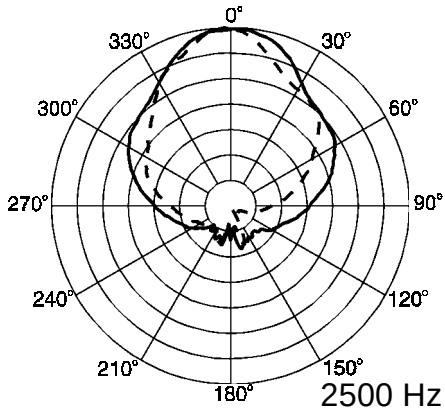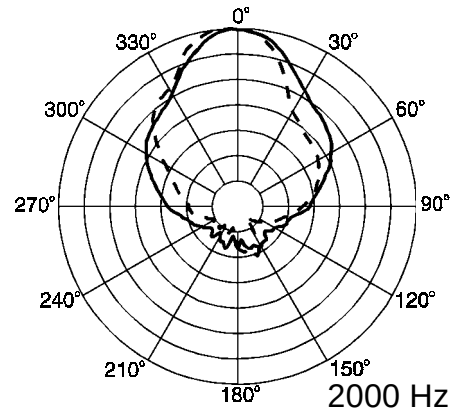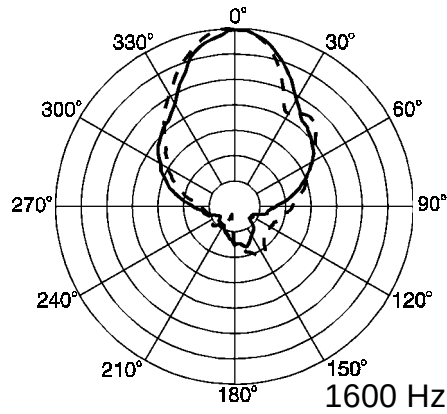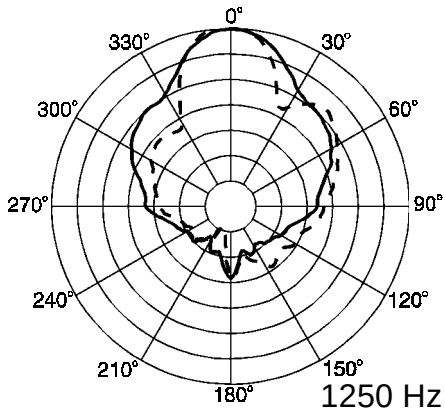

Xcn Two-Way MB/HF System

Figure 2 — Frequency Response

The frequency response of the Xcn was measured on axis in the far field in an anechoic environment using a swept sine-wave signal. The Klark Teknik DN8000 digital electronic unit was used to provide the necessary crossover filters, equalization and time delay. One watt of power (4.00-volts rms at 500 Hz) was applied to the mid band of the mid-bass section. The sound-pressure level was normalized for an equivalent one meter distance.


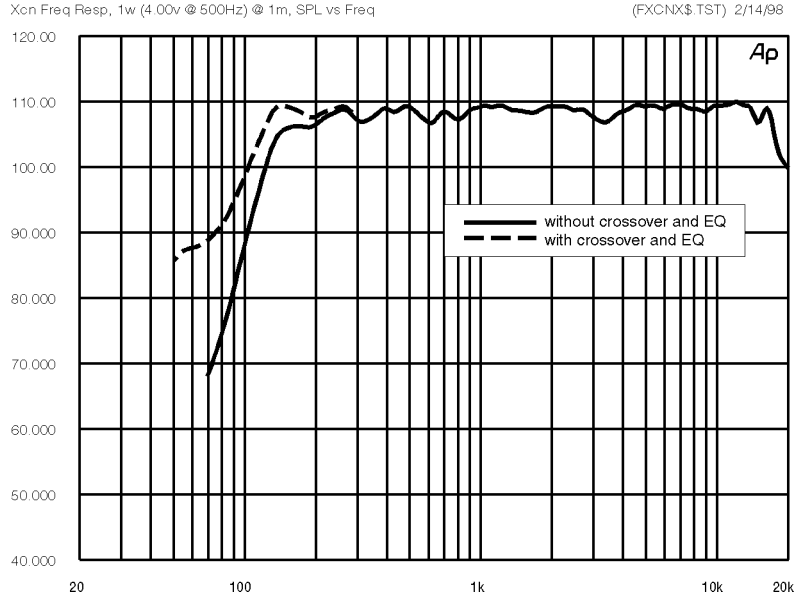


Figure 3 — Beamwidth

The beamwidth of the Xcn, (i.e., the included horizontal and vertical coverage angles at the -6-dB points) was measured with a full-spherical measurement system as described in Figure 1.

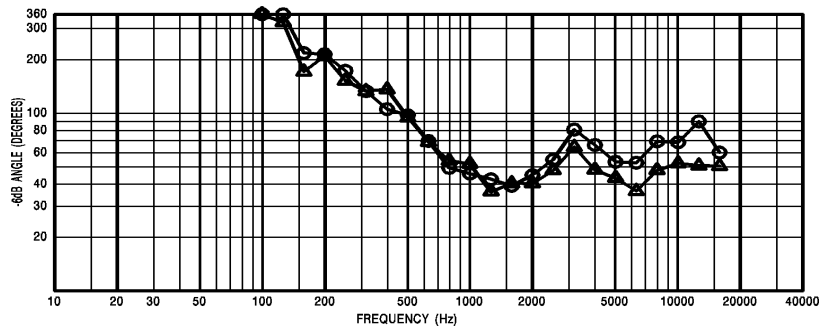

Xcn Two-Way MB/HF System

Figure 4 — Directivity

The directivity index, D_i , and directivity factor, R , of the Xcn were measured with a full-spherical measurement system as described in Figure 1.

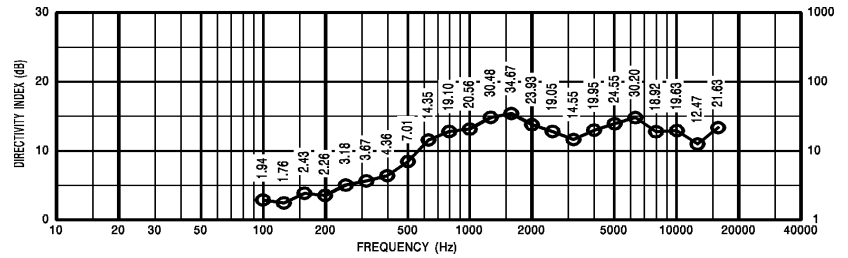


Figure 5 — Distortion

Distortion for the Xcn was measured on axis in the far field in an anechoic environment with an input signal that would result in a sound-pressure level of 115 dB at one meter. The Klark Teknik DN8000 digital electronic unit was used to provide the necessary crossover filters, equalization and time delay. A frequency spectrum typical of close-miked rock music was employed. The sound pressure level was normalized for an equivalent one-meter distance. Plots of second and third harmonic distortion are shown referenced to the fundamental.


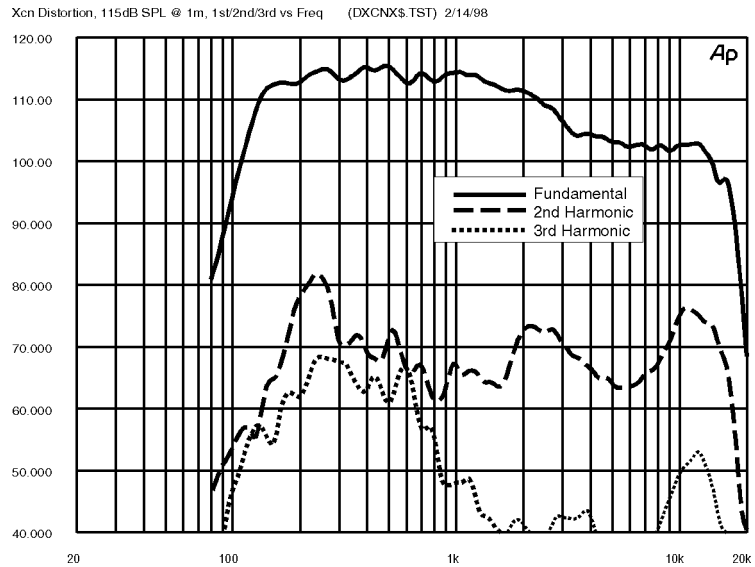


Figure 6 — Impedance

The impedance of each frequency band of the Xcn was measured in an anechoic environment.

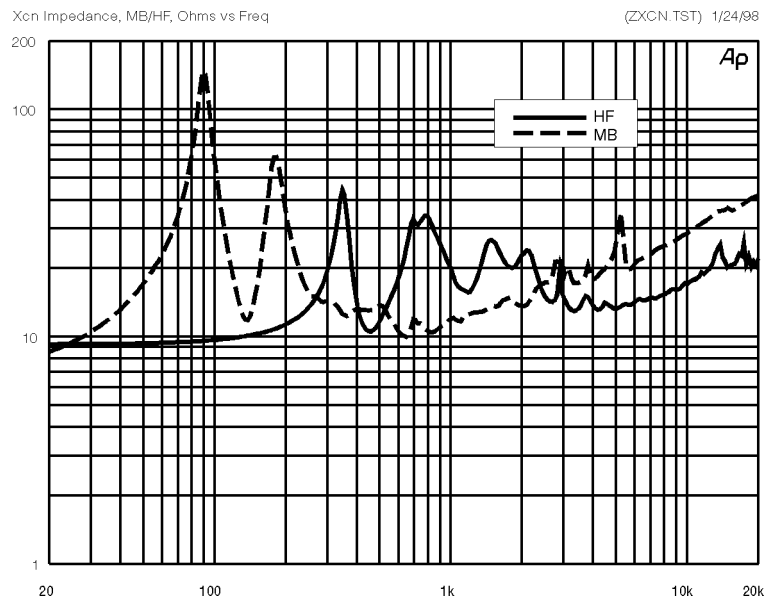

Xcn Two-Way MB/HF System

Figure 7—Wiring Diagram

The wiring diagram of each frequency band of the Xcn is shown.


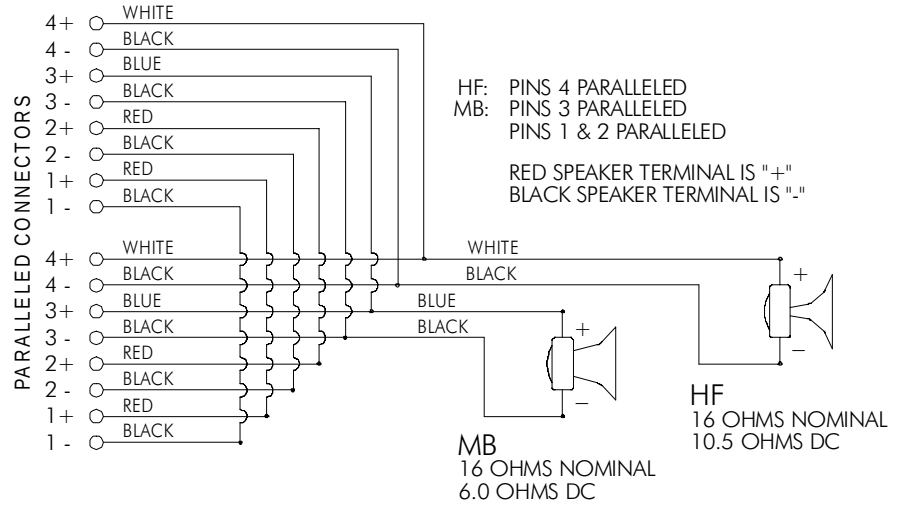


Figure 8—Dimensions

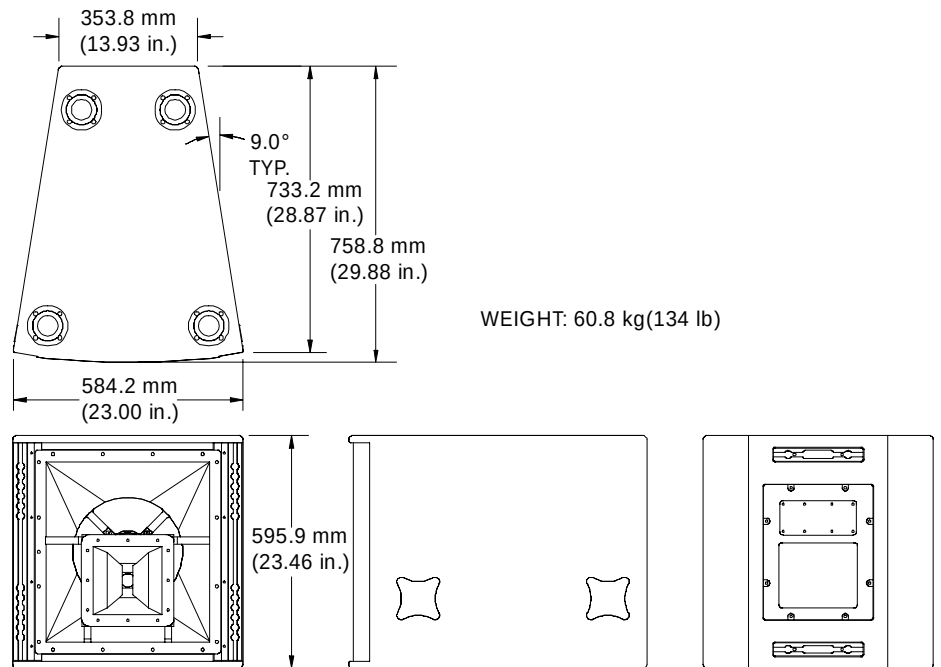

Xcn Two-Way MB/HF System

Specifications

Frequency Response (measured in far field, calculated to one meter on axis, swept sine wave, one watt into MB section—4.00 V at 500 Hz, anechoic environment; see Figure 2):

125-20,000 Hz

Crossover Frequency:

125/1,760 Hz

Efficiency, Mid Band MB/HF:

25/25 %

Maximum Long-Term-Average Power-Handling Capacity (per ANSI/EIA RS-426A 1980), MB/HF:

300/75 watts

Maximum Long-Term Average

Mid-Band Acoustic Output, MB/HF:

75/19 acoustic watts

Sensitivity (SPL at one meter, indicated input power, anechoic environment, average level), MB/HF,

1/1 watt:

110.0/112.0 dB

300/60 watts:

134.8/130.8 dB

Beamwidth (angle included by 6-dB-down points on polar responses, indicated one-third-octave bands of pink noise; see Figures 1 and 3),

Horizontal, 800-16,000 Hz:

60° (+30°, -18°)

Vertical, 800-16,000 Hz:

40° (+24°, -4°)

Directivity Factor, R (Q), 800-16,000 Hz Average (see Figure 4):

22.1 (+12.5, -7.6)

Directivity Index, D_p, 800-16,000 Hz Average (see Figure 4):

13.4 dB (+2.0 dB, -1.8 dB)

Distortion (115 dB SPL at one meter, shaped spectrum; see Figure 5),

Second Harmonic,

200 Hz:

1.9%

500 Hz:

0.7%

2,000 Hz:

1.2%

5,000 Hz:

1.1%

Third Harmonic,

200 Hz:

0.3%

500 Hz:

0.2%

2,000 Hz:

< 0.1%

5,000 Hz:

< 0.1%

Transducer Complement,

HF:

ND5-16 compression driver,
HP-type 60° x 40° horn

MB:

ND12A 12-in. mid-bass driver,
60° x 40° horn

Impedance (see Figure 6),

Nominal, MB/HF:

16/16 ohms

Minimum, MB.HF:

9.9/12.9 ohms

Input Connections:

Two Neutrik NL8MPR Speakon® connectors paralleled

Recommended Amplifier Power, Rating:

HF:

800 watts per channel @ 8 ohms
(93-volts rms short term)

MB:

800 watts per channel @ 8 ohms
(93-volts rms short term)

Enclosure Construction,

Enclosure Shell:

18-mm, 13-ply birch plywood

Finish:

Black textured paint

Grille:

Powder-coated steel with foam

Rigging:

Proprietary hinge system at rear. Heavy-duty L-track on front which accepts New Haven NH32102-2 double-stud fittings

Dimensions,

Height:

595.9 mm (23.46 in.)

Width (front):

584.2 mm (23.00 in.)

Width (back):

353.8 mm (13.93 in.)

Depth:

758.8 mm (29.88 in.)

Angle:

18° wedge

Net Weight:

60.8 kg (134 lb)

Shipping Weight:

64.9 kg (143 lb)

Xcn Two-Way MB/HF System

Xcn Two-Way MB/HF System

Electro-Voice®

600 Cecil Street, Buchanan, MI 49107

616/695-6831, 616/695-1304 Fax

©Telex Communications, Inc., 1999 • Litho in U.S.A.

SPEAKERS—X-Array™

Part Number 534834 Rev.B—9934