




CONDITIONED POWER DISTRIBUTION 20 AMP PRO SERIES MODELS

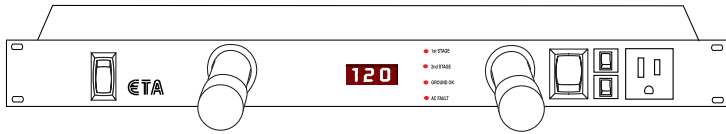

PD11LVP

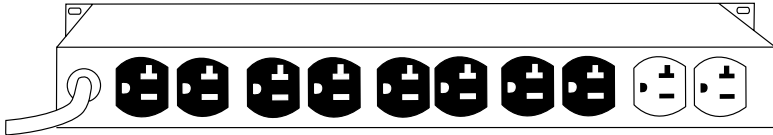

BACK
PANEL



PD11LP



PD11VP




PD11P

Why You Need Conditioned Power:

With present demands on power utilities, voltage spikes, power surges, electrical noise, and power failures are commonplace. This "garbage" in the power delivered can reduce the fidelity of audio systems, cause premature failure, or result in extensive damage or destruction of electronic equipment.

PROTECT YOUR INVESTMENT with ETA Systems Conditioned Power units featuring EMI/RFI filtration, spike/surge/sag/ protection, voltage regulation, and sequential, timed power turn-on.

Easy 4-step bulb replacement




- Use a 120 volt 4 watt bulb (Christmas tree bulb)
1. Twist cap clockwise
 2. Release bulb & socket
 3. Replace bulb
 4. Replace socket, turn cap counter-clockwise

ETA QUALITY STANDARD FEATURES:

- Incoming power spike and surge protection & noise filtration on all legs of incoming power
- One rack space high
- Three year limited warranty
- ETL listed

PRO SERIES SPECIFICATIONS: PD11LVP, PD11LP, PD11VP, PD11P

Dimensions	19" L x 10" D x 1 ³ / ₄ " H
Weight	10 lbs.
Housing Quality	Black powder coated chassis, black anodized aluminum front panel
Electrical	120V, 50/60 Hz, single phase
Max. amps	20/unit
Max. watts	2400/unit
Max. front outlet	15 amps
Spike/surge protection	Line to neutral, neutral to ground, line to ground
Clamping level	200V peak
Response time	1 nanosecond
Max. surge voltage	6000V
Max. surge current	23,000 amps
Max. spike energy	630 joules total
Noise attenuation	Transverse > 20 dB, 1.5 kHz to 200 mHz
Certification	ETL listed 

PD11P & ALL PRO SERIES FEATURES:

- Four dual 20 amp U-grounded outlets
- One "always on" dual 20 amp U-grounded outlet
- Full 120 volt, 20 amp, 2400 watt capacity per unit
- Requires 20 amp circuit and receptacle
- Protected "always on" 15 amp AC power outlet on the front panel
- 12-gauge, 3-prong, 10-foot power cord, 20-amp capacity
- Total unit 20 amp and 15 amp outlet circuit breakers located on front panel
- Three-stage spike and surge protection
- Two-stage EMI/RFI filtration
- Ground and AC line fault check

PD11VP SPECIAL FEATURES:

- Plus a digital voltmeter readout

PD11LP SPECIAL FEATURES:

- Plus dual swivel rack high output illuminators with HIGH/LOW settings and easy bulb change accessibility

PD11LVP SPECIAL FEATURES:

- Plus a digital voltmeter readout
- Plus dual swivel rack high output illuminators with HIGH/LOW settings and easy bulb change accessibility

Power cord
requires
20 amp
receptacle



 **ETA** SYSTEMS

All designs and specifications are subject to change without notice.

5FP-064-LIT 5/01

The Power Just Keeps On Coming

1532 Enterprise Pkwy, Twinsburg, Ohio 44087 USA • 800-321-6699 • Fax: 330-425-9700 • www.etasys.com