




# CONDITIONED POWER DISTRIBUTION 15 AMP SERIES

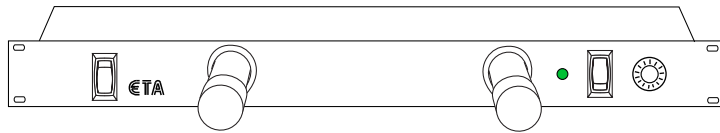

PD8L



PD8

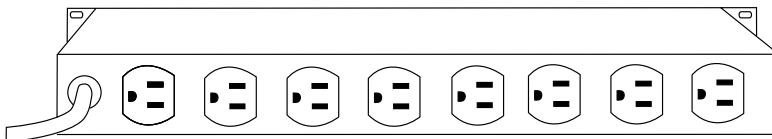

BACK  
PD8/8L

## PD8 and PD8L FEATURES:

- Watchdog protected circuitry with front panel L.E.D. indicator noting "Go" or "No Go" protection status. When the green L.E.D. is lit, protection is on.
- Surge protection alarm
- Full 120 volt, 15 amp, 1800 watt output
- 8 protected U-grounded power outlets on rear panel
- 14-gauge 3-prong 10' power cord
- 15 amp input - breaker protected
- Spike and surge protection
- EMI/RFI filtration
- Touring quality construction

## PD8L SPECIAL FEATURES:

- High output, dual swivel rack illuminators on with High/Low settings and "easy change" bulb replacement

### Why You Need Conditioned Power:


With present demands on power utilities, voltage spikes, power surges, electrical noise, and power failures are commonplace. This "garbage" in the power delivered can reduce the fidelity of audio systems, cause premature failure, or result in extensive damage or destruction of electronic equipment.

PROTECT YOUR INVESTMENT with ETA Systems Conditioned Power units featuring EMI/RFI filtration, spike/surge/sag/ protection, voltage regulation, and sequential, timed power turn-on.

## ETA QUALITY STANDARD FEATURES:

- Incoming power spike and surge protection & noise filtration on all 3 legs of incoming power
- One rack space high
- Three year limited warranty
- UL 1449 listed


### Easy 4-step bulb replacement




Use a 120 volt 4 watt bulb (Christmas tree bulb)

1. Twist cap clockwise
2. Release bulb & socket
3. Replace bulb
4. Replace socket, turn cap counter-clockwise

### PD8/8L SPECIFICATIONS:

Dimensions	19" L x 8" D x 1 3/4" H
Weight	7 lbs. (less packaging)
Housing Quality	Black powder coated chassis
Electrical	120V, 50/60 Hz, single phase
Max. amps	15/unit
Max. watts	1800/unit
Spike/surge protection	Line to neutral, neutral to ground, line to ground
Surge protection alarm	yes
Response time	< 1 nanosecond
Max. clamping voltage	330V
Max. spike current	65,000 amps
Max. surge energy	1665 joules total (555 per leg)
Noise filter (EMI/RFI)	Frequency 150 kHz -100 MHz Attenuation up to 68 dB
Certification	UL 1449 Listed 



ETA<sup>®</sup> SYSTEMS

All designs and specifications are subject to change without notice.

5HOU-003-LIT 5/01

*The Power Just Keeps On Coming*

1532 Enterprise Pkwy, Twinsburg, Ohio 44087 USA • 800-321-6699 • Fax: 330-425-9700 • www.etasys.com