





**VS84**  
 8x4 AV Matrix Switcher



# ANMAV VS84

▶▶ **AT A GLANCE**


- 8 composite/S video, stereo RCA inputs
- 4 composite/S video, stereo RCA outputs
- Compact 1 RU size
- Front Panel LED indication
- Infra-red remote control
- RS232 serial control

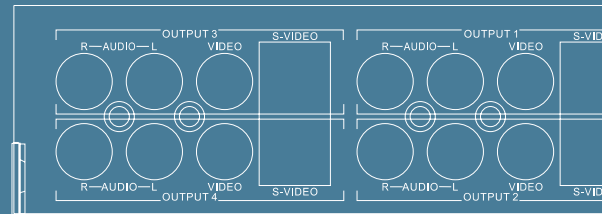

▶▶ **A MORE THOROUGH EXAMINATION**

The ANMAV VS84 audio visual matrix switcher is a cost effective, yet high quality AV source matrix switcher designed for the highly demanding commercial audio visual market. Featuring 8 composite/S video, stereo RCA audio inputs which can be routed to any 4 composite/S video and stereo RCA audio outputs, this compact 1 RU AV matrix switcher has front panel control with LED indication. Alternatively, sources can be routed via the supplied infra-red remote control or via RS232 serial control. The ANMAV VS84 provides comprehensive audio visual switching in an elegant slim line package, with the flexibility and features demanded in a quality audio visual product.



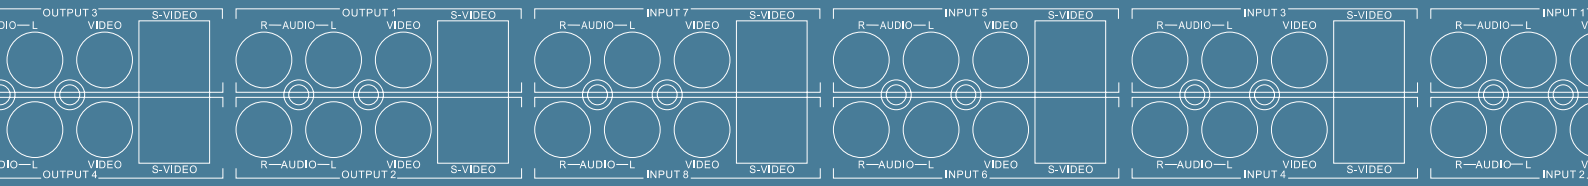

# AMAV VS84

## ARCHITECTURAL SPECIFICATION

The AV matrix switcher shall be of compact design and feature 8 composite/S video, stereo RCA audio inputs and 4 composite/S video, stereo RCA audio outputs. The unit shall have LED indication of source selected on the front panel and be operable via the front panel, via infra-red remote control or via RS232 serial control. The unit shall be an Australian Monitor AMAV VS84.

## SPECIFICATIONS

VIDEO INPUTS	8 x S-video (4 way Mini-DIN connectors) and 8 x composite video (RCA connectors), 750hm
AUDIO INPUTS	8 x Stereo line level audio, 47kOhm, dual RCA connectors
VIDEO OUTPUTS	4 x S-video (4 way Mini-DIN connectors) and 4 x composite video (RCA connectors), 750hm
AUDIO OUTPUTS	4 x Stereo line level audio, 47kOhm, dual RCA connectors
VIDEO BANDWIDTH	>150MHz
VIDEO CROSSTALK	>60dB
AUDIO CROSSTALK	>60dB
AUDIO SNR	>77dB
AUDIO THD+N	<0.02%
CONTROL	Front Panel, IR Remote, RS232
RS232 CONTROL	9600 Baud, No Parity, 8 data bits, 1 stop bit
POWER	+12V DC, centre +ve, outer -ve, 1.2A Max
DIMENSIONS (H X W X D)	44mm x 440mm x 200mm
SHIPPING DIMENSIONS (H X W X D)	98mm x 510mm x 283mm
SHIPPING WEIGHT	3.5 kg

## ENGINEERED AND DISTRIBUTED BY AUDIO TELEX COMMUNICATIONS PTY LTD ABN 78 001 345 482

149 Beaconsfield Street, Silverwater, Sydney, NSW, 2128 Australia  
 NSW Tel: (02) 9647 1411 Fax: (02) 9648 3698 VIC Tel: (03) 9890 7477 Fax: (03) 9890 7977  
 QLD Tel: (07) 3852 1312 Fax: (07) 32521237 WA Tel: (08) 9228 4222 Fax: (08) 9228 4233  
 SA Tel: (08) 8352 4444 Fax: (08) 8352 4488 NZ Tel: (09) 4159426 Fax: (09) 415 9864  
 Export enquiries: international@audiotelex.com.au Website: www.australianmonitor.com.au

