

Features:

- Two-way passive speaker with one 10" woofer and one 1.5" driver
- Highly durable poly propylene injection molded cabinet.
- Voice coil in the 10" woofer is made from \varnothing 75mm copper cladding aluminium ribbon wire.
- Heavy duty protective grille.
- High frequency driver protection.
- Rotatable 90°x 60°(HxV) dispersion horn for horizontal or vertical mounting.
- Pole mount or eye bolt installation points.



Model: XR10

Technical Specifications

System:	Two Way Full Range Speaker With Built-in Crossover	
Drivers:	10" x 1	1x \varnothing 34mm Driver
Frequency Response(-3dB):	55Hz-18KHz	
Frequency Response(-10dB):	50Hz-20KHz	
Sensitivity(dB/1M/1W):	95 dB	
Impedance:	8 Ohm	
Recommendatory Power(RMS/W):	250 W	
Max Sound Level(dB/1M):	119dB	
Dispersion(HxV) Rotatable:	90°x60°	
Harmonic Distortion:	≤ 1%	
Connectors:	2xNL4	
Dimensions(WxDxH mm/pcs):	321X321X464mm	
Packing Dimensions(WxDxH mm/pcs)	375X355X535mm	
Net Weight(Kg/pcs):	10Kg	
Gross Weight(Kg/pcs):	12.0Kg	

www.audiotellex.com.au

Distributed by Audio Telex Communications Pty Ltd

SYDNEY (NSW & ACT SALES)

Phone: (02) 9647 1411

Email: nsw@audiotellex.com.au

MELBOURNE (VIC & TAS SALES)

Phone: (03) 9890 7477

Email: vic@audiotellex.com.au

BRISBANE (QLD SALES)

Phone: (07) 3852 1312

Email: qld@audiotellex.com.au

ADELAIDE (SA & NT SALES)

Phone: (08) 8352 4444

Email: sa@audiotellex.com.au

PERTH (WA SALES)


Phone: (08) 9228 4222

Email: wa@audiotellex.com.au


AUCKLAND (NZ SALES)

Phone: (09) 415 9426


Email: audiotlx@nznet.gen.nz

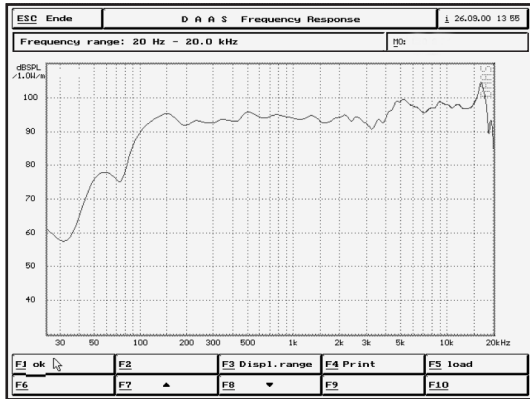


Frequency response, SPL/2.83v

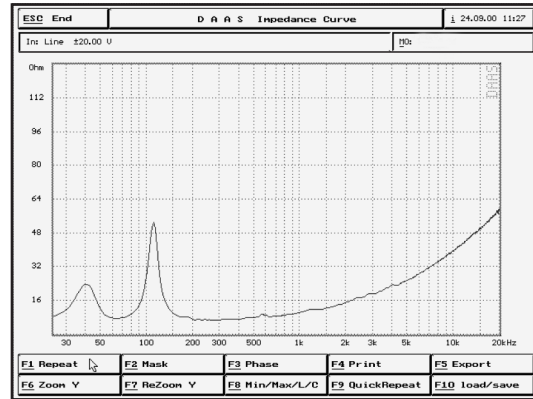



Impedance curve

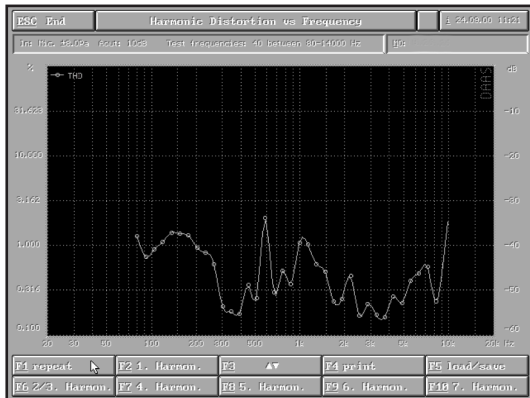


Harmonic distortion 106dB/2.5m, nominal impedance

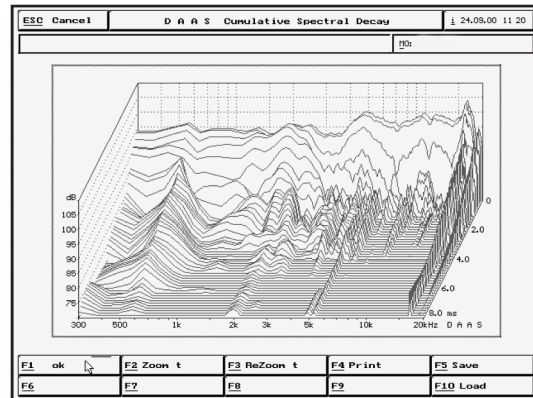

Waterfall spectrum analysis

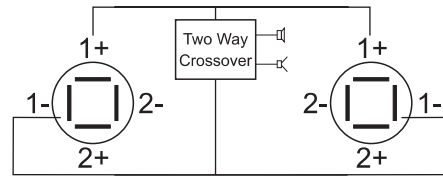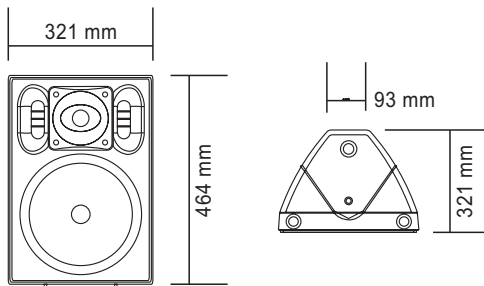

Two Way Crossover

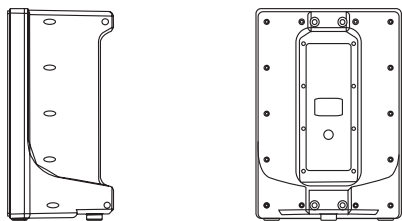

Accessories: XR10

- XR10 CVR Heavy Duty Cover
- AMIS LSB1 Wall Mount Brackets
- ATC 303 Tripod Speaker Stand
- ATC 304 Heavy Duty Tripod Speaker Stand
- ATC 305 Winch Up Speaker Stand