

## Features:

- Two-way passive speaker with one 8" woofer and one 1.5" driver.
- Highly durable poly propylene injection molded cabinet.
- Voice coil in the 8" woofer is made from  $\varnothing$  50mm copper cladding aluminium ribbon wire.
- Heavy duty protective grille.
- High frequency driver protection.
- Supplied in pairs complete with brackets.
- Available in black or white.
- Rotatable 90°x 60° (HxV) dispersion horn for horizontal or vertical mounting.



## Model: XR8

### Technical Specifications

System:	Two Way Full Range Speaker With Built-in Crossover	
Drivers:	8" x1	1x $\varnothing$ 34mm Driver
Frequency Response(-3dB):	65Hz-18KHz	
Frequency Response(-10dB):	60Hz-20KHz	
Sensitivity(dB/1M/1W):	92 dB	
Impedance:	8 Ohm	
Recommendatory Power(RMS/W):	100 W	
Max Sound Level(dB/1M):	111dB	
Dispersion(HxV):	90°x60°	
Harmonic Distortion:	≤ 1%	
Connectors:	1xNL4	
Dimensions(WxDxH mm/pcs):	277X257X400mm	
Packing Dimensions(WxDxH mm/pair)	595X310X460mm	
Net Weight(Kg/pcs):	6.5Kg	
Gross Weight(Kg/pair):	15.0Kg	

[www.audiotellex.com.au](http://www.audiotellex.com.au)

Distributed by Audio Telex Communications Pty Ltd

**SYDNEY (NSW & ACT SALES)**

Phone: (02) 9647 1411

Email: nsw@audiotellex.com.au

**MELBOURNE (VIC & TAS SALES)**

Phone: (03) 9890 7477

Email: vic@audiotellex.com.au

**BRISBANE (QLD SALES)**

Phone: (07) 3852 1312

Email: qld@audiotellex.com.au

**ADELAIDE (SA & NT SALES)**

Phone: (08) 8352 4444

Email: sa@audiotellex.com.au

**PERTH (WA SALES)**


Phone: (08) 9228 4222

Email: wa@audiotellex.com.au


**AUCKLAND (NZ SALES)**

Phone: (09) 415 9426


Email: audiotlx@nznet.gen.nz

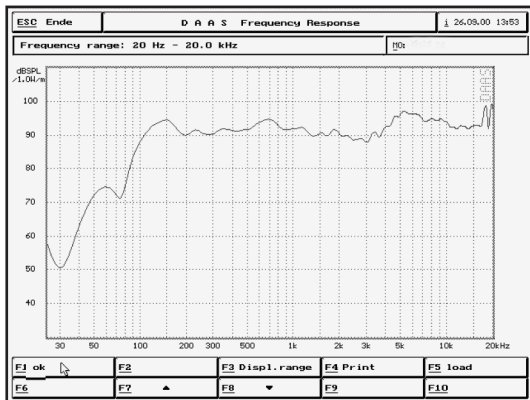


Frequency response, SPL/2.83v

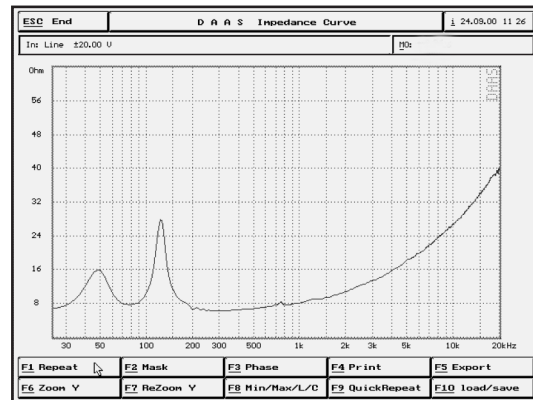



Impedance curve

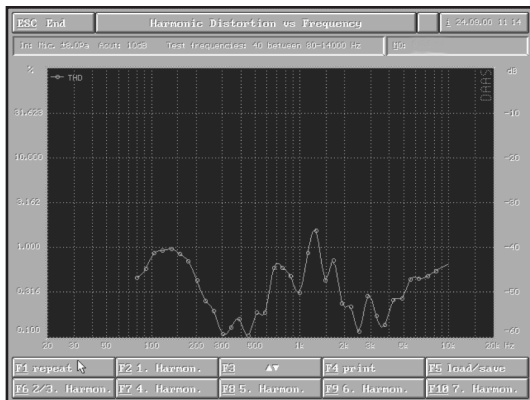


Harmonic distortion 106dB/2.5m, nominal impedance

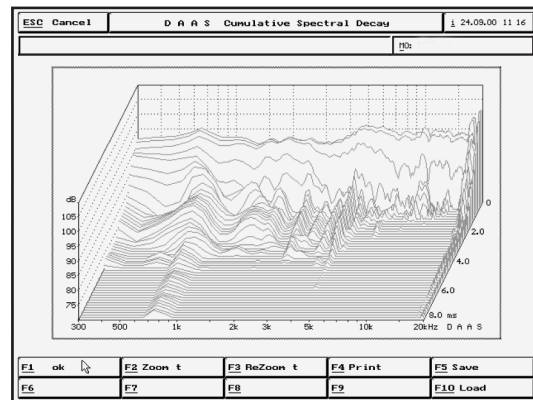

Waterfall spectrum analysis

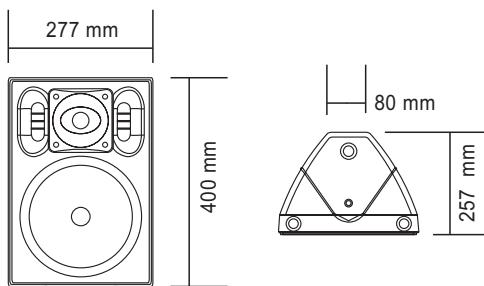

Two Way Crossover

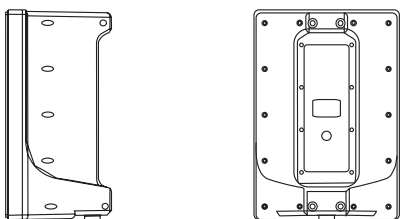

Accessories: **XR8**

- XR8 PMA Pole Mount Adapter
- XR8 UMB Universal Mounting Bracket