


## 902 2 Channel Personal Stereo Audio Amplifier



### FEATURES

- **S/N Ratio** - 68dB (unweighted).
- **Inputs** - 3 stereo on RCA connectors and a single 3.5mm stereo mini-plug.
- **Outputs** - 1/4" Headphone jack and terminal block for speakers.
- **Control** - Volume, bass, mid, treble, balance, and loudness.
- **Compact Size** - Part of the Kramer TOOLS™ family of compact, high quality and cost effective solutions.

The **902** is a high performance integrated personal stereo amplifier for unbalanced stereo signals. It allows selection between four inputs and delivers a speaker output of 4.5 watts RMS power per channel into a 4 ohm load.

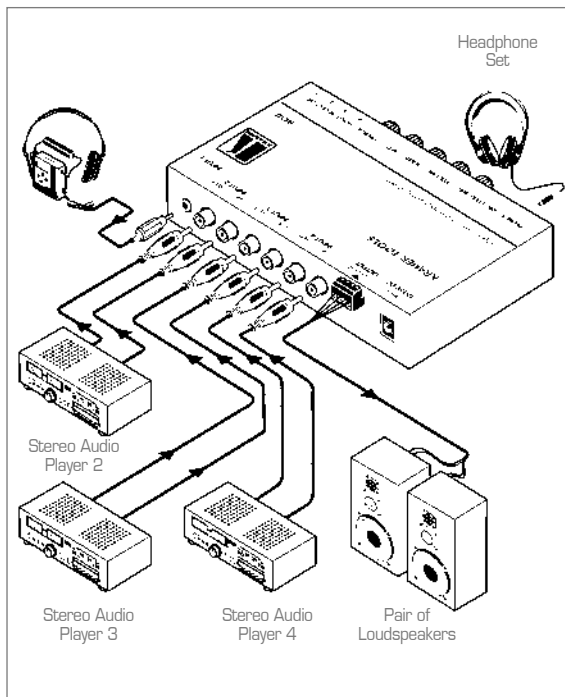

### TECHNICAL SPECIFICATIONS

INPUTS:	1 audio stereo 1Vpp/50kΩ on a 3.5mm mini phone connector, 3 audio stereo 1Vpp/50kΩ on RCA connectors.
OUTPUTS:	Stereo headphone/loudspeaker terminal block, automatic switching when headphone is plugged in.
BANDWIDTH (-3dB):	20kHz.
S/N RATIO:	68dB unweighted.
CONTROL:	Input selector switches, BASS (70Hz.), MID (1kHz), TREBLE (15kHz): +/- 15dB. Volume, balance and loudness controls.
OUTPUT POWER:	4.5W RMS/Channel into 4Ω with 15 Volts supply.
THD+NOISE:	0.059% @ 1kHz, 1Volt.
2nd HARMONIC:	0.025%.
POWER SOURCE:	12 - 15VDC, 22Volts max, up to 1Amp.
WEIGHT:	0.6kg. (1.32lbs.) approx.
ACCESSORIES:	12VDC power supply.

