


# Digital Projector

## PB9200

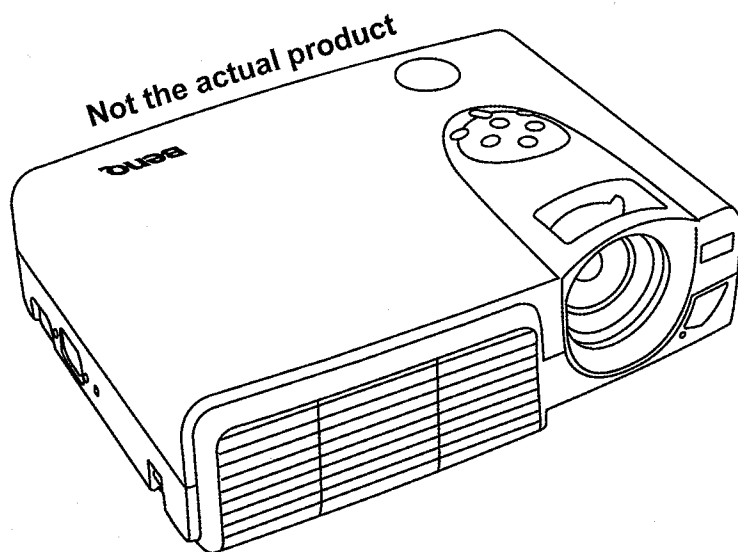

### Key Features

- Native XGA resolution
- 4500 ANSI lumens
- 750:1 contrast ratio
- 70" @ 6.6 feet Wide Angle lens
- 40" to 500" image size
- HDTV Compatible (YPbPr)
- 17 lbs
- 1:1.5 zoom lens


### Specifications

<b>Display Technology</b>	Polysilicon active-matrix TFT LCD	
<b>Panel</b>	0.99" P-Si TFT (with Micro Lens) x 3	
<b>Native Resolution</b>	XGA(1024x768)	
<b>Brightness</b>	4500 ANSI lumens (80% at economic mode)	
<b>Uniformity</b>	85%	
<b>Contrast Ratio</b>	750:1 (Full on/Full off)	
<b>Aspect Ratio</b>	4:3 Native, 16:9 Selectable	
<b>Color</b>	Full 16.7 million color palette	
<b>Lens</b>	Power zoom, F=1.7 to 2.4, f=31~46mm	
<b>Image Size (Diagonal)</b>	40" to 500"	
<b>Throw Ratio</b>	70" @ 6.6 feet	
<b>Zoom Ratio</b>	1.5x	
<b>Lamp</b>	310W UHB	
<b>Lamp Life</b>	1500 hours	
<b>Computer compatibility</b>	UXGA, SXGA, XGA, SVGA, VGA, Macintosh®, HDTV (1080i, 720p, 576p, 480p)	
<b>H-Synch Range</b>	15 ~ 91 kHz	
<b>V-Synch Range</b>	50 ~ 120 Hz	
<b>Video Compatibility</b>	NTSC, PAL, SECAM, EDTV, HDTV (1080i, 720p, 576p, 480p RGBHV)	
<b>Input Sources</b>	PC- Analog RGB D-sub 15 pin x 1 PC - M1-D x 1 A/V - S-Video: Mini DIN 6 pin x 1 A/V - Composite-Video RCA jack x 1 A/V - RCA jack x 3 A/V - BNC (x 5) x 1 Audio - RCA jack x 2 Audio - Stereo mini jack x 1	
<b>Output Sources</b>	PC - Analog RGB D-Sub 15 pin x 1 Audio: Stereo mini jack x 1 Audio Speaker: 1 watt x 2	
<b>Control Sources</b>	RS232: 9 pin D-sub x 1 USB: via M1 terminal Wired remote control: 3.5 dia. Stereo-mini jack x 1 Network: RJ45 x 1	
<b>Dimensions</b>	16.5 x 6.3 x 12.2 Inches (W x H x D)	
<b>Weight</b>	17 lbs	
<b>Power Supply</b>	100 to 240 VAC, 50 to 60 Hz (auto switching)	
<b>Power Consumption</b>	470W (Max.)	
<b>Audible Noise</b>	Normal mode < 40 dB, Economic mode < 36dB	
<b>OSD (On-Screen Display) languages</b>	English/French/German/Italian/Spanish /Korean/Simplified Chinese/Traditional Chinese	
<b>Features</b>	Digital Keystone (+/- 16° Vertical correction) Replaceable lenses Progressive scan Blank	Vertical lens shift Network function PIP HDTV Compatible
<b>Accessories (Standard)</b>	User's Guide Remote Control Batteries RGB Cable	Video cable S-Video Cable M1-D Cable PWR Cord (US, EU, UK)
<b>Accessories (Optional)</b>	Ceiling Mounting Kit, Mac Adapter	

PICTURE BY

DLP

A TEXAS INSTRUMENTS TECHNOLOGY

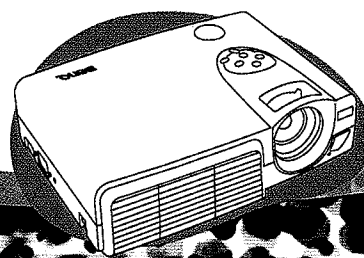

# BenQ

For more information visit [www.BenQ.com](http://www.BenQ.com) or call (866) 700-2367

All product specifications and features are subject to change. © 2004 BenQ America Corp.