

5x1 Dual Wideband Switcher



55

The KRAMER **55** is a high quality, state-of-the art *Dual Wideband Signal Switcher* for use with any set of dual signals - such as stereo-audio, Y/C, SDI, etc. The machine can switch one of 5 dual sources to one dual acceptor, or vice-versa: one dual source to one of 5 dual acceptors.

The KRAMER **55** can be used in studios, shops and showrooms and as an input multiplier for other audio or video switchers. The **55** may be triggered externally using another machine in the 55 series, and several machines - video, Y/C, Audio or Wideband may be controlled by any other of the group using the *LINK* connector. The **55** uses an external 12V DC power source, and is therefore suitable also for field work.

Some features and applications:

- ❖ Video, Y/C, Audio or Component production studios.
- ❖ Video and Audio showrooms, shops and CCTV applications.

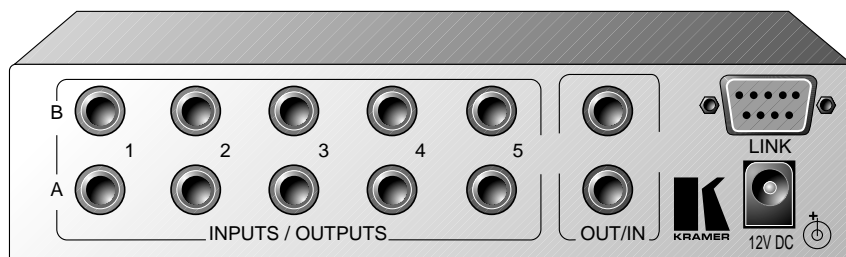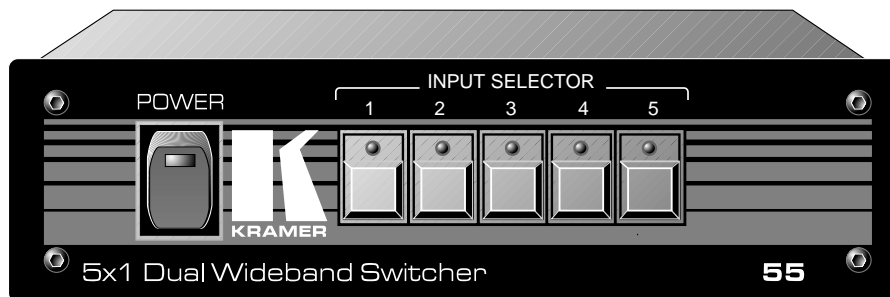

Technical Specifications:

INPUTS:	5 Dual signals / 1 Dual signal on RCA type connectors.
OUTPUT:	1 Dual signal / 5 Dual signals on RCA type connectors.
BANDWIDTH:	270MHz. -3dB.
SWITCHING TIME:	3 ms Nom.
MAX. OUTPUT:	Up to 60 Volts.
CROSSTALK:	-50dB @ 5MHz.
POWER SOURCE:	12VDC 100mA.
DIMENSIONS:	16.5cm X 12cm X 4.5cm (W, D, H.)