

## **ATTENTION**

**Please replace the input card (HSRA-11) of your HSR-1 by following the procedures shown on the next pages.**

**DO NOT THROW THE HSRA-11 BOX AWAY.**

**PUT THE OLD HSRA-11 BOARD INTO THE BOX SO IT WILL BE PROTECTED DURING SHIPMENT.**

**SHIP THE 'OLD' BOARD BACK TO ALLEN AS SOON AS YOU REPLACE THE BOARD. SEND BACK TO THE FOLLOWING ADDRESS:**

**Allen Chan  
Sony Electronics Inc.  
1 Sony Drive, MD 3F8  
Park Ridge, NJ 07656  
TEL. 201-358-4924**

### 3-3. REMOVAL AND ATTACHMENT OF THE CABINETS


#### 3-3-1. Top Panel

##### Removal

1. Remove the four screws. (encircled)
2. Slide the top panel in the direction of **A** as shown by the arrow.
3. Remove the top panel.

##### Attachment

1. Attach the top panel by reversing the removal procedure from step 3 to 1.  
**Note :** Insert claws of the top panel in between the front panel and front frame.

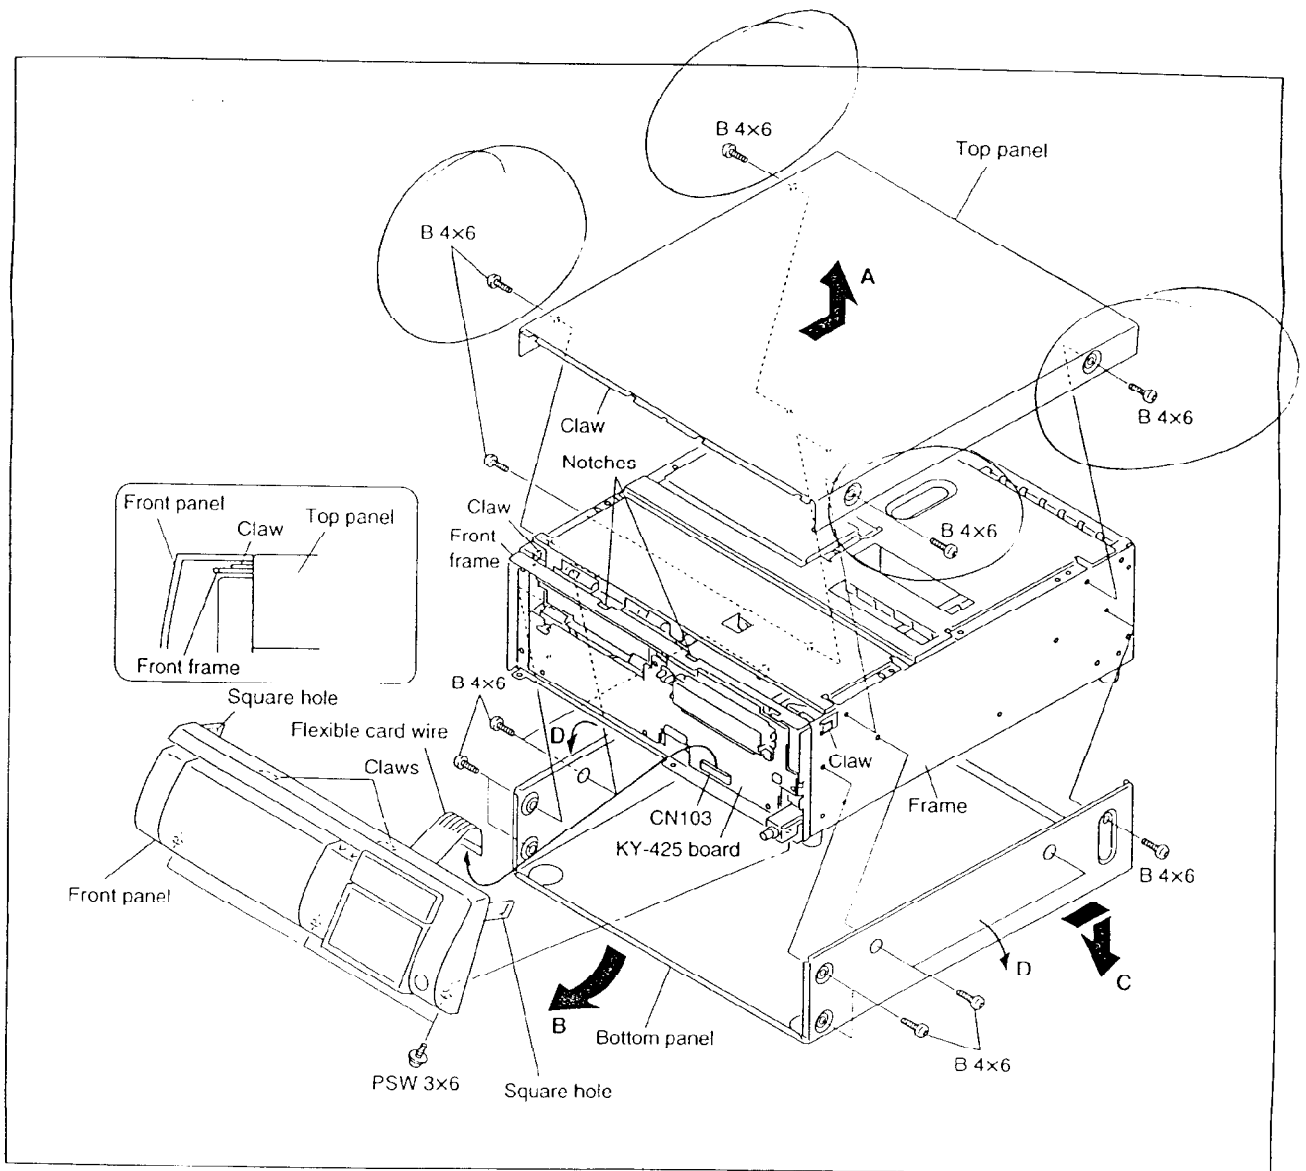


## 3-4. REPLACING THE MAIN PARTS

### 3-4-1. ~~Switching Regulator~~

~~Note : After turning off the main power, wait five minutes or more before starting to remove the switching regulator. There is a danger of electric shock if the switching regulator is removed immediately after turning off the main power.~~

#### Removal

1. Remove the top panel. (Refer to section 3-3-1.)
2. Remove the seven screws and remove the U-stay (F) assembly.

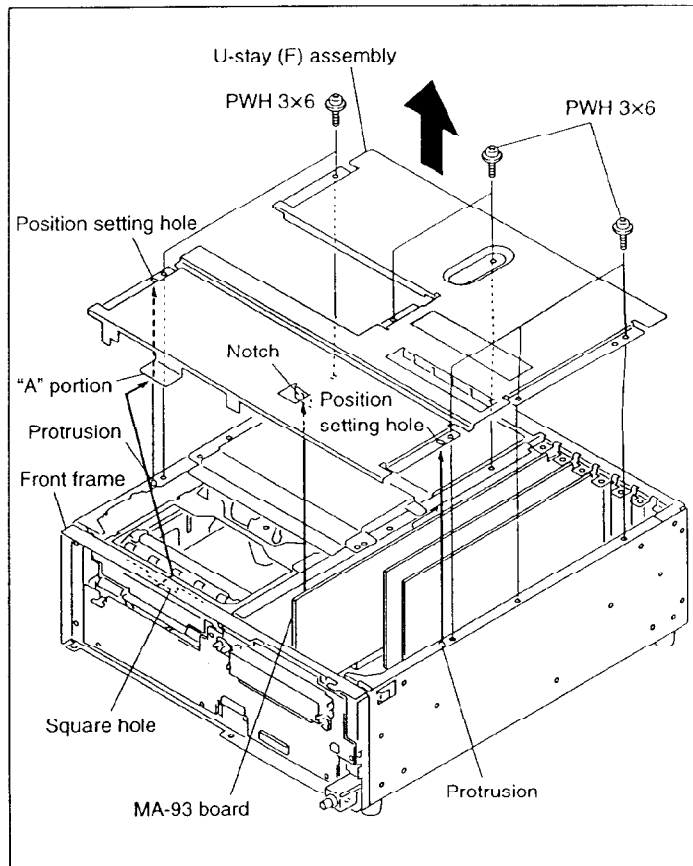

### 3-5. REMOVAL AND ATTACHMENT OF THE CIRCUIT BOARDS

#### 3-5-1. Plug-in Boards

##### Removal

1. Remove the top panel. (Refer to section 3-3-1.)
2. Remove the U-stay (F) assembly. (Refer to section 3-4-1, Removal procedure step 2.)
3. Remove the two screws.
4. Pull the circuit board while it is facing up and remove it.

**Note :** Be careful not to hold the top of the circuit board to pull and remove it.

##### Attachment

1. Align the connector with the square hole of the rear panel.  
(Applicable to AD-152 board and DA-133 board only.)
2. Align the "A" portion of the board with "B" portion of the rear panel.
3. Insert the board until it is firmly inserted into the MB-801 board connector.
4. Attach the boards by reversing the removal procedure from step 3 to 1.

**Note :** Be careful not to hold the top of the circuit board to pull and remove it.

