

371 SPL Computer



During their many years in the field, Symetrix SPL computers have assured sound system intelligibility in a multitude of installations around the world. To this family of ambient noise controllers, we now add another processor with extensive functionality, updated processing algorithms, and a budget-conscious price.

Designed for installations featuring foreground or background music and/or paging, the Symetrix 371 utilizes an external microphone to sense changing

ambient noise levels. A pair of analog voltage controlled amplifiers raise or lower the audio level in response to changes in ambient noise within the unit's installation zone.

A simple set of step-through menus displayed on the front panel LCD guides you through setup of the 371. You set the parameters of the acoustic environment and then set the way you want the unit to respond to changes in it. In operation, the 371 tracks environmental noise levels, internal signal levels and all

the control settings. It makes appropriate gain changes whenever it finds measured noise levels that deviate from the stored performance characteristics. Menu adjustments determine how much the gain is changed, and how quickly that change occurs.

Simple calibration, precise performance, and value priced. Backed by our 15-year history of SPL processing innovation, the Symetrix 371 offers a complete and affordable solution for audio level management.


APPLICATIONS

- Restaurants
- Retail Stores
 - Casinos
 - Offices
- Transit Stations
- Hospitals


FEATURES

Uses Microphone for Noise Sensing	The 371 uses an external microphone to measure changes in the ambient noise level. Its sense operation is continuous and in real-time.	Phantom Power	Sense input provides microphone with 15V phantom power. Enable or disable through front panel menu adjustment.
Headphone Monitoring	Monitor the sense signal using a separate front panel headphone output.	AGC Control	Enables or disables auto leveling of input signals.
Sense Signal	Display numeric reading and relative bargraph of the signal appearing at the sense terminals.	Ambient Adjustment	Choose an adjustment ratio of SPL change vs. program level change.
3 Operating Modes	<p>Active—Indicates continuous measurement of the ambient noise level.</p> <p>History—Records and displays the lowest and highest SPL readings from when the unit was last reset.</p> <p>Bypass—Bypasses the gain control of the SPL controller and the AGC.</p>	Gain Controls	<p>Set minimum and maximum limits for SPL gain range between +20 to -30 dB.</p> <p>Adjust gain of sense input and line output through menu selection. Connect an external trim pot to the 371's rear panel to control output gain remotely.</p>
Signal Path	Controls mono or stereo signals through Euroblock connectors.	Averaging Time	Choose integration time of the running average SPL.
Easy Calibration	Perform calibration under typical installation conditions. No waiting for the quietest or noisiest ambient environment.	Ducker Input	Reduces program level and inhibits sense operation for the duration of the signal at this input. Adjust ducker attenuation from 0 to -40 dB through front panel menu.

REAR PANEL

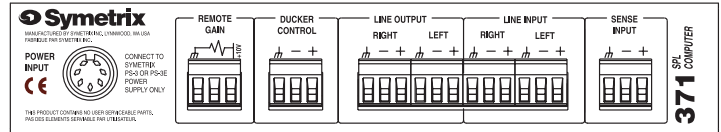

SIGNAL FLOW DIAGRAM

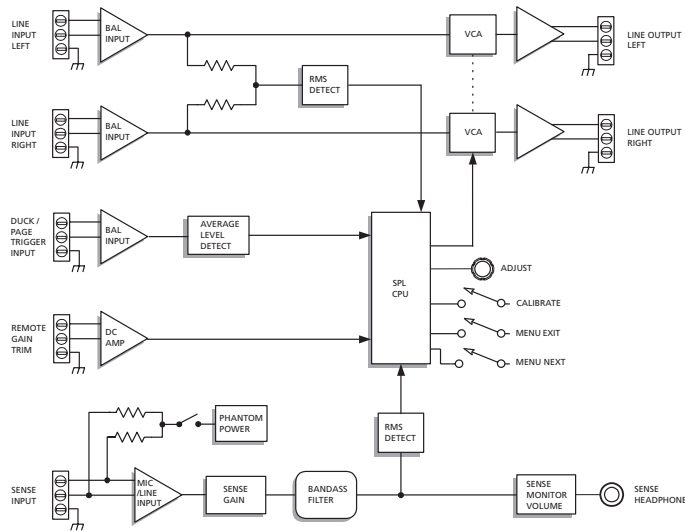

ACCESSORIES

19" Rackmount Tray height is 1U	#RM-3
Filler Panel covers unused half of rack tray	#FP-3
Y Power Cable connects a 371 with any other 300 Series product	#PY-3
RC-3 Remote Control controls one volume channel	#RC-3

SPECIFICATIONS

Input/Output

Maximum Input Level	+20 dBu balanced, +20 dBu unbalanced
Program Input Impedance	>20 k ohms balanced, >10 k ohms unbalanced
Input Common Mode Rejection	>40 dB
Maximum Output Level	+26 dBu balanced (20 k ohm load) +22 dBm balanced (600 ohm load)
Output Impedance	200 ohms balanced, 100 ohms unbalanced

Performance Data

Program Frequency Response	20 Hz to 20 kHz, +0, -1 dB
Program Path THD+N	<0.025% (+4 dBu in, +4 dBu out)
Output Gain Limits	+20, -30 dB
Sense Channel Frequency Response	-3 dB at 300 Hz and 6000 Hz
Sense Channel Gain	selectable, 0 dB to +70 dB
Additional Headphone Monitor Gain	28 dB maximum
Program Channel Output Noise	-95 dBu @ unity gain, typical
Master Output Level Adjustment Range	+/-10 dB internal, +10 dB to -50 dB remote

ARCHITECTS AND ENGINEERS SPECIFICATIONS

The Ambient Level Controller (ALC) shall control the output level of the sound system in response to the observed acoustical noise level within the controlled space during system operation. The ALC shall utilize an external microphone to sense the ambient noise level. These measurements shall be made continuously. The ALC shall accommodate musical or paging program signals. Provision shall be made for the user to monitor the audio signal used by the ambient sense system by using headphones.

The ALC shall provide user-adjustable parameters to alter the way that it responds to changes in the ambient noise level. These parameters are: minimum and maximum gain through the device, gain:sense ratio, program AGC or compression, and averaging time. In addition, the ALC shall provide active mode, bypass mode, and a history mode that collects and displays ambient noise history from the controlled space. The sense input shall accept either mic or line level signal. The sense input gain shall be adjustable, and 15 volt phantom power shall be available. A master output level control shall also be provided.

The ALC shall provide two independent line level balanced inputs and outputs that control two audio signals. The maximum input level shall be +20 dBu and the maximum output level shall be +26 dBu (+22 dBm into 600 ohms) balanced. The balanced input

impedance shall be 20,000 ohms and the output source impedance shall be 200 ohms balanced, 100 ohms unbalanced. The gain control range shall be -30 dB to +20 dB. The frequency response shall be 20 Hz to 20 kHz +/-1 dB with THD+N less than 0.025% at +4 dBu over the same range of frequencies. The output noise of the device shall be less than -95 dBu (20 kHz noise bandwidth, unity gain). The input and output configuration shall be active balanced.

All connections shall utilize barrier-style terminal strips. In addition to the audio input/output connections, there shall be a connection provided for a ducker input. The ducker circuit will have an adjustable threshold and will inhibit response to changes in ambient level when signals applied to the ducker input are above the threshold level.

A front panel power indicator shall be provided. A liquid crystal display shall be provided to communicate operating parameters and setup information with the user. A lockout function shall be available to prevent parameter setting changes by unauthorized users.

The ALC shall occupy half of the width of one rack space and shall be housed in a metal enclosure. It shall use an external, safety agency approved, power supply. The Ambient Level Controller shall be the Symmetrix model 371 SPL Computer.

Connections

Line Inputs, Sense Input, Ducker Control,	
Remote Gain, Line Outputs	Euroblock
Power In	7-pin DIN
Headphone	1/4 in. TRS, will drive mono or stereo headphones

Physical

Size (H x W x D)	1/2 rack unit
	1.75 in. x 8.5 in. x 6.5 in. / 4.445 cm x 21.59 cm x 15.875 cm
Shipping Weight	4.5 lbs./2.03 kg

Electrical

Power Requirements	10 W maximum, Symmetrix PS-3 or PS-3E only
PS-3	115 V, 60 Hz AC nominal
PS-3E	230 V, 50 Hz to 60 Hz AC nominal



Symmetrix, Inc.
14926 35th Avenue West
Lynnwood WA 98037 USA

Tel 425.787.3222
Fax 425.787.3211
www.symmetrixaudio.com

© 2001 Symmetrix, Inc. All rights reserved. All specifications are subject to change without notice. Symmetrix products are manufactured in the USA.