


VP-1 15-Pin HD to 5-BNC Bi-directional Format Converter




The **VP-1** is a high performance passive format converter for all RGBHV and 15-pin HD connector applications. It converts 15-pin HD computer graphics video signals to 5-BNC RGBHV signals and vice versa.

Compatible with HDTV component video signals when used with a breakout cable such as the Kramer C-GM/3RVF.



FEATURES

- **15-Pin to 5 BNC bi-directional passive format converter.**
- **ID Bit Control.**
- **Extra Compact Size** - Part of the Kramer TOOLS™ family of compact, high quality and cost effective solutions, housed in a miniature, smaller than usual, enclosure.

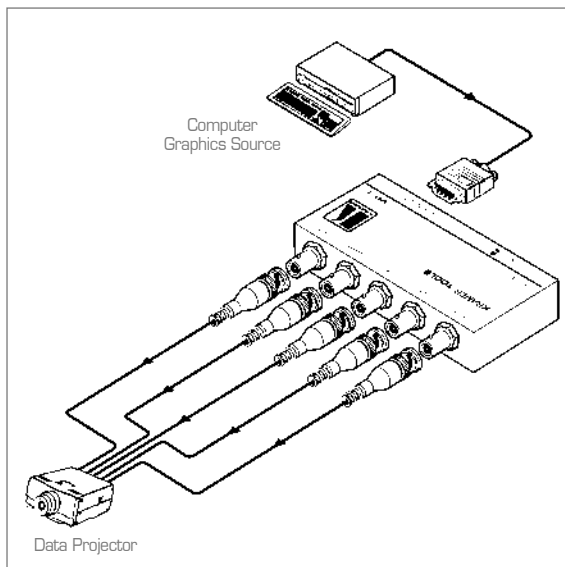

TECHNICAL SPECIFICATIONS

INPUTS:	VGA/UXGA on an HD15F connector or RGBHV on BNC connectors.
OUTPUTS:	RGBHV on BNCs or VGA/UXGA on an HD15 connector.
MAX. OUTPUT LEVEL:	4Vpp/75Ω.
BANDWIDTH (-3dB):	1800MHz (1.8GHz).
CONTROLS:	ID bit on/off.
DIMENSIONS:	99mm x 46.5mm x 24.1mm (3.9" x 1.8" x 0.95") W, D, H.
WEIGHT:	0.2kg. (0.44lbs.) approx.

