



# PRECISION SERIES

compact amplifiers



audio performance • high-efficiency • reliability • lightweight



# audio performance • high efficiency

## ELECTRO-VOICE® - WORLD-CLASS POWER AMPLIFIERS

Electro-Voice® is a leading professional audio company and has over 75 years of experience in the design and manufacture of loudspeakers and microphones. But many are not aware that Electro-Voice® has also more than 50 years of expertise in the designing and building high performance professional power amplifiers as well. Over the years, an unwavering commitment to be the

benchmark in professional amplifier design has made Electro-Voice® the "gold standard" of amplification for stadiums, arenas, theatres, cinemas, discotheques and clubs all around the globe. Due to their sonic purity and extreme reliability, EV amplifiers have become established in top concert sound and professional installation projects worldwide.

## PRECISION SERIES COMPACT AMPLIFIERS - HI-EFFICIENCY IN A LIGHT & COMPACT FORMAT

For more than 10 years, EV's Precision Series Linear Amplifiers including the flagship P3000, have proven themselves with their outstanding audio performance and reliability in many demanding audio applications. In this tradition we are introducing the new Precision Series Compact amplifiers, which offer our proven Precision Series

performance and reliability in a new compact, light-weight format. This is made possible by incorporating a highly efficient Class-H design, which results in substantially less heat being generated. This allows the overall size of the amplifier to be reduced substantially without sacrificing performance or reliability.


## HOW IT WORKS - INNOVATIVE ENGINEERING

In EV's Class H design, rather than supplying the voltage for the maximum output power permanently, the permanent voltage rail is designed to cover the average music signal. If dynamic peaks require a higher output voltage, the voltage rail is switched to the maximum. This process saves nearly 50% of the power consumption in a conventional design and results in a dramatic reduction in heat output. The real test in a successful Class-H design is to


make the voltage switching totally transparent to the user. This is where EV's amplifier engineering excellence makes the difference over other so-called "Class-H" designs. The audio performance of the Precision Series Compact amplifiers speaks for itself. They truly set the new standard in Class-H amplifiers and meet the expectations we set the original Precision series models.

## UNIQUE PERFORMANCE - UNMATCHED RELIABILITY

- Four models ranging from 2 x 600 W to 2 x 1600 W
- Legendary EV's Precision Series sound
- 30% Dynamic Headroom
- Class H-Design for less heat dissipation
- Very light and compact format
- High precision detent front controls
- Dynamic audio limiter
- Robust construction & reliable design, made in Germany
- Unique protection package including Back-EMF protection

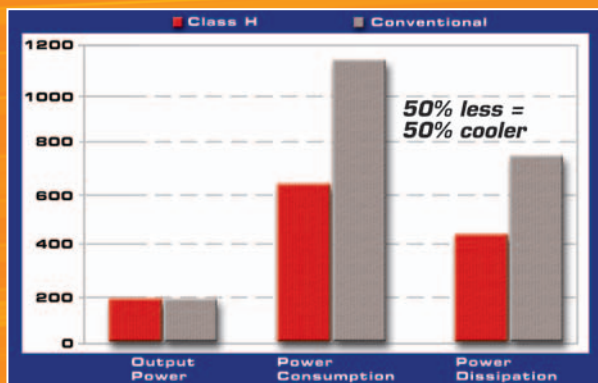

A conventional amplifier design has nearly double the power consumption and requires double the power dissipation over EV's Class-H Design of equivalent output power. The Precision Series Compact amplifier runs much cooler even under adverse conditions.

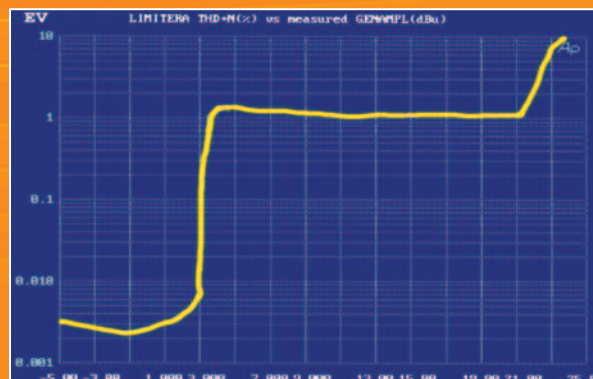

The THD of the amplifier is limited to a maximum of 1% for signals up to +21dBu. Even if overdriven, the amplifier will not create any objectionable "clipping signal effects" that are so fatal for speaker components.

# reliability • lightweight



**CP 3000 S** The Flagship of the Precision Series Compact amplifiers. It's the first Precision Series amplifier utilizing a switch-mode power supply, but also the first switch-mode amplifier with EV's Precision Series sound. With up to 2 x 1600 watts into 2 Ohms and 2 x 1100 watts into 4 Ohms it is not only the most power-

ful in line, but also the lightest model with only 8,15 kg (17.96 lbs). The CP3000S is state-of-the art for all kinds applications. It's specifically designed to allow for long-term driving of low loads with subwoofers without stress. It's reliability coupled with it's pleasing, rich sound makes it the first choice for all mid and hi speaker cabinets.



**CP 2200** With up to 2 x 1100 watts into 2 Ohms and 2 x 800 watts into 4 Ohms the CP2200 is not only a perfect complement to many fullrange speaker cabinets, but also mid- and hi-

frequency components in larger concert-sound systems. The CP2200 utilizes a conventional transformer power supply, but still weights only 16 kilograms (35.2 lbs).



**CP 1800** Supplies up to 2 x 900 watts into 2 Ohms and 2 x 600 watts into 4 Ohms. Dedicated for smaller size full range speaker systems and

hi-frequency components in multiway systems. The CP1800 utilizes a conventional transformer power supply.



**CP 1200** With up to 2 x 600 watts into 2 Ohms and 2 x 400 watts into 4 Ohms dedicated for small fullrange cabinets and individual hi-frequency

components in multiway systems. The CP1200 utilizes a conventional transformer power supply.



# SPECIFICATIONS



	CP 3000 S			CP 2200			CP 1800			CP 1200		
LOAD IMPEDANCE:	2 Ω	4 Ω	8 Ω	2 Ω	4 Ω	8 Ω	2 Ω	4 Ω	8 Ω	2 Ω	4 Ω	8 Ω
MAXIMUM MIDBAND OUTPUT POWER THD = 1%, 1 kHz, Dual Channel	1600 W	1100 W	600 W	1100 W	800 W	500 W	900 W	600 W	350 W	600 W	400 W	240 W
RATED OUTPUT POWER THD = 0,1 %, 20 Hz ... kHz	-	900 W	450 W	-	700 W	350 W	-	500 W	250 W	-	300 W	150 W
MAX. SINGLE CHANNEL OUTPUT POWER Dynamic Headroom, IHF-A	2600 W	1400 W	720 W	2200 W	1200 W	625 W	1450 W	850 W	450 W	1100 W	580 W	300 W
MAXIMUM BRIDGED OUTPUT POWER THD = 1%, 1 kHz	-	3200 W	2200 W	-	2200 W	1600 W	-	1800 W	1200 W	-	1200 W	800 W
MAXIMUM RMS VOLTAGE SWING THD = 1%, 1 kHz	78 V			72 V			62 V			50 V		
POWER BANDWIDTH THD = 1%, 1 kHz, half power @ 4 Ω	10 Hz ... 60 kHz											
VOLTAGE GAIN ref. 1 kHz	32.0 dB											
INPUT SENSITIVITY Rated power @ 8 Ω, 1 kHz	+5.8 dBu (1.51 Vrms)			+4.7 dBu (1.33 Vrms)			+3.2 dBu (1.12 Vrms)			+1.15 dBu (0.88 Vrms)		
THD @ rated output power	< 0.05 %											
IDE- SMTP 60 Hz, 7kHz	< 0.02 %											
DIM30 3.15 kHz, 15 kHz	< 0.05 %			< 0.01 %			< 0.01 %			< 0.01 %		
MAXIMUM INPUT LEVEL	+22 dBu (9.76 Vrms)											
CROSSTALK ref. 1 kHz, rated output power	< -80 dB											
FREQUENCY RESPONSE ref. 1 kHz	15 Hz ... 40 kHz (±1dB)											
INPUT IMPEDANCE active balanced	20 kΩ											
DAMPING FACTOR 1 kHz	> 300											
SLEW RATE	35 V/μs			35 V/μs			30 V/μs			25 V/μs		
SIGNAL TO NOISE RATIO (A-weighted)	107 dB			107 dB			105.5 dB			103.5 dB		
POWER REQUIREMENT	240 V, 230 V, 220 V, 120 V or 100 V ; 50 ... 60 Hz (factory configured)											
POWER CONSUMPTION	820 W			660 W			500 W			600 W		
PROTECTION	Audio Limiters, High Temperature, DC, HF, Back-EMF, Peak Current Limiters, Inrush Current Limiters, Turn-On delay											
COOLING	Front to Rear, 3-stage Fans											
DIMENSIONS (W x H x D)	483 mm x 88.1 mm x 368.8 mm (19" x 3.5" x 15.22")											
WEIGHT	8.15 kg (17.96 lbs)			16 kg (35.2 lbs)			15 kg (33 lbs)			13.5 kg (30.8 lbs)		
OPTIONAL ACCESSORY	Rear-Rack Mount Kit 18" (D) 112933											

Note: all measurements both channels driven into 8 Ohms unless otherwise specified.



## Americas

USA: Telex Communications Inc. 12000 Portland Ave South, Burnsville, MN 55337, USA  
Phone: 1-800-392-3497, Fax: 1-800-955-6831  
Canada: Phone: 1-866-505-5551, Fax: 1-866-336-8467  
Latin America: Phone: 1-952-887-5532, Fax: 1-952-736-4212

## Europe, Africa & Middle-East

Germany: EVI Audio GmbH · Hirschberger Ring 45, D 94315, Straubing, Germany • Phone: +49 9421-706 0, Fax: +49 9421-706 265  
France: EVI Audio France S.A. · Parc de Courcerin, Allée Lech Walesa, F 77185 Lognes, France • Phone: +33 1-6480-0090, Fax: +33 1-6006-5103  
UK: Shuttlesound Ltd. · The Willows Centre, Willow Lane, Mitcham, Surrey CR4 4NX, UK • Phone: +44 208 646 7114, Fax: +44 208 640 7583

## Asia & Pacific Rim

Japan: EVI Audio Japan Ltd. · 5-3-8 Funabashi, Setagaya-Ku, Tokyo, Japan 156-0055 • Phone: +81 3-5316-5020, Fax: +81 3-5316-5031  
Australia: EVI Audio (Aust) · Pty Ltd. Slough Business Estate, Unit 23, Silverwater, N.S.W. 2128, Australia • Phone: +61 2-9648-3455, Fax: +61 2-9648-5585  
China: EVI Audio (HK) Ltd. · 7th Floor China Minmetals Tower, No. 79 Chatham Road South, Tsim Sha Tsui, Kowloon, HK • Phone: +852 2351-3628, Fax: +852 2351-3329  
Singapore: Telex Pte. Ltd. 3 · 015A Ubi Road 1, 05-10 Kampong Ubi Industrial Estate, Singapore 408705 • Phone: +65 6746-8760, Fax: +65 6746-1206