



**F R I
S P E A K E R
S Y S T E M S**

General Product Description

Two-way full-range passive system, with biamp option, in a vented trapezoidal enclosure. Includes a 15-inch woofer and a 2"/50mm voice coil compression driver on a user-rotatable 60° × 40° constant-directivity horn. Cloth coverable steel grille.

Applications


The FRi-152/64 uses EV's exclusive RMD™ (Ring-Mode Decoupling) to provide outstanding vocal clarity and intelligibility in a cost-effective two-way system. The versatile, compact enclosure features a comprehensive system of 3/8-16 threaded mounting/suspension points, to allow horizontal or vertical mounting. Simply rotate the horn to select the desired coverage pattern. The FRi series is 28-inches high, creating a uniform look in arrays. Five year warranty.

Applications include:

- | | |
|-------------------|------------|
| Stadiums | Arenas |
| Houses of Worship | Discos |
| Live music clubs | Gymnasiums |

Speaker Description

Part Number	FRi-152/64-BLK
LF Section & Components	DL15BFH 15-inch woofer in vented enclosure
HF Section & Components	DH2t compression driver with 2-inch titanium diaphragm on a constant-directivity horn
System Configuration	Two-way, Full range
Powering Configuration	Passive or Biamp
Recommended High-Pass Frequency (12 dB/octave min.)	40 Hz
Cabinet Type (shape)	Trapezoidal
Enclosure Materials	13-ply Birch plywood
Finish	Black Acrylic
Connectors	Two barrier strips
Suspension Hardware	(12) 3/8-16 threaded mounting/suspension points (3 each on top and bottom, 2 per side, 2 on rear)
Grille	Powder-coated perforated 16GA steel
Options	WH - white acrylic finish UN - unfinished

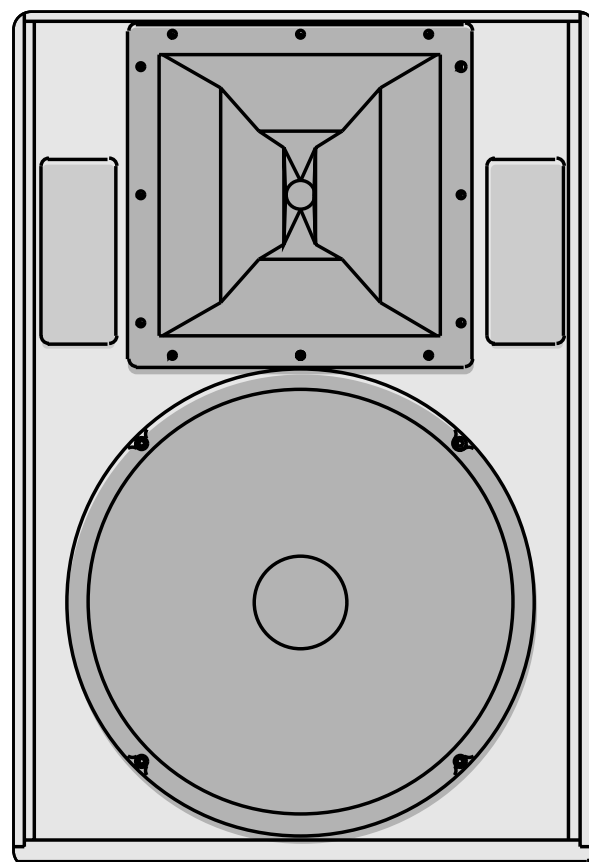

Specification Sheet FRi-152/64

Speaker Characteristics

Frequency Response (passive)	
±3 dB	70 Hz-15 kHz
-10 dB	42 Hz-16 kHz

Axial Sensitivity	
(SPL/1 Watt/1m) Passive	98 dB
(SPL/1 Watt/1m) Biamp (LF/HF)	98/112 dB

Impedance	
Passive	8 ohms
Biamp (LH/HF)	8/8 ohms


Power Handling		
Passive	Long-term (EIA)	350 watts
	Short-term peak	1,400 watts
Biamp-LF	Long-term (EIA)	350 watts
	Short-term peak	1,400 watts
Biamp-HF	Long-term (AES)	60 watts
	Short-term peak	240 watts

Calculated Maximum Output SPL	
Peak	129 dB
Long Term	123 dB

Nominal Coverage Angle	
Horizontal (-6 dB)	60°
Vertical (-6 dB)	40°

Dimensions		
Height	27.92 in.	(711 mm)
Width at front	19.03 in.	(483 mm)
Width at back	7.25 in.	(185 mm)
Depth	23.23 in.	(589 mm)
Trapezoid Angle	15° per side	

Weights		
Net Weight	70 lb.	(31.8 kg)
Shipping Weight	82 lb.	(37.3 kg)

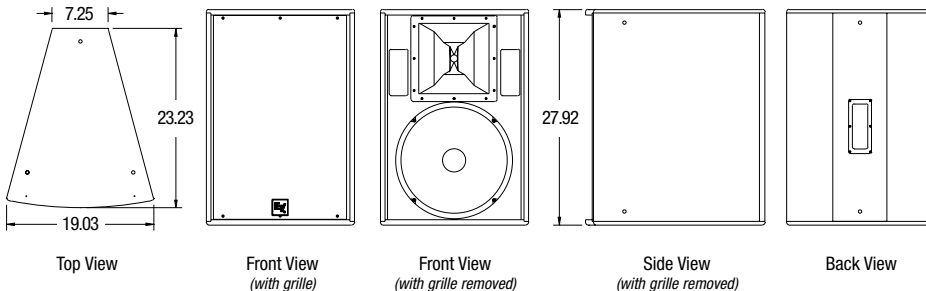

Architectural Specifications

The two-way full range loudspeaker system shall incorporate a 15" LF transducer and a 2"/50mm voice coil HF compression driver.

The LF driver shall be mounted in a vented enclosure tuned for optimum low-frequency response. The HF driver shall be loaded on constant-directivity horn with a nominal coverage pattern of 60° (h) × 40° (v). An internal passive filter network shall provide acoustical crossover and system equalization. Input panel shall be easily changeable from passive to biamp operation via internal connector.

System frequency response shall vary no more than ±3 dB from 70 Hz to 15 kHz measured on axis. The loudspeaker shall produce a sound pressure level (SPL) of 98 dB on axis at 1 meter with a power input of 1 watt, and shall be capable of producing a full-power peak output of 129 dB on axis at 1 meter. It shall handle 350 watts of amplifier power long-term (EIA Standard), and shall have a nominal impedance of 8 ohms.

The loudspeaker enclosure shall be trapezoidal in shape. It shall be constructed of 13 ply void-free cross-grain-laminated Birch plywood and shall employ extensive internal bracing. It shall be finished in black acrylic. Input connectors shall be two at 2 terminal barrier strips. A total of twelve 3/8-16 threaded mounting/suspension points shall be provided, (three each on top and bottom, two per side, two on rear). The front of the loudspeaker shall be cloth coverable with a powder-coated perforated 16 GA steel grille.

The two-way full range loudspeaker shall be the Electro-Voice model FRi-152/64.



EVERYWHERESM

- USA** 12000 Portland Ave South, Burnsville, MN 55337, Phone: 952-884-4051, FAX: 952-884-0043
- Canada** 705 Progress Avenue, Unit 46, Scarborough, Ontario, Canada, M1H2X1, Phone: 416-431-4975, 800-881-1685, FAX: 416-431-4588
- Switzerland** Kellenstrasse 11, CH-2563 IPSACH, Switzerland, Phone: 41/32-331-6833, FAX: 41/32-331-1221
- Germany** Hirschberger Ring 45, D94315, Straubing, Germany, Phone: 49 9421-706 392, Fax: 49 9421-706 287
- France** Parc de Courcerin, Allee Lech Walesa, Lognes, 77185 Marne La Vallee, France, Phone: 33/1-6480-0090, FAX: 33/1-6480-4538
- Australia** Unit 23, Block C, Slough Business Park, Slough Avenue, Silverwater, N.S.W. 2128, Australia, Phone: 61/2-9648-3455, FAX: 61/2-9648-5585
- Hong Kong** Unit E & F, 21/F, Luk Hop Industrial Bldg., 8 Luk Hop St., San PO Kong, Kowloon, Hong Kong, Phone: 852-2351-3628, FAX: 852-2351-3329
- Japan** 2-5-60 Izumi, Suginami-ku, Tokyo, Japan 168, Phone: 81-3-3325-7900, FAX: 81-3-3325-7789
- Singapore** 3015A Ubi Rd 1, 05-10, Kampong Ubi Industrial Estate, Singapore 408705, Phone: 65-746-8760, FAX: 65-746-1206
- Mexico** Av. Parque Chapultepec #66-201, Col. El Parque Edo. Mex. 53390, Phone: (52) 5358-5434, FAX: (52) 5358-5588
- UK** 4, The Willows Centre, Willow Lane, Mitcham, Surrey CR4 4NX, UK, Phone: 44 181 640 9600, FAX: 44 181 646 7084
- Africa, Mid-East** 12000 Portland Ave South, Burnsville, MN 55337, Phone: 952-887-7424, FAX: 952-887-9212
- Latin America** 12000 Portland Ave South, Burnsville, MN 55337, Phone: 952-887-7491, FAX: 952-887-9212

U.S.A. and Canada only.

For customer orders, contact the Customer Service department at 800/392-3497 Fax: 800/955-6831

For warranty repair or service information, contact the Service Repair department at 800/685-2606

For technical assistance, contact Technical Support at 800/392-3497

Please refer to User Guide Sheet for warranty information.

Specifications subject to change without notice.

www.electrovoice.com • Telex Communications, Inc. • www.telex.com

©Telex Communications, Inc. 6/2000 Part Number 535882-4.00