




**Electro-Voice®**  
 TELEX/EVI Audio  
 1 Telex Drive  
 Morrilton, Arkansas 72110  
 Phone: 1-800-685-2606  
 FAX: 501-354-1118

# SERVICE DATA

## EVID C8.2HC

(301262-000)

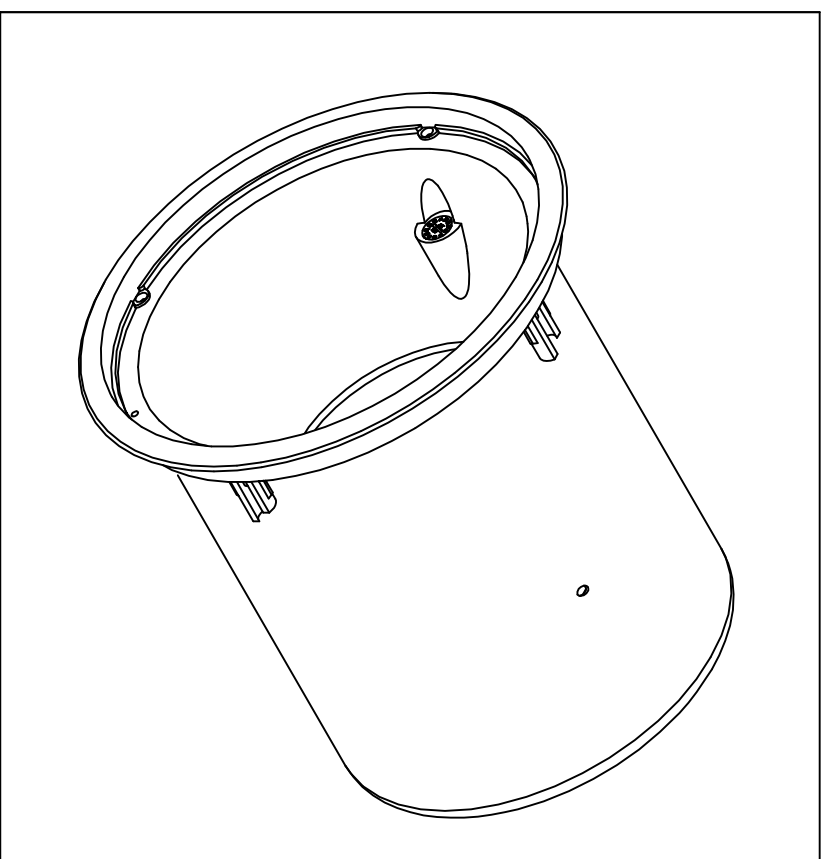

### PARTS LIST

QUANTITIES SHOWN ARE FOR ONE COMPLETE UNIT, UNITS COME PACKAGED IN PAIRS

ITEM	EVID C8.2HC 301262-000 PART NO.	QTY.	DESCRIPTION
1	560213-000	1	ENCLOSURE S/A, EVID C8.2HC
2	560204-000	1	WOOFER, 8" COAX, EVID C8.2
3	560214-000	1	CROSSOVER S/A, WITH 60W TRANSFORMER, EVID C8.2HC
4	560206-000	1	CROSSOVER S/A, EVID C8.2
5	559020-000	1	TRANSFORMER, 60W, EVID C10.1 AND C8.2HC
6	545095-000	1	TRANSFORMER SWITCH, EVID C10.1 AND C8.2HC
7	539173-000	1	CONNECTOR, REMOVABLE INPUT, PHOENIX TYPE, EVID CEILING SPEAKERS
8	500618-000	4	MOUNTING TABS, EVID CEILING SPEAKERS
9	581006-000	4	SCREW, M4 X 52MM, BLK ZINC
10	500648-000	1	TAP SELECTOR, TRANSFORMER SWITCH EVID C10.1 AND C8.2HC
11	570207-000	1	LABEL, ENCLOSURE, EVID C8.2HC
12	570206-000	1	LABEL, INPUT, EVID CEILING SPEAKERS
13	66121	2	TUBING, HEAT SHRINK, TYP VFP-3M BLK, 3/16 DIA [CUT TO 2.5" LENGTHS]
14	500612-000	2	TILE RAIL, EVID CEILING SPEAKERS
15	500649-000	1	C-BRACKET, EVID C10.1, C8.2HC
16	560212-002	1	GRILLE S/A, EVID C10.1, C8.2HC
17	63371CP	14	SCR, 8-15 X 1/2, PAN HD, XREC, TYPE A, STL, BLK ZINC
18	581025-000	2	SCR, M4-0.7 X 25MM, ZINC CHROMATE
19	581026-000	5	SCR, M4-0.7 X 10MM, ZINC CHROMATE
20	581027-000	3	SCR, M4-0.7 X 18MM, ZINC CHROMATE
21	586004-000	5	NUT, M4-0.7, ZINC CHROMATE
22	3980AE	4	WASHER, #8, 7/16 X 3/16 X 3/64" (CHTD ON 3980)
23	584007-000	2	WASHER, RUBBER, .60" OD X .20" ID X .12" T, EVID CEILING SPEAKERS
24	581028-000	2	SCR, M4 X 10MM, ZINC CHROMATE
25	500694-000	6	CLIP, PLASTIC, BAFFLE ATTACHMENT, EVID C8.2HC
26	500693-000	1	GASKET, RUBBER, 280MM ID, EVID C8.2HC
27	500656	1	BAFFLE, EVID C8.2HC

#### ADHESIVES


A	97207	LOCTITE® "C" 24231 50 ML BTL
---	-------	------------------------------

#### NOTES:


EVID C8.2HC BAFFLE FASTENED TO CAN WITH TABS (ITEM 25) AND SCREWS (ITEM 17) INSTEAD OF GLUE FOR WOOFER ACCESS

#### TO REPLACE WOOFER:

1. REMOVE BAFFLE TAB SCREWS (ITEM 17) FROM BAFFLE. ACCESS THE BACK OF THE BAFFLE AND REMOVE THE WOOFER SCREWS (ITEM 17).
2. DISCONNECT WOOFER AND TWEETER LEADS. FOR TWEETER LEADS, CUT SHRINK WRAP AROUND THE LEADS, BEING CAREFUL TO NOT CUT THE WIRES.
3. PUT A HEAT SHRINK TUBE (ITEM 13) OVER EACH OF THE CROSSOVER'S TWEETER LEADS (ITEM 4) (SEE FIG. 1) AND RECONNECT THE CROSSOVER TO THE TWEETER AND WOOFER LEADS, MAINTAINING THE CORRECT POLARITY.
4. SLIDE THE HEATSHRINK TUBES (ITEM 13) IN PLACE, COVERING BOTH TWEETER LEADS. SHRINK TO FIT TIGHTLY WITH HEAT GUN (SEE FIG. 2).
5. SCREW WOOFER BACK ON TO BAFFLE AND REATTACH BAFFLE TO THE CAN.

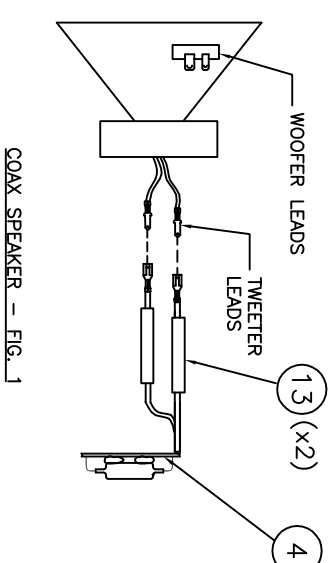

COAX SPEAKER - FIG. 1

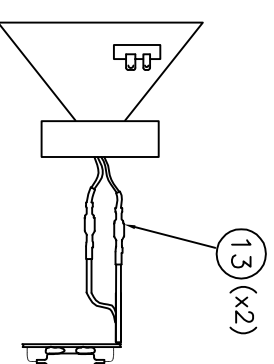

REATTACHED TWEETER LEADS - FIG. 2

