

W I R E D
M I C R O P H O N E

N/D267a and 267as User Manual

The acoustic response of the N/D267a and 267as presents optimal performance in a live sound environment. The new “vocally optimized bass” or VOB™ technology provides the performer with reduced resonant distortion at low frequencies. Critical damping of the low frequency resonant peak has resulted in a microphone that replaces the “muddiness” found in competitive models with greater warmth and increased vocal clarity. The increased clarity permits greater working distances than other competitive microphones, and ensures a clean, clear, consistent sound that “cuts through the mix.”

- VOB™ technology provides tailored bass response for controlled “proximity effect” and exceptional vocal clarity
- Cardioid pattern for superior feedback rejection and acoustic isolation
- Consistent sound over greater working distances than competitive models
- Neodymium based magnet structure provides greater sensitivity and signal-to-noise ratio.
- Warm Grip™ handle for more comfortable feel.
- On/Off switch on N/D267as

Operation

The low frequency response of the N/D267a and 267as microphone varies with the distance from the sound source. Known as “proximity effect,” maximum bass response is produced in “close-up” use with the microphone ¼ inch from the sound source. Normal bass response is experienced with working distances greater than 24 inches. Working close to the microphone will produce a more robust sound. Close up positioning of the microphone will also reduce the potential for feedback from the sound reinforcement system. When close-talked, the bass-boost provides an increase in overall microphone output level. The mixer gain may be proportionately reduced, resulting in a reduction of the system’s sensitivity to feedback caused by sound entering the microphone from the loudspeakers.

Microphone Use and Placement

Please note that mic-ing techniques are a matter of personal preference. These are merely guidelines to assist in the placement of the microphone to gain optimal performance.

Usage	Optimal Placement
Vocals	Zero to six inches from the windscreen, and on axis with the microphone.
Spoken Word	Five to ten inches from the windscreen, and on axis with microphone.

Standard Placement & Use Guidelines

1. Always point the microphone at the desired source of sound, and away from any unwanted sources.
2. The microphone should be located close to the sound source to minimize interference from other potential sound sources.
3. Use the 3-to-1 rule when using multiple microphones. Place each microphone three times farther from other microphones as from the desired sound source.
4. Minimize over-handling of the microphone to reduce unwanted mechanical noise
5. Working close to the microphone will increase the bass tone and also provide increased gain-before-feedback.


Warranty

This product is guaranteed against malfunction from any cause for two (2) years from the date of original purchase. In addition, the Limited Warranty for the acoustic system contained in the microphone shall apply for the life of this product, defines as a period of ten (10) years from the date that the manufacture of this microphone model has been discontinued. Any and all active electronics incorporated in this microphone are guaranteed against malfunction due to material workmanship for a period of three (3) years from the date of original purchase. This Limited Warranty does not extend to cables, connectors, or switches.

For warranty service please call us at:

616-695-6831 or

1-800-234-6831

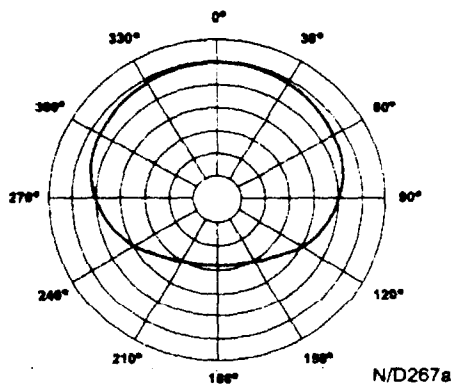

N/D267a and N/D267as Specifications

Element: Dynamic,
N/DYM[®] magnet structure

Frequency Response:

Close Response: 45Hz to 15kHz

Far Response: 100Hz to 15kHz

Polar Pattern: Cardioid

Impedance: Low-Z balanced (300 Ohms)

Sensitivity:

Open Circuit Voltage: ... 2.9 mV/Pascal @ 1.0kHz

Power Level: (0 dB=1mW/pascal) -51.5 dB

Switch: (N/D267as only)

Microphone Connector: 3-pin, XLR-type

Polarity: Pin 2 positive, referenced to pin 3
with positive pressure on diaphragm

Finish: Non-reflecting black

Materials:

Memraflex[™] grille screen

Warm-Grip[™] handle

Dimensions:

Length @ 7.12 in. (181 mm)

Diameter @ 2.05 in. (52 mm)

Shank @ 0.80 in. (20mm)

Weight:


Net @ 8.4 oz (238 grams)

Shipping @ 18.2 oz (515 grams)

Accessories included:

Stand adapter (black)

Soft zippered 'gig' bag

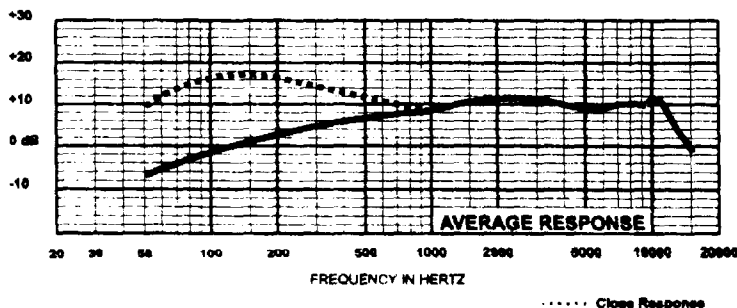

EVERYWHERE[™]

USA 8880A Irwin Ave. S., Minneapolis, MN 55420, Phone: 612/864-4861 FAX: 612/864-0043
 Canada 708 Progress Avenue, Unit 10, Scarborough, Ontario, Canada, M1H 2X1 Phone: 416-431-4875 FAX: 416-431-4686
 Switzerland Kallistrasse 1, CH-2503 BACH, Switzerland Phone: 011-41 52 331 0832 FAX: 011-41 52 331 1221
 Germany Hirschbergweg 48, D-94322 Jochimsberg, Bayern, Phone: 011-49 9431 7095 FAX: 011-49 9431 709296
 France Parc de Courville, 45, Rue de la Vallée, Le Val de France, France, Phone: 011 33 1 6480 0084 FAX: 011 33 1 6008 5133
 Australia Unit 23, Shough Business Estate, Silverdale NSW 1512, Australia Phone: 011 61 2 8648 3465 FAX: 011 61 2 8648 5868
 HongKong Unit E, 21/E Luk Hop Industrial Bldg., 8 Luk Hop St., San Po Kong, Kowloon, HongKong, Phone: 011 852 2351 3628 FAX: 011 852 2351 3329
 Japan 2-5-80 Izumi, Sakuragaoka-ku, Tokyo, Japan Phone: 011 81 3 3325 7800 FAX: 011 81 3 3325 7788
 Singapore *Suzi Comm. Pte Ltd, 301 B Aljunied Rd., #05 10, Singapore, Singapore 408705 Phone: 011 65 748 6780 FAX: 011 65 746 1208
 Mexico Tecnomic Especialidades S.A. de C.V., Av. Perote-Chetumal #58-201 21P, Cuernavaca, Mexico DF 62000 Phone: 011 52 5358 5434 FAX: 011 52 5358 5868

N/D267a
N/D267as

Part Number 535666