

Electro-Voice®

a MARK IV company

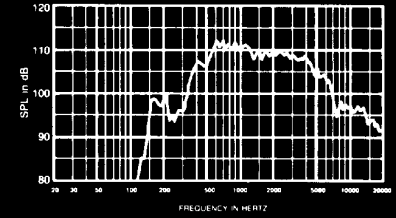


FIGURE 1
Axial Frequency Response 1 Watt/1 Meter

Model N/DYM® 1/2MT High-Frequency Acoustic Summation System

SPECIFICATIONS

The following specifications are in accordance with or exceed the AES Recommended Practice for Specification of Loudspeaker Components Used in Professional Audio and Sound Reinforcement (AES2-1984; ANSI S4.26-1984). See AES Recommended Practice section.

Power Frequency Response:

500-20,000 Hz (essentially flat)
500-5,000 Hz with 6-dB-per-octave roll-off to 20,000 Hz, rapid roll-off beyond)

Nominal Impedance, on HP Series Horns above 500 Hz:

16 ohms (single driver)

Minimum Impedance:

14 ohms at 6,000 Hz (single driver)

DC Resistance:

10.5 ohms (single driver)

Long-Term Average Power Capacity on HP Horns, Indicated Bands of Pink Noise, 8-Ohm Impedance Assumed,

24-Hours, 6-dB Crest Factor:

100 watts (500-20,000 Hz)

2 Hours, 6-dB Crest Factor:

150 watts (1,000-10,000 Hz)

Nominal Efficiency, 1,000-5,000-Hz Pink Noise, 8-Ohm Impedance Assumed:

28%

Maximum Long-Term Acoustic Power Output (24 hours):

28 watts

Recommended Minimum Crossover Frequency:

500 Hz

Sound Pressure Level at 1 Meter, 1 Watt Input Averaged from 500 Hz to 5,000 Hz:¹

115 dB, HP4020 horn

113 dB, HP6040 horn

111 dB, HP9040 horn

112 dB, HP64 horn

110 dB, HP94 horn

114 dB, HP420 horn

112 dB, HP640 horn

110 dB, HP940 horn

108 dB, HP1240 horn

Throat Diameter:

4.92 cm (1.94 in.)

Weight:

8.5 kg (18.6 lb)

Shipping Weight:

9.4 kg (20.7 lb)

N/DYM® 1mt-16

Voice Coil Diameter:

7.62 cm (3.00 in.)

Voice Coil Construction:

Rectangular edge-wound pure aluminum wire on a high-temperature polyimide form

Diaphragm Construction:

Integral all-titanium construction consisting of spherical diaphragm dome and geometrically optimized suspension; a low-fatigue, high temperature, long-duration-cure engineering polymer bonds the coil form to the diaphragm

Electrical Connection:

Screw terminals, each of which will accept a pair of 12-gauge wires and any smaller size

Polarity:

A positive voltage applied to the positive (+) terminal produces a positive acoustic pressure in the throat

MTA-22

Physical Connections,

Entrances (2):

Bolt-on, 1.30-in. diameter throat, 5-in. diameter mounting flange and four

clearance holes for 1/4-in. bolts on a 3.50-in. diameter bolt circle.

Exit:

Bolt-on, standard 2-in. diameter throat, 5-in. diameter mounting flange and four clearance holds for 1/4-in. bolts on a 4-in. diameter bolt circle. Bolt heads are captured by molded-in detail.

¹ Measured on axis in the far field with 1 watt input of band-limited pink noise from 500-5,000 Hz and calculated to 1 meter equivalent by inverse square law.

DESCRIPTION

The Electro-Voice N/DYM® 1/2MT is a high-performance, high-frequency acoustic summation system capable of unprecedentedly high acoustic power output over a wide frequency range.

The N/DYM® 1/2MT combines two N/DYM® 1mt-16 high-frequency drivers on an MTA-22 Manifold Technology® adapter.

High sound-pressure-level applications often require the use of multiple horn-and-driver combinations. This results in physically cumbersome arrays and, when two or more horns cover the same area, it results in destructive interference, often referred to as comb-filtering. This results in a familiar "swishing" sound when moving through or "walking" a system with music being played. By combining the outputs of two drivers into a single horn, the N/DYM® 1/2MT allows extremely high sound pressure levels to be generated by compact, lightweight arrays and without destructive interference.

The combination of extremely close driver packing, complementary positioning and a specially designed reflective summation path results in phase-coherent summation.

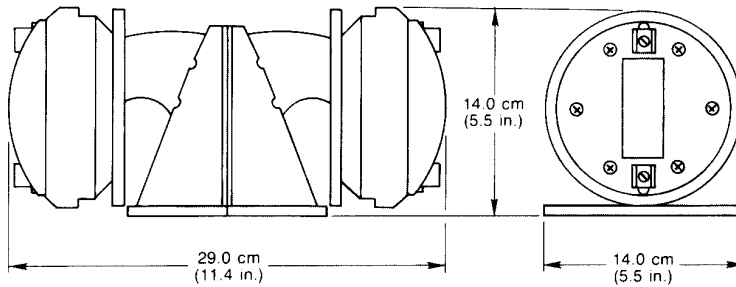


FIGURE 2
Dimensions

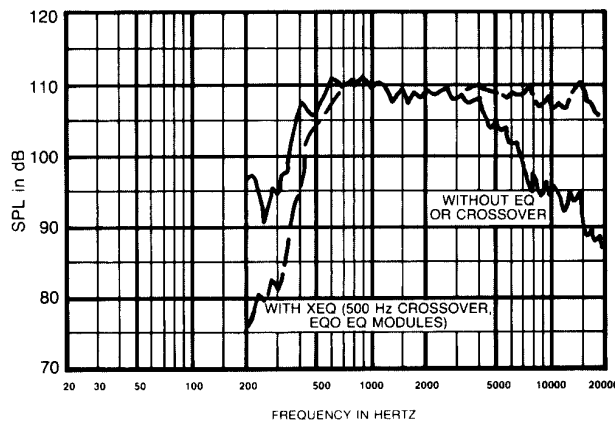


FIGURE 3
Axial Frequency Response with and without
Equalization, 1 Watt/1 Meter, HP9040 Horn

MECHANICAL CONNECTION

Bolts, washers, and nuts are provided for connecting the N/DYM® 1/2MT to a standard 2-inch-throat horn. The flange of the N/DYM® 1/2MT is molded to capture the bolt head, so installation is possible with a single wrench.

ELECTRICAL CONNECTION:

With two 16-ohm drivers and one amplifier 8-ohm, and 32-ohm systems are possible. The recommended electrical connections for these two systems are shown in Figure 8.

With more amplifiers, other wiring arrangements are possible. When using multiple amplifiers, care should be taken to ensure equal drive voltage across each driver.

RECOMMENDED HORNS

The following Electro-Voice horns are recommended for use with the HP64, HP94, HP420, HP640, HP940, HP1240, HP4020, HP6040, and HP9040.

CROSSOVER AND EQUALIZATION

As with all horn/driver combinations that combine high overall efficiency with constant-directivity, the N/DYM® 1/2MT and HP series horns provide "raw" or unequalized frequency response that rolls off above 5,000 Hz or so at about 6 dB per octave. Figure 3 shows the N/DYM® 1/2MT-HP9040 horn, with and without equalization. The equalization has been provided by an Electro-Voice XEQ-2 crossover/equalizer equipped with the EQU equalization module. While the equalization of a constant-directivity horn/driver combination can be achieved with a conventional one-third-octave equalizer, the use of the XEQ-2 crossover/equalizer with the appropriate accessory EQ module is recommended. This way, the broad-band equalization required by the horn/driver combination is supplied by the crossover/equalizer network, and the one-third-octave equalizer can be devoted to correcting the more subtle room- and array-related response anomalies. The following EQ modules are available for the N/DYM® 1/2MT:

Module	Horn(s)
EQR	HP940
EQS	HP1240
EQT	HP640
EQU	HP4020; HP6040; HP9040
EQV	HP420

Refer to the XEQ-2 and XEQ-3 engineering data sheets for more information on performance and application.

For passively crossed over systems, the XEQ804 and XEQ808 crossover/equalizers are available.

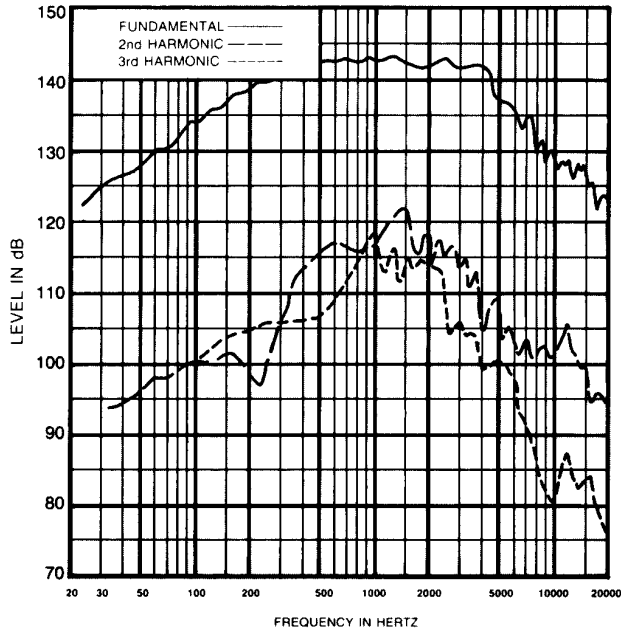


FIGURE 4
Distortion Response,
2-Inch Plane-Wave Tube, 10 Watts

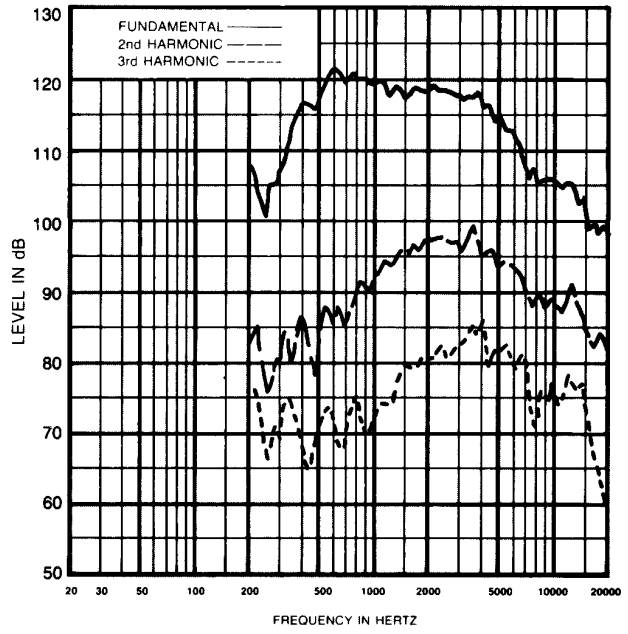


FIGURE 5
Distortion Response,
HP9040 Horn, 10 Watts/1 Meter

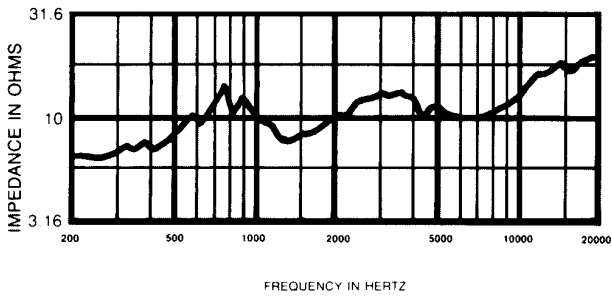


FIGURE 6
Impedance Response — 2-Inch Plane-Wave Tube

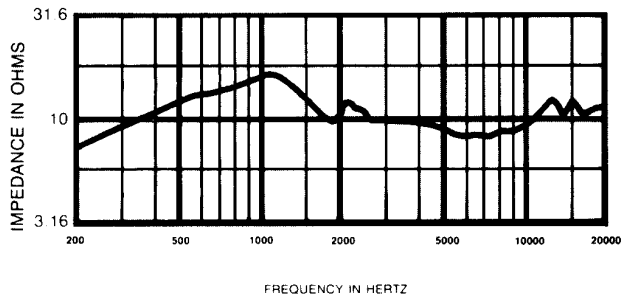


FIGURE 7
Impedance Response — HP9040 Horn

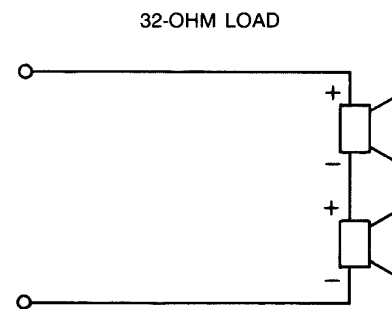
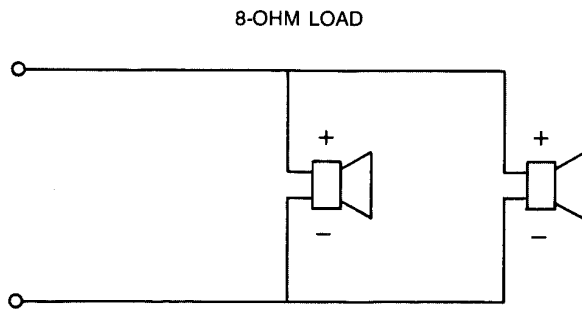


FIGURE 8
Electrical Connections

The N/DYM[®] 1/2MT specifications conform to the AES Recommended Practice for Specification of Components Used in Professional Audio and Sound Reinforcement (AES2-1984; ANSI S4.26-1984). This recommended practice was developed over a number of years by consultants, manufacturers and government agencies from around the world, so that the detailed performance information required in professional applications could be provided in a unified format. The recommended practice has been published in the October, 1984 issue of the *Journal of the Audio Engineering Society* (vol. 26, pp. 771-780). Individual copies of the recommended practice are available from the Audio Engineering Society, 60 East 42nd Street, New York, New York 10165, USA. Also appearing in this issue is an article which comments on the recommended practice from an engineering point of view (C.A. Henricksen, "Engineering Justifications for Selected Portions of the AES Recommended Practice for Specification of Loudspeaker Components," pp. 763-769).

smoothly rolled-off response from 5,000 to 20,000 Hz. Its efficiency shall not be less than 28%. Its sensitivity, when mounted on an EV HP4020 horn, shall be 115 dB (1 W/1 m) with a 500-to-5,000-Hz pink-noise signal applied.

The system shall be capable of handling a 100-watt, 500-to-20,000-Hz pink-noise signal with a 6-dB crest factor (600 watts peak) for a period of 24 hours. In addition, it shall be capable of handling a 150-watt, 1,000-to-20,000-Hz pink-noise signal, with 6-dB crest factor, for a period of two hours.

The loudspeaker system shall have a length of 29.0 cm (11.4 in.) and a depth of 14.0 cm (5.5 in.). It shall have a 1.94-inch throat opening, with four 1/4-20 threaded bolt holes on a 4-inch-diameter circle for mounting.

The unit shall weigh no more than 8.5 kg (18.6 lb).

The loudspeaker system shall be the Electro-Voice model N/DYM[®] 1/2MT.

extend to incidental or consequential damages. Some states do not allow the exclusion or limitation of incidental or consequential damages, so the above exclusion may not apply to you. Repair by other than Electro-Voice or its authorized service agencies will void this guarantee. A list of authorized warranty service agencies is available from Electro-Voice, Inc., 600 Cecil Street, Buchanan, MI 49107 (AC/616-695-6831); or Electro-Voice West, 8234 Doe Avenue, Visalia, CA 93291 (AC/209-651-7777). This warranty gives you specific legal rights, and you may also have other rights which vary from state to state.

Service and repair address for this product: Electro-Voice, Inc., 600 Cecil Street, Buchanan, Michigan 49107.

Specifications subject to change without notice.



ELECTRO-VOICE, INC., 600 Cecil Street, Buchanan, Michigan 49107

MANUFACTURING PLANTS AT ■ BUCHANAN, MI ■ NEWPORT, TN ■ SEVIERVILLE, TN ■ OKLAHOMA CITY, OK ■ GANANOQUE, ONT.
©Electro-Voice Inc. 1991 ■ Litho in U.S.A. Part Number 531182-833

a MARK IV company