


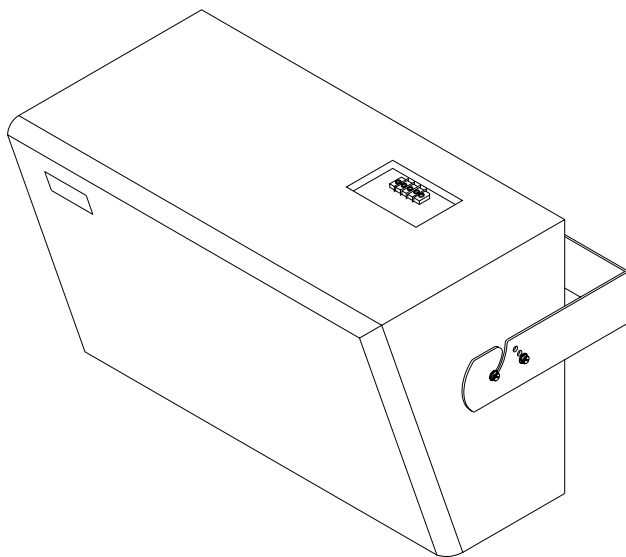

SL12-MB

Adjustable Mounting Bracket Kit

- Easily mounted
- Ceiling suspended or wall mounted
- Adjustable angle positioning
- Attractive black crinkled finish

Description

The SL12-MB adjustable mounting bracket kit is designed to permanently attach the Electro-Voice SL12-2H either suspended from the ceiling for better isolation or mounted on the wall.

The SL12-MB allows the speaker to adjust to different angles about its mounting center, after it has been either suspended from the ceiling or mounted to the wall. Locking screws are included to secure the system's final position. The SL12-MB allows the SL12-2H to be mounted at 0°, +10° or +20° to achieve the desired sound coverage.

The SL12-MB supports the SL12-2H with four 1/4 20 hex-head screws which fasten the bracket to threaded inserts preinstalled in the speaker cabinet. A set of mounting screws and shoulder washers are included with the SL12-MB kit.

Three adjustment holes allow any of three positions (0°, +10° and +20°) to be selected and locked. Aligning the adjustment screw with the hole position, sets the bracket at 0°, the next hole up is the +10° setting and the highest hole is +20°.

Mounting

To access the mounting inserts on the SL12-2H, remove the desired cap plugs depending on which mounting position is used.

For Wall Mounting: (See Figure 1)

1. Mount the SL12-MB bracket to the wall.

Caution: Due to the weight of the SL12-2H enclosure, it is imperative that the SL12-MB bracket be secured to the wall. The choice of fasteners (not provided with bracket kit) will be determined by the material and construction of the wall. It is the responsibility of the Installer to ensure the integrity of the mounting surface.

2. Install provided shoulder washer and screw in the easy mounting screw insert position about 3/4 of the way in. Also install the shoulder washer in the appropriate adjustment insert hole. (See Wall Mounting Figure 1)
3. Set the SL12-2H on the mounting bracket by sliding the mounting position screws into the easy mounting slot and guiding it into the installed position, which is all the way forward. Make sure the bracket is placed be-

tween the screw head and the shoulder washer.

4. Line up the rear locking hole with the desired adjustment angle hole and install locking screw.
5. Tighten all screws.

For Ceiling Suspension: (See Figure 1)

1. Suspend the SL12-MB bracket to the ceiling.

Caution: Due to the weight of the SL12-2H enclosure, it is imperative that the SL12-MB bracket be secured to the ceiling. The choice of fasteners (not provided with bracket kit) will be determined by the material and construction of the ceiling. It is the responsibility of the Installer to ensure the integrity of the mounting surface.

2. Install provided shoulder washer and screw in the easy mounting screw insert position about 3/4 of the way in. Also install the shoulder washer in the appropriate adjustment insert hole. (See Ceiling Suspension Figure 1)

SL12-MB Adjustable Mounting Bracket Kit

3. Set the SL12-2H on the mounting bracket by sliding the mounting position screws into the easy mounting slot and guiding it into the installed position, which is all the way to the bottom. Make sure the bracket is placed between the screw head and the shoulder washer.
4. Line up the top locking hole with the desired adjustment angle hole and install locking screw.
5. Tighten all screws.

Figure 1 illustrates how the SL12-2H is positioned on the SL12-MB bracket in the ceiling suspended position and the wall mounted position.


Uniform Limited Warranty

Electro-Voice products are guaranteed against malfunction due to defects in materials or workmanship for a specified period, as noted in the individual product-line statement(s) below, or in the individual prod-

uct data sheet or owner's manual, beginning with the date of original purchase. If such malfunction occurs during the specified period, the product will be repaired or replaced (at our option) without charge. The product will be returned to the customer prepaid. **Exclusions and Limitations:** The Limited Warranty does not apply to: (a) exterior finish or appearance; (b) certain specific items described in the individual product-line statement(s) below, or in the individual product data sheet or owner's manual; (c) malfunction resulting from use or operation of the product other than as specified in the product data sheet or owner's manual; (d) malfunction resulting from misuse or abuse of the product; or (e) malfunction occurring at any time after repairs have been made to the product by anyone other than EVI Audio Service or any of its authorized service representatives. **Obtaining Warranty Service:** To obtain warranty service, a customer

must deliver the product, prepaid, to EVI Audio Service or any of its authorized service representatives together with proof of purchase of the product in the form of a bill of sale or receipted invoice. A list of authorized service representatives is available from EVI Audio Service at 600 Cecil Street, Buchanan, MI 49107 (800/234-6831 or FAX 616/695-4743). **Incidental and Consequential Damages Excluded:** Product repair or replacement and return to the customer are the only remedies provided to the customer. Electro-Voice shall not be liable for any incidental or consequential damages including, without limitation, injury to persons or property or loss of use. Some states do not allow the exclusion or limitation of incidental or consequential damages so the above limitation or exclusion may not apply to you. **Other Rights:** This warranty gives you specific legal rights, and you may also have other rights

Figure 1—Mounting

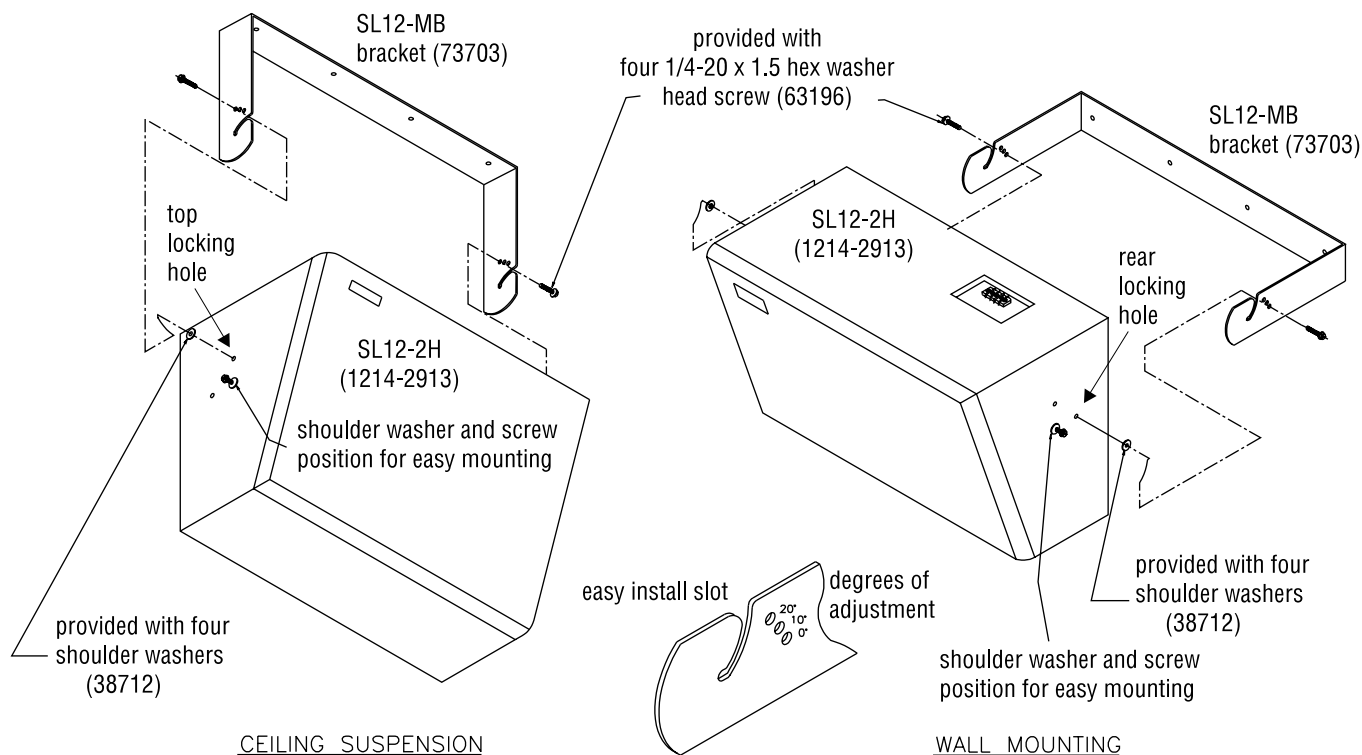

SL12-MB Adjustable Mounting Bracket Kit

which vary from state to state.

Electro-Voice Flying Hardware (including enclosure-mounted hardware and rigging accessories) is guaranteed against malfunction due to defects in materials or workmanship for a period of one (1) year from the date of original purchase. Additional details are included in the Uniform Limited Warranty statement.

For warranty repair, service information, or a listing of the repair facilities nearest you, contact the service repair department at: 616/695-6831 or 800/685-2606.

For technical assistance, contact Technical Support at 800/234-6831 or 616/695-6831, M-F, 8:00 a.m. to 5:00 p.m. Eastern Standard time.

Specifications subject to change without

notice.

Specifications

Mounting Bracket Kit:

Contains one bracket assembly, designed specifically to allow the SL12-2H to be hung from the ceiling or mounted on the wall, four shoulder washers and four 1/4-20 x 1.5 inch hex washers, head screws for securing the SL12-2H

Mounting Holes:

Four .280 inch diameter clearance holes, evenly spaced 7.25 inches apart

Enclosure Position feature:

Three position holes are provided to decrease slippage due to vibration. Provides a 0°, +10° or +20° for

alternative aiming angles

Speaker Mounting Feature:

The bracket has an easy mounting slot for simpler installations

Material:

Cold rolled steel

Finish:

Black crinkled paint

Net Weight:

2.27 kg (5.0 lb)

Shipping Weight:

2.95 kg (6.5 lb)

SL12-MB Adjustable Mounting Bracket Kit

SL2-MB Adjustable Mounting Bracket Kit

Electro-Voice®

600 Cecil Street, Buchanan, MI 49107

616/695-6831, 616/695-1304 Fax

©EVI Audio, 1997 • Litho in U.S.A.