

Converge™ Pro

Converge™ Pro 880 Professional Conferencing System

The successor to the industry-leading XAP 800. As the flagship product in ClearOne's next-generation Converge™ Pro professional audio conferencing product line, the 880 delivers rich functionality with improved audio performance, enhanced management, and simplified configuration for audio conferencing and sound reinforcement applications.

ClearOne.



THE CLEAR
CHOICE FOR
PROFESSIONAL
AUDIO
CONFERRING

CONVERGE™ PRO 880 APPLICATIONS

- Conference Rooms
- Boardrooms
- Courtrooms
- Distance Learning Facilities
- Convention Centers and Hotels
- Training Rooms
- Telemedicine Facilities
- Houses of Worship

CONVERGE™ PRO 880 ADVANTAGES

Advanced Conferencing Feature Set

- + Next-generation Acoustical Echo Cancellation
 - > Improved duplex performance
 - > Push-to-talk microphone compatibility
- + Next-generation Noise Cancellation
 - > Adaptive modeling to room ambient noise condition
- + Increased resolution on Microphone Preamp stage
 - > 0-56 dB in 7 dB increments
- + Pre-AEC routing for Sound Reinforcement Applications
 - > Maximum of 4 millisecond processing delay
- + Management Improvements
 - > Integrated Ethernet and USB connections
 - > SNMP and HTML remote management agents
 - > Event scheduler
 - > Diagnostic console
- + Simplified Configuration Software
 - > Drag & drop A/V and channel objects
 - > Selectable views—unit, matrix, channel
- + Expanded Serial Command List

Superior Audio Performance

- + Next-generation Distributed Echo Cancellation® on every mic input
- + First-mic priority delivers clear audio to the far end
- + 20 Hz-20 kHz bandwidth for full-range audio response
- + ALC & AGC keep participants' audio balanced and consistent

Configuration Flexibility


- + Scalable – link multiple Converge Pro units (880, 840T, 8I, TH20) for extensive microphone coverage and up to 16 phone lines
- + Enhanced expansion bus, featuring 12 mix-minus audio buses for routing between units
- + Eight mic gating groups (four internal & four global) allow separation of mics into individual mixer gating groups for greater configuration flexibility
- + 32 presets can be executed on-the-fly without disturbing other ongoing preset operations
- + 255 Macros for customized audio control/configuration with single command execution

Conferencing Capability

- + Link with multiple Converge Pro TH20s for up to 16-line capability
- + Also link to Converge Pro 840T, 8I, or additional 880s for more inputs and outputs

PRELIMINARY

> CONVERGE™ PRO 880 BACK PANEL

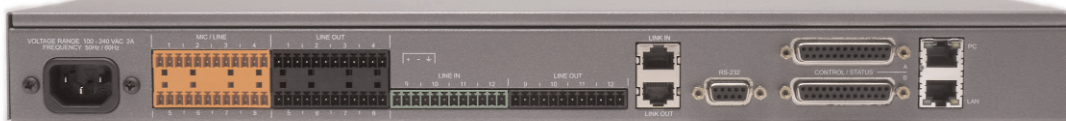

> SPECIFICATIONS



Audio Performance

Conditions: Unless otherwise specified, all measurements are performed with a 20 Hz to 20 kHz BW limit (no weighting)
 Frequency Response: 20 Hz to 20 kHz ±1 dB
 Noise (EIN): -126 dBu, 20 kHz BW, max gain, Rs=150 Ω
 THD+N: <0.02%
 Dynamic Range: 100 dB (A-weighted)
 Crosstalk <-91 dB re 20 dBu @ 20 kHz channel to channel

Auto Mixer Parameters

Number of Open Microphones (NOM)
 PA Adaptive Mode
 First Mic Priority Mode
 Last Mic Mode
 Maximum # of Mics Mode
 Ambient Level
 Gate Threshold Adjust
 Off Attenuation Adjust
 Hold Time
 Decay Rate

Matrix Mixing Parameters

36x36 matrix
 12 analog in/out
 12 expansion bus in/out
 8 assignable processing blocks in/out
 4 assignable fader blocks in/out

Assignable Processing Blocks

Filters:
 All pass
 Low pass
 High pass
 Low shelving
 High shelving
 Parametric EQ
 Notch
 CD Horn
 Crossovers:
 Bessel
 Butterworth
 Linkwitz-Riley
 Compressor
 Delay; adjustable up to 250 ms

Assignable Fader Blocks

Gain/Mute

Microphone Input Configuration

Input Gain Adjust
 Mic or Line Level
 Phantom Power on/off
 Echo Cancellation on/off
 Noise Cancellation on/off
 Filters
 All Pass
 Low Pass
 High Pass
 Notch
 PEQ



Mute on/off
 Chairman Override on/off
 AGC on/off
 Automatic Level Control on/off
 Auto Gate/Manual gate
 Adaptive Ambient on/off
 Pre AEC channel

Mic/Line Inputs 1-8

Push-on mini-terminal block, balanced, bridging
 Impedance: 5 kΩ
 Nominal Level: adjustable -56 dBu to 0 dBu (7 dB steps)
 Maximum Level: -65 dBu to +20 dBu
 Echo Cancellation: 130 ms tail time (works with 12 dB of room gain)
 Noise Cancellation: 6-15 dB attenuation
 Phantom Power: 24 V, selectable

Line Inputs 9-12

Push-on mini-terminal block, balanced, bridging
 Impedance: >10 kΩ
 Nominal Level: 0 dBu
 Maximum Level: 20 dBu

Outputs 1-12

Push-on mini-terminal block, balanced
 Impedance: 50 Ω
 Nominal Level: 0 dBu
 Maximum Level: 20 dBu

Expansion Bus In/Out

Proprietary Network
 RJ-45 (2), 115.2 kbps, 110 kΩ impedance
 Category five twisted-pair cable 100' maximum cable length between any two Converge Pro products

Ethernet

10/100 Ethernet Network Port
 10/100 Ethernet PC Port
 RJ-45 Connectors

RS-232

Serial Command Protocol Only (Console Configuration application not supported on RS-232 port)
 DB-9 female
 9,600/19,200/38,400/57,600/115,200 baud rate; 8 bits, 1 stop, no parity
 Hardware flow control on (default)/off

USB

Version 2.0 Compatible
 Type: B-connector

Control/Status

DB-25 female A/B (2)
 Inputs A/B: active low (pull to ground)
 Outputs A/B: open collector, 40 VDC max, 40 mA each
 +5 VDC pins (2) (300 mA over-current protected)

Set-up Software

Converge Console™



Power Input Range

Auto-adjusting
 100-240 VAC; 50/60 Hz

Power Consumption

TBD

Dimensions (L x D x H)

17.25" x 10.25" x 1.75"
 43.8 x 26 x 4.5 cm

Weight

TBD dry
 TBD shipping

Operating Temperature

32 to 100° F/0 to 38° C

Approvals

Pending



Optional Accessories

Converge Pro 880
 Converge Pro 8I
 Converge Pro TH20
 Tabletop Controller
 Button Microphone - Omni-Directional
 Button Microphone - Uni-Directional
 Delta Microphone
 Tabletop Microphone - Uni-Directional
 JBL Wall-Mount Speakers

Part Number

910-151-880 Converge Pro 880 - 8-channel AEC Microphone Mixer

PRELIMINARY

> CLEARONE LOCATIONS

Headquarters:
 Salt Lake City, UT USA
 1825 Research Way
 Salt Lake City, UT 84119
 Tel: 801-975-7200;
 800-945-7730
 Fax: 801-977-0087
 sales@clearone.com

Champlin, MN USA
 Tel: 763-486-1765
 sales@clearone.com

Latin America Offices
 Tel: 801-974-3621
 global@clearone.com

London, UK
 Tel: 801-974-3792
 global@clearone.com

Hong Kong
 Tel: 801-303-3441
 global@clearone.com

South Asia
 Tel: 801-303-3427
 global@clearone.com

India
 Tel: 801-303-3605
 global@clearone.com