

ET10


TELECONFERENCER




PRODUCT OVERVIEW

Finally: a teleconferencer for the phone on your desk. Speakerphones are nice, but you're often stuck with fragmented phrases. Teleconferencers are better, but they're expensive, and won't work with the phone on your desk. The ET10 delivers the sound of more expensive teleconferencers at about half the cost. And, unlike units that require a dedicated analog telephone line, the ET10 connects to most digital or analog telephones used in business—just like the phone on your desk.

The ET10 is easy to use. Simply place the telephone handset on the ET10 for two-way audio through its built-in speaker and microphone.



The ET10 is small enough to use with the phone in a cubicle

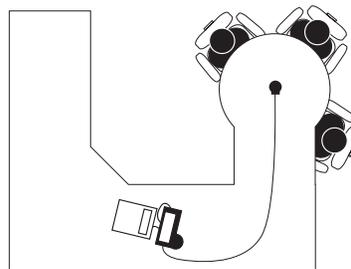

Optional Extension Microphone lets everyone be heard in the office

FEATURES/BENEFITS

- Full Duplex Audio provides natural, free flowing conversation
- Connects via Handset Cord—works with the phone on your desk without the expense of adding an additional phone line
- Allows you to use all the features of your phone (speed dial, transfer, hold, conference, etc.)
- Portable, easy to take along on business trips, conference in any location
- Headset Port—for those who prefer a headset over a handset for private conversations
- Tape Recorder Jack connects to your tape recorder for a high quality recording of your audioconference

 **Gentner**

800.945.7730
801.975.7200

ET10

TELECONFERENCER

SPECIFICATIONS

Dimensions (L/W/H)

8.75" x 7" x 2"
22.5 cm x 17.5 cm x 5 cm

Weight

1.7 lbs./.77 kg dry
2.6 lbs./1.18 kg shipping

Connectors

PHONE: 4 conductor, handset style
HANDSET: 4 conductor, handset style
REC: 2.5 mm phone jack
12 VDC IN: 2.5 mm Barrel Connector
MIC: RJ11-6

Microphone

1 directional element configured in 120° polar pattern

Speaker

2.25"/5.72 cm diameter, round,
adjustable to 80 dB SPL peak volume

Supplied Cables

13"/33.02 cm flat handset cable

Echo Cancellation

Digital echo cancellation used to eliminate acoustic (room) and telephone-line echo

Frequency Response

300Hz - 3300Hz, \pm 2.0dB

Signal to Noise Ratio

50dB

Total Harmonic Distortion

<.3%

Record Output

-10dBu, 6000hms, balanced

Controls

Volume up/down
Microphone mute
Utilizes all telephone system functions

Operating Temperature

32° to 100° F
0° to 38° C

Storage Temperature

0° to 150° F
-18° to 65° C

Electrical input

North America: 120VAC, 60Hz
United Kingdom: 220/240 VAC, 50Hz

Electrical output

North America: 12Vdc, 500mA, 6W

United Kingdom: 12Vdc, 500mA, 6W

One year limited warranty

Accessories

Several accessories are available to adapt the ET10 to a variety of applications:

- Extension Microphone
- Microphone Extension Cable
- Dual Headset
- ET10 Case
- Accessory Case
- Companion Phone

See the ET10 Accessory Datasheet for detailed information



The ET10 connects to your phone via the hand set cord as shown above.



Gentner Communications Corporation
1825 Research Way
Salt Lake City, UT 84119 USA

800.945.7730

801.975.7200

Fax: 801.977.0087

<http://www.gentner.com>

Try our conference call service:
1-800-LETS MEET

Send this document to any fax machine with Gentner's Fax-On-Demand: 800.695.8110 Doc. #1002

WE PUT THE WORLD ON SPEAKING TERMS™

©1997 Gentner Communications Corporation. Printed in USA, 12/97. Features, specifications, and descriptions are accurate as of this printing. Gentner reserves the right to modify this information without prior notice or obligation.