

# V-There™ ~ Quick Start Guide




## To Connect the V-There

Make the appropriate connections for your application based on the diagram below. For more information, consult the V-There Installation and Operation Manual.

Refer to page 2 for a list of cables included with your V-There system.

V-There 2200 depicted; V-There 2100 features one ISDN port. The V-There 2000 does not have ISDN capability.

NT-1 adapters are not included with the V-There.

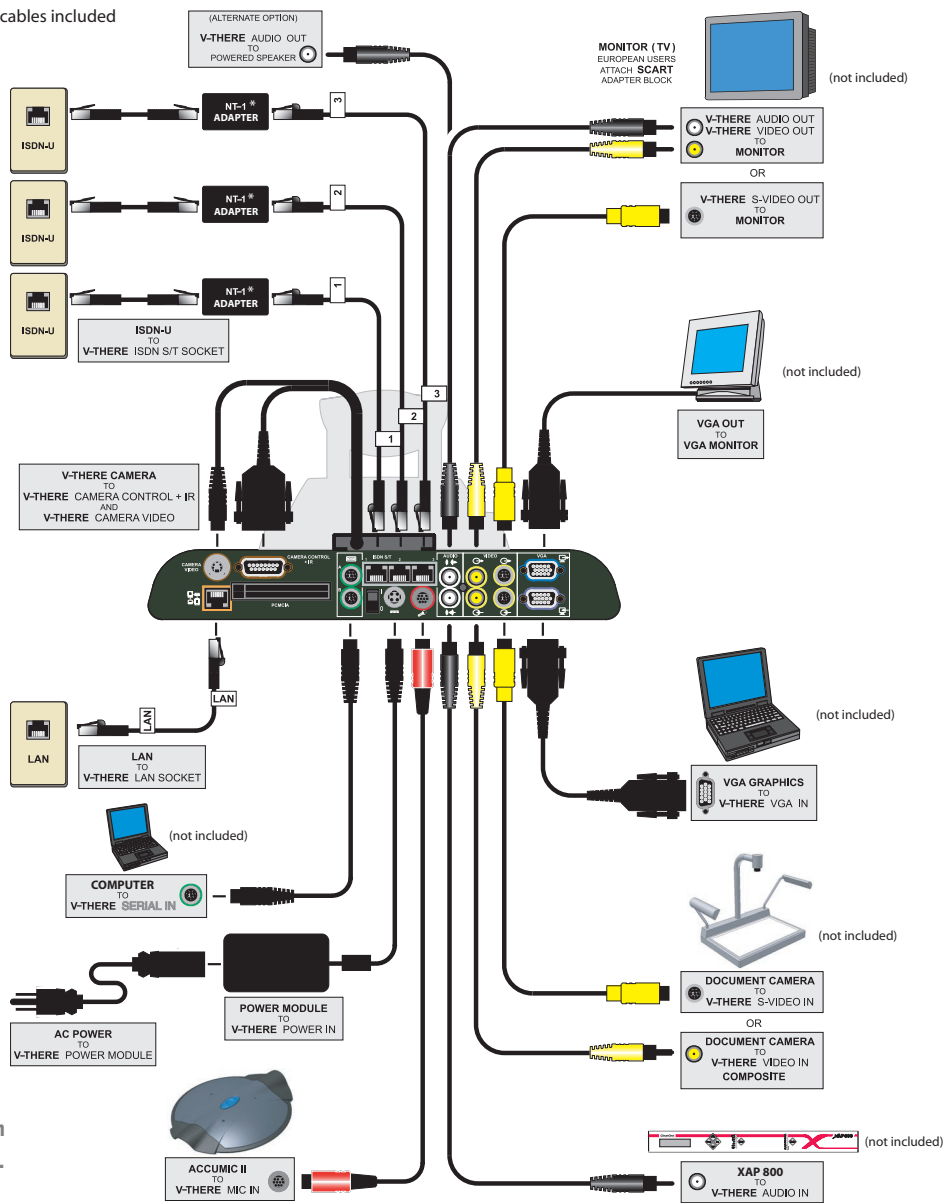

V-There connection diagram.

\*V-There features an S/T interface, which requires an optional NT-1 adapter for use with ISDN-U lines. You can purchase NT-1 adapters through your ClearOne distributor.

## Cables included with V-There

Power cord	699-150-006
ISDN (three w/V-There 2200, one w/V-There 2100)	830-170-011, 830-170-012, 830-170-013
Black Ethernet (LAN)	830-170-001
Yellow/black dual phono	830-170-124
Serial	830-170-123
AccuMic II cable assembly	830-156-002
Camera extension	830-170-132
S-video	830-170-020
S-video camera extension	830-170-136
VGA extension	830-170-133

If you are missing any cables, please contact the ClearOne Technical Services Group at 1-800-283-5936 (USA) or 1-801-974-3760.

### Configuring V-There

After making all connections, turn on the V-There's power switch on the rear panel and follow the procedures outlined in the onscreen configuration wizard to establish system settings. These settings include language, date, time, LAN options, ISDN options, and video and audio preferences.


You do not need to complete every step in the configuration wizard to begin using your V-There. For example, if you choose to use your ISDN connection in the configuration wizard, and will not be connecting the unit to a LAN, you do not need to complete the configuration screens for the network (LAN) setup.

After you complete the configuration wizard, you can make subsequent adjustments in the Expert Mode of the user interface. See the V-There Installation and Operation Manual for more information about the Expert Mode and for information about system settings.

To Make a Video Call



1.

Press the Call button to open the Phone Directory.

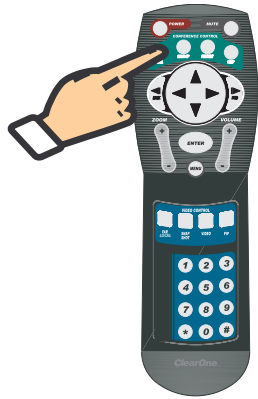

2.

Manual Dial is selected by default. Press Enter to open the Manual Dial window.

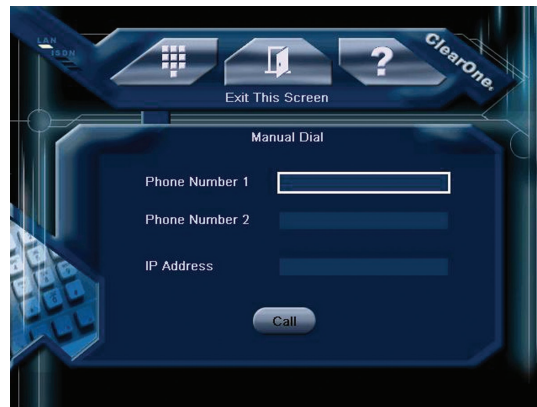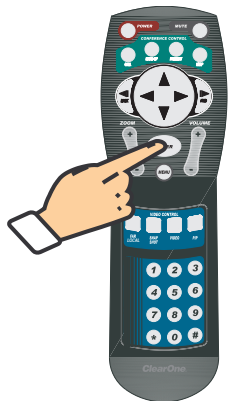

3.

Enter the phone number(s) or IP address, then press Enter. The V-There dials the call, and upon connection, the video image of the far end is displayed.



Press the Hang-Up button to terminate the call.







## To Change Camera Position



1.

If the onscreen interface is displayed, press the Menu button to remove it (either the local or remote camera view will then be displayed).

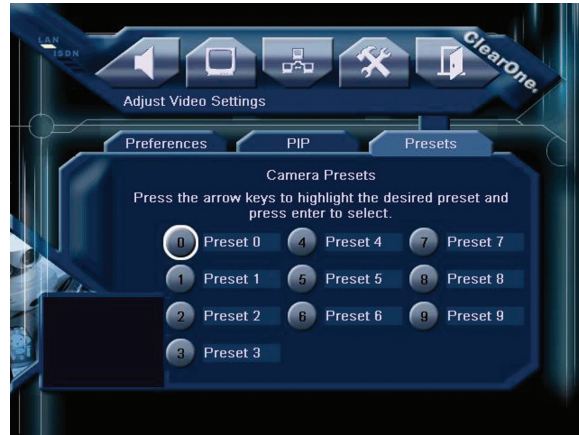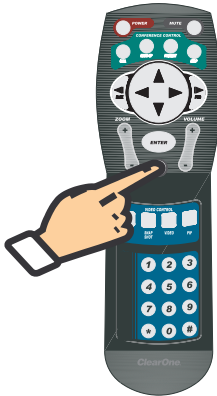


2.

Use the Far/Local button to select the camera you want to position (either the far-end or local camera).

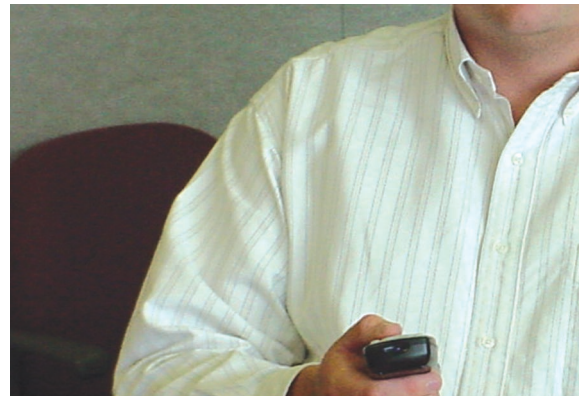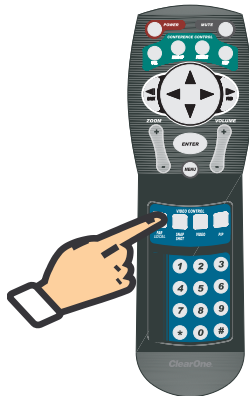

3.

Press the arrow and Zoom buttons to establish the appropriate image position and magnification.

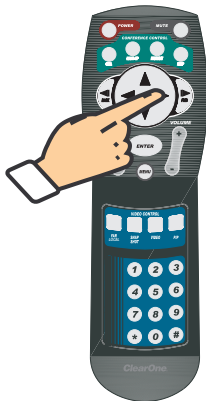

Consult the V-There Installation and Operation Manual for more information about configuring and using V-There.