


International Uninterruptible Power Managers “D” Case Enclosure

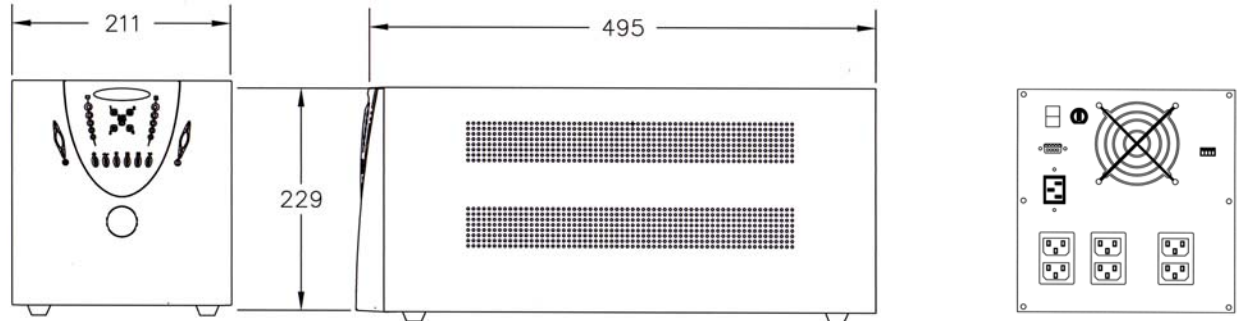

	UPM-1100INT Part # - 55110-03E	UPM-1440INT Part # - 55144-03E
Type	Standard	Standard
VA Rating	1100	1440
Watt Rating	715	936
Inverter Waveform	Low distortion sine wave	Low distortion sine wave
Transfer time	4 ms. typical	4 ms. typical
Frequency	50 Hz.	50 Hz.
BTU/Hr. Output	225	250
T.H.D. Max. %	<3% on battery	<3% on battery
On Line Efficiency	94%	94%
Input Voltage	230	230
Input Current	5.2 amps	6.7 amps
Output Voltage	230	230
Output Current	4.8 amps	6.3 amps
Input Voltage Range Without Using Battery	181 –290 volts	181 –290 volts
Output Regulation (on line)	± 10%	± 10%
Output Regulation (on battery)	± 5%	± 5%
Backup time (full/half load)	6/20 minutes	6/20 minutes
Wall mountable	Yes	No
Communications Interface	DB9	DB9
Safety Agency Listing	VDE, CE Mark	VDE, CE Mark
Shipping Weight (kg.)	29	29

Front Panel Controls

- Power On/Off
- Test
- Load Level LED Gauge
- Battery Charge LED Gauge
- Output receptacle status
- Voltage Manager Boost LED
- Voltage Manager Nominal LED
- Voltage Manager Buck LED
- On Battery LED
- Replace Battery LED
- Overload LED

Rear Panel Information and Controls

- IEC320 Inlet Module
- Six (6) IEC320 receptacles controllable via Communications Manager software in three groups
- Configuration Manager DIP switches
- Communications Manager DB9 port*
- Circuit Breaker
- Start Manger Enable switch (to allow cold starting UPM on internal battery when no AC power is present)

Internal Batteries

- User hot-swappable (see instruction manual)
- Type - 12 volt, 11 amp-hour (1100 VA)
12 volt, 7 amp-hour (1440 VA)
- Quantity - 2 pieces (1100 VA), 4 pieces (1440 VA)
- Recharge time - 4 hours

Environmental

- Temperature - 0 - +40⁰ C (32 - 104⁰F) Operating
-20 - +60⁰ C (-40 - +140⁰ F) Shipment, Storage
- Humidity - 5 - 90% non-condensing (Operating, Shipment, Storage)
- Altitude - 3,000m (10,000 ft.) max. (Operating, Shipment, Storage)

NOISE REJECTION-ISOLATION: With unit under power and an ANSI/IEEE C62.41Cat. A pulse applied either normal or common mode at the input, the noise output voltage will be less than 10V normal mode and less than 0.5V common mode in all four quadrants (CM-NM, NM-NM, CM-CM, NM-CM).

SURGE VOLTAGE WITHSTAND CAPABILITY: Tested under power to ANSI/IEEE C62.41 Cat. A & B (formerly IEEE587-1980). Cat. A - 6000V @ 200 amps, 0.5 usec risetime, 100 kHz decay, Cat. B - 6000V @ 500 amps, 0.5 usec risetime, 100 kHz decay.

Warranty/Support: ETA Systems warrants the electronics and transformers used in its uninterruptible power managers to be free from defects in materials and workmanship for a period of five years from the date of shipment. Batteries are warranted for a period of two years from the date of shipment. For service or support on any ETA Systems product, please contact ETA Systems Technical Support at (800) 321-3388.