

CONDITIONED POWER DISTRIBUTION 10 AMP PRO SERIES - CE APPROVED



PD11LVIEC



PD10VIEC



PD11LIEC



PD10IEC



PDLOIEC

ETA's line of *Conditioned Power Distribution* units are designed to reduce damage to sensitive electronic equipment from sudden voltage spikes, damaging power surges, and EMI/RFI noise, which is inherent in utility power lines.

Power line sources which are not preconditioned or filtered can affect reliable operation of sensitive audio, computer, and other electronic equipment, and may cause premature failure, expensive repairs, or unanticipated replacement from non-repairable damage.

ETA QUALITY STANDARD FEATURES:

- Incoming power spike and surge protection & noise filtration
- One rack space high
- One year limited warranty
- CE compliant

APPLICATIONS:

- Live Productions
- Sound Reinforcement
- Permanent Installations
- Recording Studios
- Theatres
- Clubs
- Schools
- Churches
- Board Rooms
- Audio-Visual Multi-use Presentation Rooms
- Tours
- Bands, DJs
- A-V Racks
- Computer Networks
- Home Entertainment Centers

PD10IEC FEATURES:

- 10 amps, 2300 watt capacity per unit
- Ten rear panel 10-amp outlets
- Lighted power "ON/OFF" switch
- Circuit breakers located on front panel
- Spike and surge protection
- EMI/RFI filtration

PD10VIEC SPECIAL FEATURES:

- Plus a digital voltmeter readout

PD11LIEC SPECIAL FEATURES:


- Plus dual swivel rack high output illuminators with HIGH/LOW settings
- Plus a protected "always on" 10 amp AC power outlet on the front panel
- Front panel "HIGH/LOW" light switch

PD11LVIEC SPECIAL FEATURES:

- Plus a digital voltmeter readout
- Plus dual swivel rack high output illuminators with HIGH/LOW settings
- Front panel "HIGH/LOW" light switch
- Plus a protected "always on" 10 amp AC power outlet on the front panel

PDLOIEC SPECIAL FEATURES:


- Dual swivel rack high output illuminators with HIGH/LOW settings



ETA[®] SYSTEMS

The Power Just Keeps On Coming

MODELS PD10IEC / PD10VIEC / PD11VIEC / PD11LVIEC / PDLOIEC - Lights Only

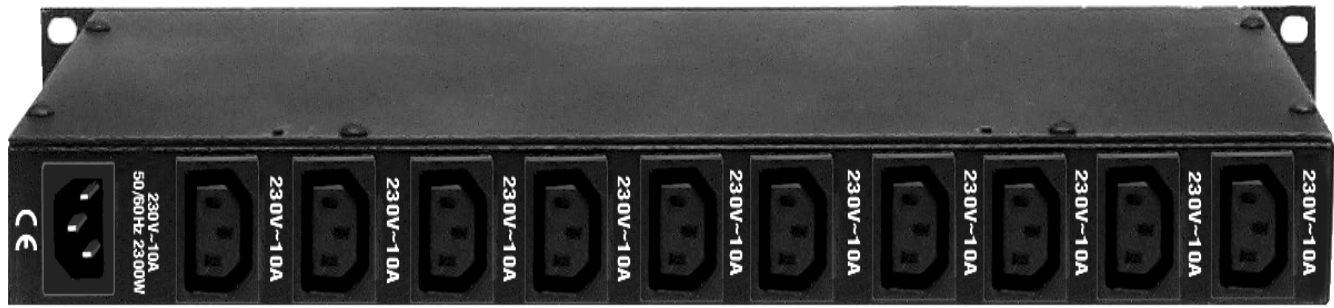

IEC320



PDLOIEC - Lights Only

SPECIFICATIONS:

Dimensions	19" L x 10" D x 1 3/4" H
Weight	7 lbs.
Housing Quality	Black powder coated chassis, black anodized aluminum front panel
Electrical	230V, 50Hz, single phase
Max. amps	10/unit
Max. watts	2300/unit
Max. front outlet	10 amps
Spike/surge protection	Line to neutral, neutral to ground, line to ground
Clamping level	400V peak
Response time	1 nanosecond
Max. surge voltage	6000V
Max. surge current	12,000 amps
Max. spike energy	450 joules total
Noise attenuation	Transverse > 20 dB, 1.5 kHz to 200 mHz
Certification	CE compliant

PRO SERIES FEATURES

- 10 amp, 2300 watt capacity per unit
- Ten rear panel 10-amp outlets
- Protected "always on" 10 amp front outlet
- Spike, surge protection
- EMI/RFI filtration
- 1 rack space
- 1 year limited warranty

PD10VIEC SPECIAL FEATURES

- Digital voltage display

PD11LVIEC SPECIAL FEATURES

- Rack illuminators
- Front panel "High/Low" switch

PD11LVIEC SPECIAL FEATURES

- Rack illuminators
- Front panel "High/Low" switch
- Digital voltage display

PDLOIEC - LIGHTS ONLY FEATURES

- Rack illuminators

ETA[®] SYSTEMS

A Creative Light & Sound Company

Division of National Biological Corporation

1532 Enterprise Parkway, Twinsburg, Ohio 44087 USA


330-425-3388 • 800-321-6699 • Fax: 330-425-9700

<http://www.etasys.com> E-mail eta@etasys.com


All designs and specifications are subject to change without notice.
Copyright © 1999 ETA Systems.

4/99


5FP-023-LIT



MODELS PD10IEC / PD10VIEC / PD11VIEC / PD11LVIEC / PDLOIEC - Lights Only

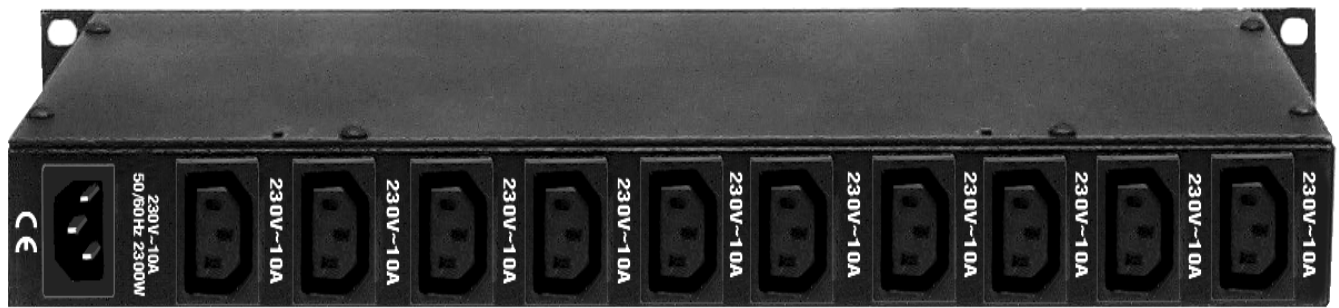

IEC320

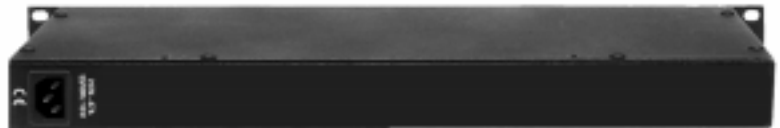

PDLOIEC - Lights Only

SPECIFICATIONS:

Dimensions	19" L x 10" D x 1 3/4" H
Weight	7 lbs.
Housing Quality	Black powder coated chassis, black anodized aluminum front panel
Electrical	230V, 50Hz, single phase
Max. amps	10/unit
Max. watts	2300/unit
Max. front outlet	10 amps
Spike/surge protection	Line to neutral, neutral to ground, line to ground
Clamping level	400V peak
Response time	1 nanosecond
Max. surge voltage	6000V
Max. surge current	12,000 amps
Max. spike energy	450 joules total
Noise attenuation	Transverse > 20 dB, 1.5 kHz to 200 mHz
Certification	CE compliant

PRO SERIES FEATURES

- 10 amp, 2300 watt capacity per unit
- Ten rear panel 10-amp outlets
- Protected "always on" 10 amp front outlet
- Spike, surge protection
- EMI/RFI filtration
- 1 rack space
- 1 year limited warranty

PD10VIEC SPECIAL FEATURES

- Digital voltage display

PD11LVIEC SPECIAL FEATURES

- Rack illuminators
- Front panel "High/Low" switch

PD11LVIEC SPECIAL FEATURES

- Rack illuminators
- Front panel "High/Low" switch
- Digital voltage display

PDLOIEC - LIGHTS ONLY FEATURES

- Rack illuminators

ETA[®] SYSTEMS

A Creative Light & Sound Company

Division of National Biological Corporation

1532 Enterprise Parkway, Twinsburg, Ohio 44087 USA

330-425-3388 • 800-321-6699 • Fax: 330-425-9700

<http://www.etasys.com> E-mail eta@etasys.com

All designs and specifications are subject to change without notice.
Copyright © 1999 ETA Systems.

4/99

5FP-023-LIT

