



CONDITIONED POWER DISTRIBUTION 15 AMP SERIES

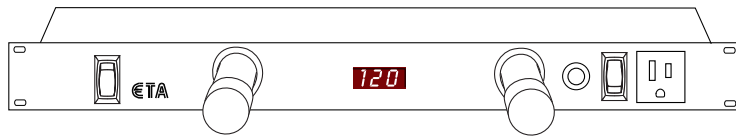

PD11LV

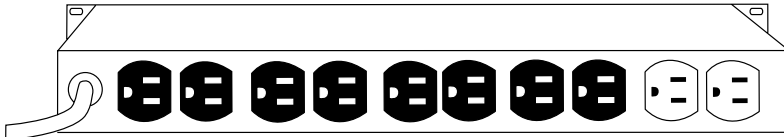

BACK
PANEL

PD11LV SPECIAL FEATURES:

- 10 protected u-grounded power outlets, 8 switched, 2 "always on"
- Four dual 15 amp U-grounded outlets on back panel
- One "always on" dual 15 amp U-grounded outlet on back panel
- Protected "always on" 15 amp AC power outlet on the front panel
- Full 120 volt, 15 amp, 1800 watt capacity per unit
- 14-gauge 3-prong 6' power cord
- Total unit 15 amp outlet circuit breaker located on front panel
- Spike and surge protection
- EMI/RFI filtration
- Digital voltmeter readout
- Dual swivel rack high output rack illuminators with High/Low settings and easy-to-change bulb accessibility

Why You Need Conditioned Power:


With present demands on power utilities, voltage spikes, power surges, electrical noise, and power failures are commonplace. This "garbage" in the power delivered can reduce the fidelity of audio systems, cause premature failure, or result in extensive damage or destruction of electronic equipment.

PROTECT YOUR INVESTMENT with ETA Systems Conditioned Power units featuring EMI/RFI filtration, spike/surge/sag/ protection, voltage regulation, and sequential, timed power turn-on.

ETA QUALITY STANDARD FEATURES:

- Incoming power spike and surge protection & noise filtration on all 3 legs of incoming power
- One rack space high
- Three year limited warranty
- ETL listed


Easy 4-step bulb replacement



Use a 120 volt 4 watt bulb (Christmas tree bulb)


1. Twist cap clockwise
2. Release bulb & socket
3. Replace bulb
4. Replace socket, turn cap counter-clockwise

PD11LV SPECIFICATIONS:

Dimensions	19" L x 7 1/2" D x 1 3/4" H
Weight	7 lbs.
Housing Quality	Black powder coated chassis
Electrical	120V, 50/60 Hz, single phase
Max. amps	15/unit
Max. watts	1800/unit
Spike/surge protection	Line to neutral, neutral to ground, line to ground
Response time	< 1 nanosecond
Max. clamping voltage	330V
Max. spike current	6500 amps
Max. surge energy	630 joules total
Noise filter (EMI/RFI)	Frequency 150 kHz -200 MHz Attenuation up to 20 dB
Certification	ETL Listed, tested to UL 1419 

All designs and specifications are subject to change without notice.

5FP-045-LIT 5/01



ETA SYSTEMS

The Power Just Keeps On Coming

1532 Enterprise Pkwy, Twinsburg, Ohio 44087 USA • 800-321-6699 • Fax: 330-425-9700 • www.etasys.com