




CONDITIONED POWER DISTRIBUTION 20 AMP PRO SERIES MODELS SEQUENTIAL POWER UP/POWER DOWN

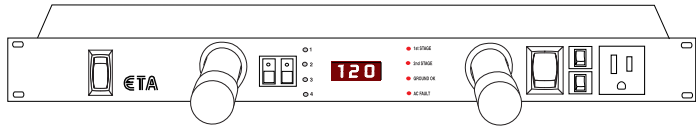

PD11LVSP



PD11SSP

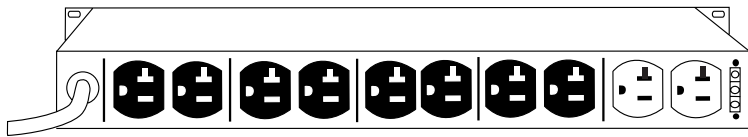


BACK
PANEL

Why You Need Conditioned Power:

With present demands on power utilities, voltage spikes, power surges, electrical noise, and power failures are commonplace. This "garbage" in the power delivered can reduce the fidelity of audio systems, cause premature failure, or result in extensive damage or destruction of electronic equipment.

PROTECT YOUR INVESTMENT with ETA Systems Conditioned Power units featuring EMI/RFI filtration, spike/surge/sag/ protection, voltage regulation, and sequential, timed power turn-on.

Easy 4-step bulb replacement



Use a 120 volt 4 watt bulb (Christmas tree bulb)

1. Twist cap clockwise
2. Release bulb & socket
3. Replace bulb
4. Replace socket, turn cap counter-clockwise

ETA QUALITY STANDARD FEATURES:

- Incoming power spike and surge protection and noise filtration on all 3 legs of incoming power
- One rack space high
- Three year limited warranty
- ETL listed

Power cord
requires
20 amp
receptacle



PD11LVSP/PD11SSP FEATURES:

- Microprocessor monitored sequential power distribution system
- Four power up/down steps or stages of distributed and conditioned power
- Four pre-set power up/down intervals of 1, 5, 10 or 30 seconds
- Optional manual setting for up to 240 seconds between intervals
- One dual 20 amp U-grounded outlet per stage
- One "always on" dual 20 amp U-grounded outlet on back panel
- Full 120 volt, 20 amp, 2400 watt capacity per unit
- 12-gauge, 3-prong, 10-foot power cord, 20-amp capacity
- Protected "always on" 15 amp AC power outlet on the front panel
- Total unit 20 amp and 15 amp outlet circuit breakers located on front panel
- Three-stage spike and surge protection
Stage 1: surge suppression protection
Stage 2: metal oxide varistors (MOVS)
Stage 3: gas discharge tube
- Two-stage EMI/RFI filtration
- Ground and AC line fault check


REMOTE OPERATION:


- External three-pin screw terminal block for simple three-wire hook-up is located on rear panel. Connection requires user provided ON/OFF switch and L.E.D. indicator.

PD11LVSP SPECIAL FEATURES:

- Plus digital voltmeter readout
- Plus dual swivel rack high output illuminators with HIGH/LOW settings and easy bulb change accessibility

PD11LVSP AND PD11SSP SPECIFICATIONS:

Dimensions	19" L x 10" D x 1 3/4" H
Weight	10 lbs.
Housing Quality	Black powder coated chassis, black anodized aluminum front panel
Electrical	120V, 50/60 Hz, single phase
Max. amps	20/unit
Max. watts	2400/unit
Max. front outlet	15 amps
Spike/surge protection	Line to neutral, neutral to ground, line to ground
Clamping level	200V peak
Response time	1 nanosecond
Max. surge voltage	6000V
Max. surge current	26,000 amps
Max. spike energy	630 joules total
Noise attenuation	Transverse > 20 dB, 1.5 kHz to 200 mHz
Certification	ETL listed 



ETA SYSTEMS

All designs and specifications are subject to change without notice.

5FP-070-LIT 5/01

The Power Just Keeps On Coming

1532 Enterprise Pkwy, Twinsburg, Ohio 44087 USA • 800-321-6699 • Fax: 330-425-9700 • www.etasys.com