



CONDITIONED POWER DISTRIBUTION 15 AMP SERIES

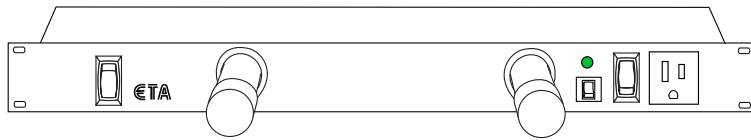

PD9L

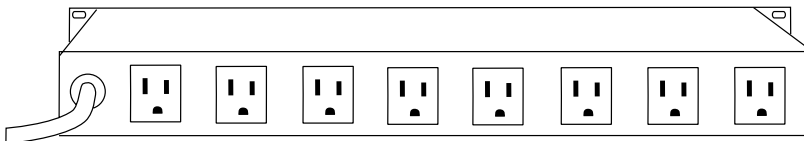

BACK
PANEL

PD9L SPECIAL FEATURES:

- 9 protected U-grounded AC power outlets (8 on rear panel, 1 on front panel)
- 8 vertical rear panel outlets spaced to accommodate up to 6 AC adapters without compromising outlets
- Full 120 volt, 15 amp, 1800 watt output
- 14-gauge 3-prong 6' power cord
- 15 amp input- breaker protected
- Spike and surge protection
- EMI/RFI filtration
- High output, dual swivel rack illuminators on PD9L with High/Low settings and "easy change" bulb
- Watchdog protected circuitry with front panel LED indicator noting "Go" or "No Go" protection status

Why You Need Conditioned Power:


With present demands on power utilities, voltage spikes, power surges, electrical noise, and power failures are commonplace. This "garbage" in the power delivered can reduce the fidelity of audio systems, cause premature failure, or result in extensive damage or destruction of electronic equipment.

PROTECT YOUR INVESTMENT with ETA Systems Conditioned Power units featuring EMI/RFI filtration, spike/surge/sag/ protection, voltage regulation, and sequential, timed power turn-on.

ETA QUALITY STANDARD FEATURES:

- Incoming power spike and surge protection & noise filtration on all 3 legs of incoming power
- One rack space high
- Three year limited warranty

Easy 4-step bulb replacement



Use a 120 volt 4 watt bulb (Christmas tree bulb)


1. Twist cap clockwise
2. Release bulb & socket
3. Replace bulb
4. Replace socket, turn cap counter-clockwise

PD9L SPECIFICATIONS:

Dimensions	19" L x 7 1/2" D x 1 3/4" H
Weight	8 lbs.
Housing Quality	Black powder coated chassis
Electrical	120V, 50/60 Hz, single phase
Max. amps	15/unit
Max. watts	1800/unit
Max. front outlet	15 amps
Spike/surge protection	Line to neutral, neutral to ground, line to ground
Response time	1 nanosecond
Max. surge voltage	6000V
Max. surge current	12,000 amps
Max. spike energy	450 joules total
Noise attenuation	Transverse > 35 dB, 1.5 kHz to 200 mHz

All designs and specifications are subject to change without notice.

5HOU-007-LIT 5/01



ETA SYSTEMS

The Power Just Keeps On Coming

1532 Enterprise Pkwy, Twinsburg, Ohio 44087 USA • 800-321-6699 • Fax: 330-425-9700 • www.etasys.com