


North American Power Conditioners - "A" Case Enclosure

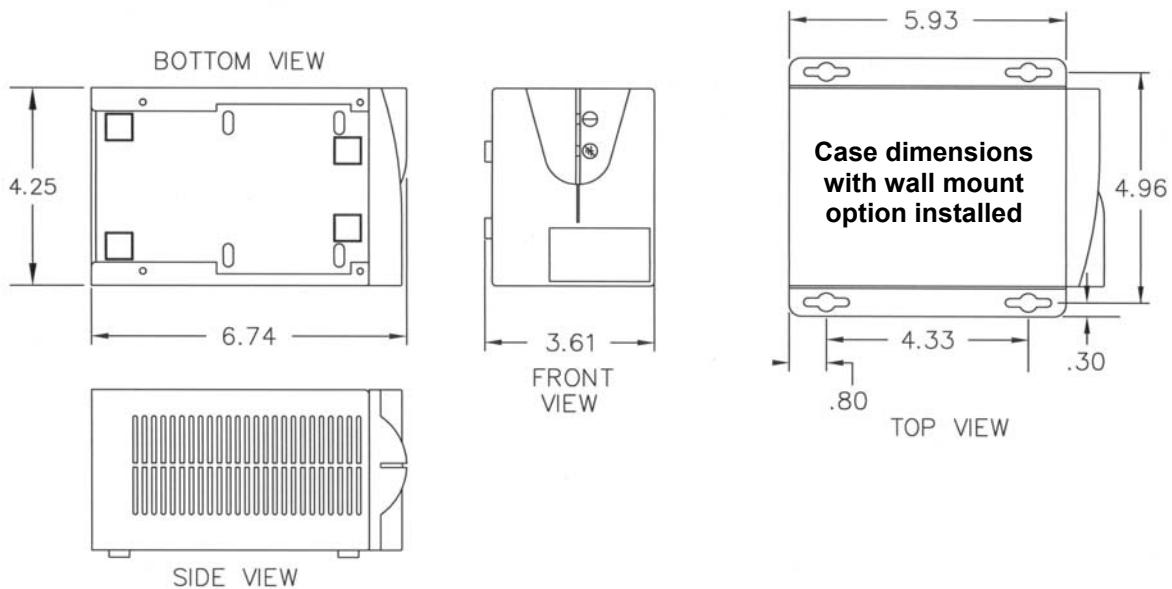

	PCI-065NA* Part # E61008-XX**R	PCI-100NA* Part # E61012-XX**R
VA Rating	78	120
Frequency	60 Hz.	60 Hz.
BTU/Hr. Output	27	41
T.H.D. % Added	<1%	<1%
Load Surge Current @		
1/2 cycle	10 amps	15 amps
1 second	3.6 amps	5.2 amps
10 seconds	2.0 amps	3.0 amps
Input Voltage	120	120
Output Voltage	120	120
Output Current	.65 amps	1.0 amps
Efficiency	90%	90%
Voltage Drop No Load to Full Load	10%	10%
Wall mountable*	Yes	Yes
Compliance	UL and cUL, RoHS	UL and cUL, RoHS
Shipping Weight (lbs.)	5	6

* When ordering by model number, add "W" to model number above for wall mount option.

NOISE REJECTION-ISOLATION: With unit under power and an ANSI/IEEE C62.41Cat. A pulse applied either normal or common mode at the input, the noise output voltage will be less than 10V normal mode (-60 db) and less than 0.5V common mode (greater than -80 db from 1 Hz to 5 MHz) in all four quadrants (CM-NM, NM-NM, CM-CM, NM-CM) .

SURGE VOLTAGE WITHSTAND CAPABILITY: Tested under power to ANSI/IEEE C62.41 Cat. A & B (formerly IEEE587-1980). Cat. A - 6000V @ 200 amps, 0.5 usec risetime, 100 kHz decay, Cat. B - 6000V @ 500 amps, 0.5 usec risetime, 100 kHz decay.


North American Standard Conditioners - "A" Case Enclosure Available Plug/Receptacle Options

ETA Systems Part #
PCI-065NA - E61008-XXR**
PCI-100NA - E61012-XXR**

When ordering by part number, add two digit number from below in place of **XX to specify receptacle option desired.


Option 1 - Standard Plugs/Receptacles

- 01 - 5-15P plug and one 5-15R duplex
- 21 - 5-15P plug and one 5-15R duplex with wallmount



Option 2 - Twistlock Plugs/Receptacles

- 41 - L5-15P plug and one L5-15R duplex



Warranty/Support: ETA Systems warrants its power conditioners against defects in materials and workmanship for a period of five years from the date of shipment. For service or support on any ETA Systems product, please contact ETA Technical Support at (800) 321-6699.