


465 AES/EBU & Optical S/PDIF Audio Transcoder



FEATURES

- **Bi-directional Format Conversion** - AES/EBU to Toslink® S/PDIF audio and Toslink® S/PDIF audio to AES/EBU audio simultaneously.
- **Sampling Rates** - up to 96kHz.
- **Compact Size** - Part of the Kramer TOOLS™ family of compact, high quality and cost effective solutions.

The **465** is a transcoder for AES/EBU and optical S/PDIF digital audio signals. It simultaneously converts AES/EBU to optical S/PDIF digital audio signals and optical S/PDIF to AES/EBU digital audio signals.

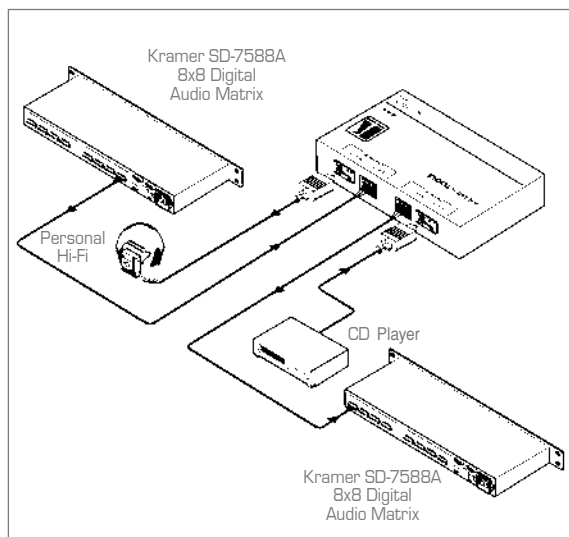

TECHNICAL SPECIFICATIONS

- INPUTS/OUTPUTS:** Electrical: transformer coupled 110Ω AES/EBU on detachable terminal blocks.
Optical: Toslink® conforming to EIAJ standard CP-1201.
- SAMPLING:** 32, 44.1, 48, 96kHz sampling frequencies.
- DIMENSIONS:** 12cm x 7.5cm x 2.5cm (4.7" x 2.95" x 0.98", W, D, H).
- POWER SOURCE:** 12VDC, 60mA.
- WEIGHT:** 0.25kg. (0.6lbs.) approx.
- ACCESSORIES:** Power supply, mounting bracket.
- OPTIONS:** RK-T1, RK-T3, 19" rack adapters.

