


611T/611R Composite Video over Fiber Optic Transmitter & Receiver

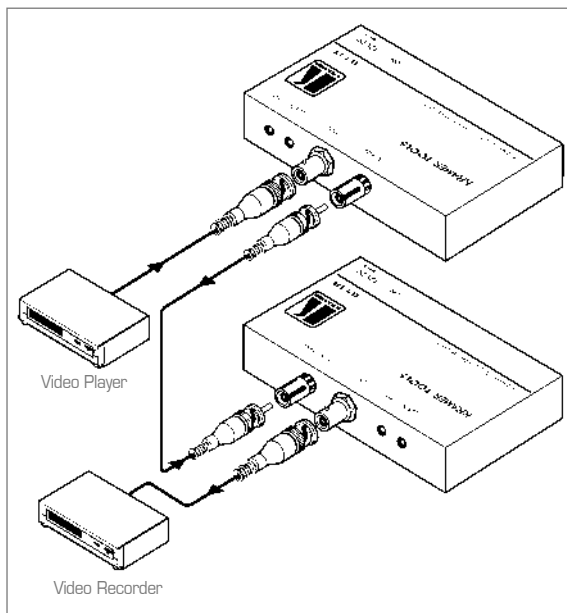

The **611T** and **611R** are a high performance fiber optic transmitter and receiver for composite video signals. The **611T** transmitter converts a composite video signal into a fiber optic signal and the **611R** receiver will convert the fiber optic signal back into a composite video signal.

FEATURES

- **Level (Gain) and EQ (Peaking) Controls (611T & 611R).**
- **Multi-Mode** - 5km (3.1 miles).
- **Compact Size** - Part of the Kramer TOOLS™ family of compact, high quality and cost effective solutions.

TECHNICAL SPECIFICATIONS

	611T	611R
INPUT:	Composite video, 1Vpp/75Ω on a BNC connector.	Optic Fiber ST connector.
OUTPUT:	Optic Fiber ST connector.	Composite Video 1Vpp/75Ω on a BNC connector.
OPERATION DISTANCE:	Up to 5km (MultiMode).	
VIDEO BANDWIDTH (-3dB):	55MHz.	
DIFF. GAIN:	0.4%.	
VIDEO S/N RATIO:	60dB.	
NON-LINEARITY:	0.6%.	
POWER SOURCE:	12VDC 80mA.	
DIMENSIONS:	12cm x 7.5cm x 2.5cm (4.7" x 2.95" x 0.98", W, D, H).	
WEIGHT:	0.27kg. (0.59lbs.) approx.	
ACCESSORIES:	Power supply, mounting bracket.	
OPTIONS:	RK-T1, RK-T3, 19" rack adapters.	

