


901 2 Channel Personal Stereo Audio Amplifier



The **901** is a high performance integrated personal stereo amplifier for unbalanced stereo signals. It accepts a stereo audio signal and delivers a speaker output of 2 watts RMS power per channel into a 4 ohm load.

FEATURES

- **S/N Ratio** - 74dB.
- **Inputs** - Line or microphone (condenser or dynamic selectable).
- **Outputs** - 3.5mm for headphones and terminal block connectors for speakers.
- **Control** - Volume, bass, treble, and balance.
- **Compact Size** - Part of the Kramer TOOLS™ family of compact, high quality and cost effective solutions.

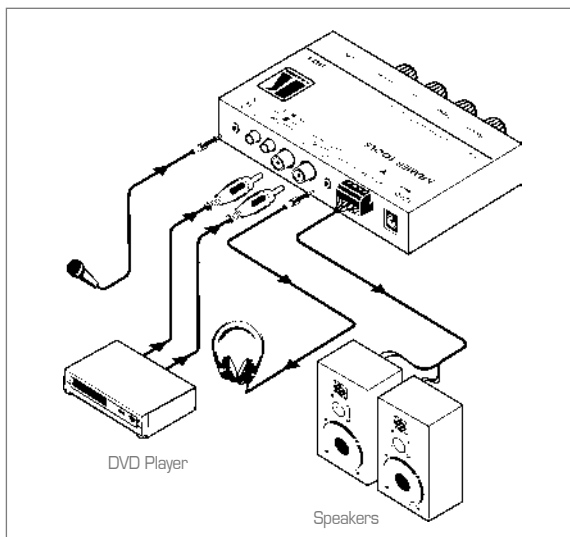

TECHNICAL SPECIFICATIONS

INPUTS:	1 line stereo, 1Vpp/50k Ω on RCA connectors. 1 mic mono, 5mV/3.2k (condenser) 4.8k (dynamic) with a type selector, on a 6.5mm socket.
OUTPUTS:	Audio stereo 2W/4 Ω /channel on both 3.5mm mini phone connector and 4-pole detachable terminal block.
MAX. OUTPUT LEVEL:	8Vpp at Hi-Z load (headphones).
BANDWIDTH (-3dB):	37kHz.
S/N RATIO:	74dB.
CONTROLS:	Input selector switch, Bass +/- 10dB @ 100Hz, Treble +/- 12dB @ 10kHz, Volume, Balance.
COUPLING:	AC.
AUDIO THD + NOISE:	0.06%.
AUDIO 2nd HARMONIC:	0.004%.
CROSSTALK:	-60dB @ 1kHz, 20kHz.
POWER SOURCE:	12VDC, 60mA.
DIMENSIONS:	12cm x 7.5cm x 2.5cm (4.7" x 2.95" x 0.98") W, D, H.
WEIGHT:	0.3kg. (0.66lbs.) approx.
ACCESSORIES:	Power supply, mounting bracket.
OPTIONS:	RK-T1, RK-T3 19" rack adapters.