



1:8 Audio Distributor

80A

The KRAMER **80A** is a Broadcast quality, state-of-the art *Balanced Stereo Audio Distribution Amplifier* designed for demanding applications, such as broadcast and production studios. The **80A** has two balanced stereo audio inputs, each splitting the input source into four identical outputs. The **80A** can function as a 1:8 DA or as two 1:4 DAs. It has trimmers on the front panel to fine tune the levels of each channel individually. Units in the 80 series come in a convenient, compact size enclosure. Any two units will fit side by side in a 19 inch rack, and a special 1U rack adapter is available for that purpose.

Some features and applications:

- ❖ Audio duplication studios, delivering Audio duplicates of undiminished quality.
- ❖ Audio production studios for source mastering.
- ❖ Broadcast studios for on-line signal distribution.

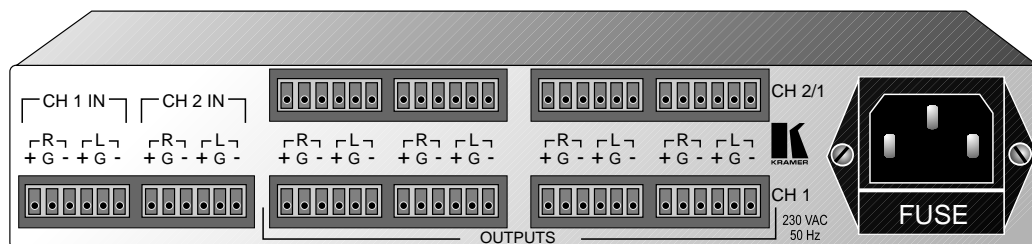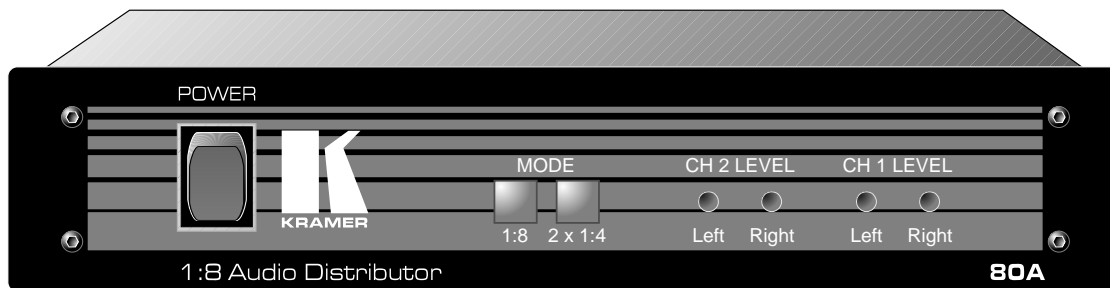

Technical Specifications:

INPUTS:	2 Audio Stereo Balanced +4dBm, 100 k Ω on Terminal Block connectors.
OUTPUTS:	2 x 4 Audio Stereo Balanced, +4dBm, 49 Ω on Terminal Block connectors.
AUDIO BANDWIDTH:	20 kHz. -1dB.
COUPLING:	AC.
THD+NOISE:	Less than 0.02%.
CROSSTALK:	-60dB.
S/N RATIO:	-100dB /1V.
MAX. AUDIO OUTPUT:	20 Vpp.
POWER SOURCE:	230 VAC, 50/60 Hz (115VAC U.S.A.)
DIMENSIONS:	22cm X 18cm X 4.5cm (W, D, H.)