
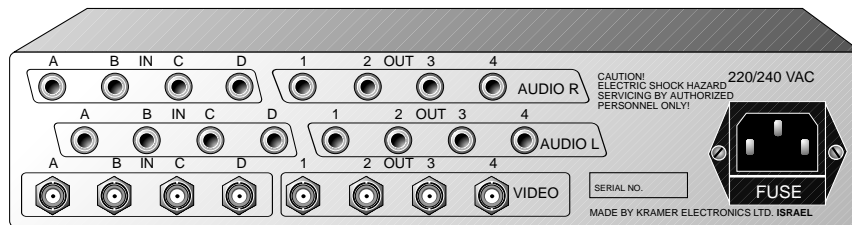


The KRAMER **VS-6EII** is a full bandwidth, state-of-the art *4x4 Video/Audio Stereo Matrix Switcher* designed for studio and other demanding applications. The **VS-6EII** may be used as one 1:4 or two 2:2 Video-Audio DAs or any other combination.

The machine operates in audio-follow-video mode and can be used in many studio applications.

Some features and applications:

- ❖ Video production studios, delivering undiminished quality video and audio outputs.
- ❖ Video showrooms, shops and points of sale for system demonstration and comparison.
- ❖ CCTV and other monitoring applications.

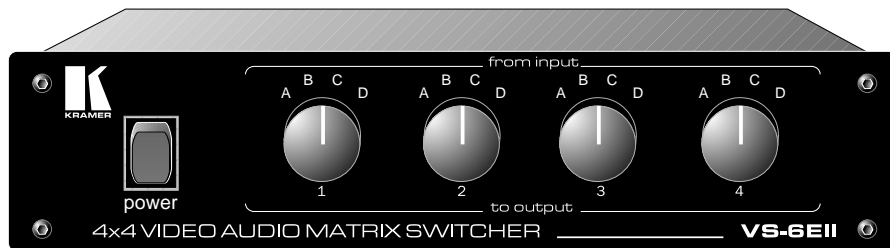

Technical Specifications:

| | |
|---------------------------|--|
| INPUTS: | 4 Video, 1Vpp/75 Ω Composite on BNCs. 4 Audio Stereo 1Vpp/ 100kΩ on RCAs. |
| OUTPUTS: | 4 Video 1 Vpp/75 Ω on BNCs. 4 Audio Stereo 1Vpp/100Ω on RCAs. |
| VIDEO BANDWIDTH: | Exceeding 100 MHz. |
| AUDIO BANDWIDTH: | Exceeding 24 kHz. |
| DIFF. GAIN: | 1.3%. |
| DIFF. PHASE: | 0.9 Deg. |
| MAX. VIDEO OUTPUT: | 2Vpp/75 Ω. |
| VIDEO S/N RATIO: | 74 dB. |
| AUDIO S/N RATIO: | 80 dB. |
| AUDIO THD: | 0.02%. |
| VIDEO CROSSTALK: | -65dB (SYNC), -48dB (C). |
| DIMENSIONS: | 24.5cm X 16cm X 5cm (W, D, H). |
| POWER SOURCE: | 230 VAC, 50/60 Hz, (115VAC, U.S.A.) |