

SD-7388


8x8 Serial Digital (SDI) Video Matrix Switcher



The **SD-7388** is a high performance matrix switcher for SDI (SMPTE 259M) video signals. Switching during the vertical interval ensures glitch-free switching with genlocked sources.

FEATURES

- **Reclocking & Equalization** - Automatic.
- **Multi-Standard** - 143Mb/s (4fsc NTSC), 177Mb/s (4fsc PAL, 270Mb/s (4:2:2 component), 360Mb/s (4:2:2 widescreen).
- **Control** - Front panel, RS-232 (K-Router™ Windows®-based software is included), & RS-485.
- **Resolution** - 8 & 10-bits (automatic).
- **Vertical Interval Switching.**
- **Switching Synchronization** - Synchronize either to external reference or the incoming video.
- **Looping Analog Sync Input.**
- **Selectable Sync Signal Termination.**
- **Worldwide Power Supply** - 85-264V AC.
- **Standard 19" Rack Mount Size** - 2U.

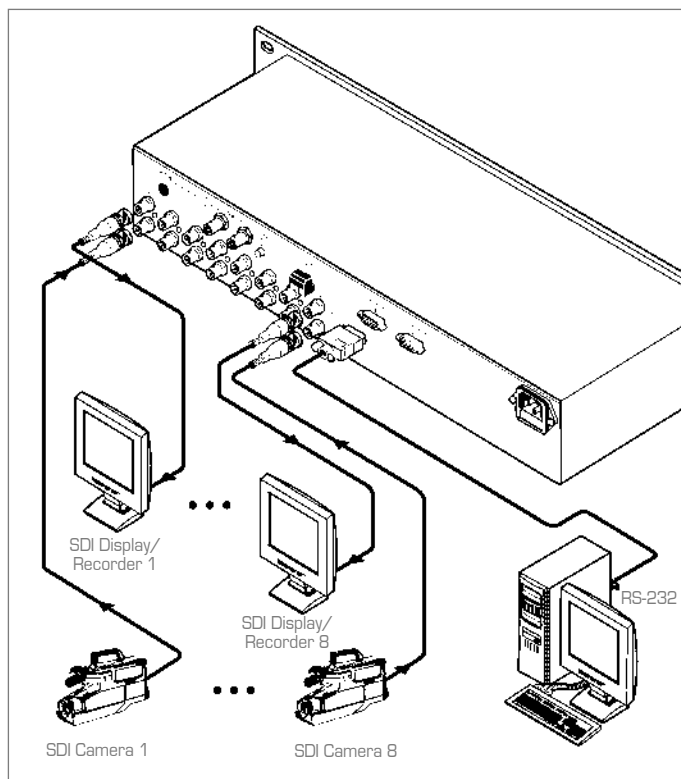

TECHNICAL SPECIFICATIONS

- | | |
|----------------------|---|
| INPUTS: | 8 x SMPTE - 259M serial video, 75Ω on BNC connectors, digital and looping analog sync inputs on BNC connectors. |
| OUTPUTS: | 8 reclocked SMPTE-259M outputs, 75Ω on BNC connectors. |
| RESOLUTION: | 10-bit or 8-bit, automatic according to input resolution. |
| SWITCHING: | During vertical interval from analog or digital sync. |
| CONTROLS: | 18 front panel touch switches, RS-232 and RS-485 interface. |
| STANDARDS: | 4fsc PAL, 4fsc NTSC, 4:2:2 (525/625), and 360Mb/s widescreen (525/625). |
| EQUALIZATION: | Automatic for up to 300m for 270Mb/s using Belden 8281 cable. |
| POWER: | Universal, 85-264VAC, 47-440Hz, 25VA max. |
| DIMENSIONS: | 19-inch (W) x 7-inch (D) x 2U (H), rack mountable. |
| WEIGHT: | 3.5kg. (7.8lbs.) approx. |
| ACCESSORIES: | Power cord, Windows®-based control software. |

