


TP-104

Computer Graphics Video over Twisted Pair Transmitter

NEW




TWISTED-PAIR INTERFACES



FEATURES

- **Bandwidth** - 350MHz (-3dB).
- **HDTV Compatible.**
- **Twisted Pair Input/Output** - RJ-45 Connectors.
- **System Range** - Up to 100 meters (320').
- **Cable** - UTP (unshielded twisted pair) such as CAT 5.
- **Compact Size** - Part of the Kramer TOOLS™ family of compact, high quality and cost effective solutions.

The **TP-104** is a twisted pair transmitter for computer graphics signals. It converts a computer graphics video signal into 4 twisted pair signals.

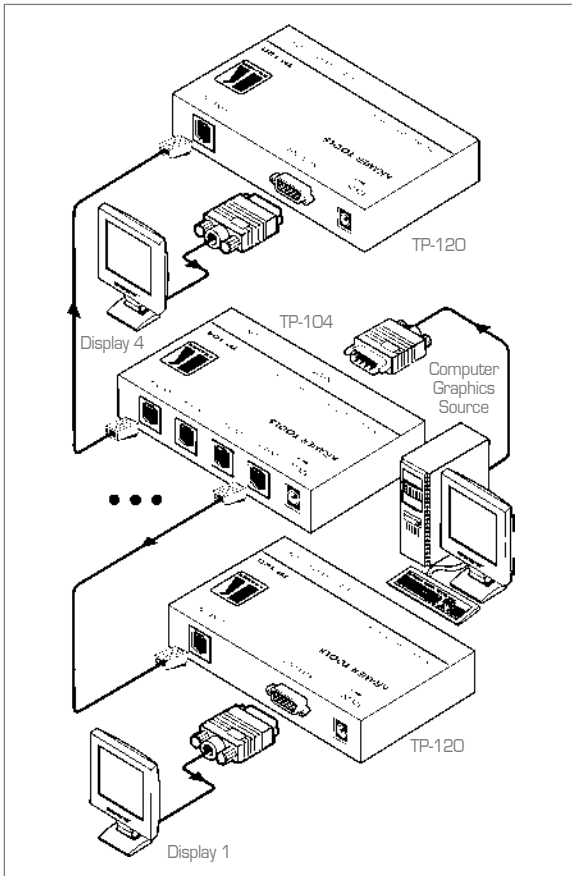

TECHNICAL SPECIFICATIONS

INPUTS:	1 VGA/UXGA on an HD15 connector.
OUTPUTS:	4 RJ-45 OUT connectors.
BANDWIDTH (-3dB):	350MHz.
DIFF. GAIN:	0.15%.
DIFF. PHASE:	0.5Deg.
K-FACTOR:	< 0.05%.
S/N RATIO:	80dB.
POWER SOURCE:	12 VDC 60mA.
DIMENSIONS:	12cm x 7.5cm x 2.5cm (4.7" x 2.95" x 0.98", W, D, H).
WEIGHT:	0.3 kg. (0.67 lbs.) approx.
ACCESSORIES:	Power supply.

