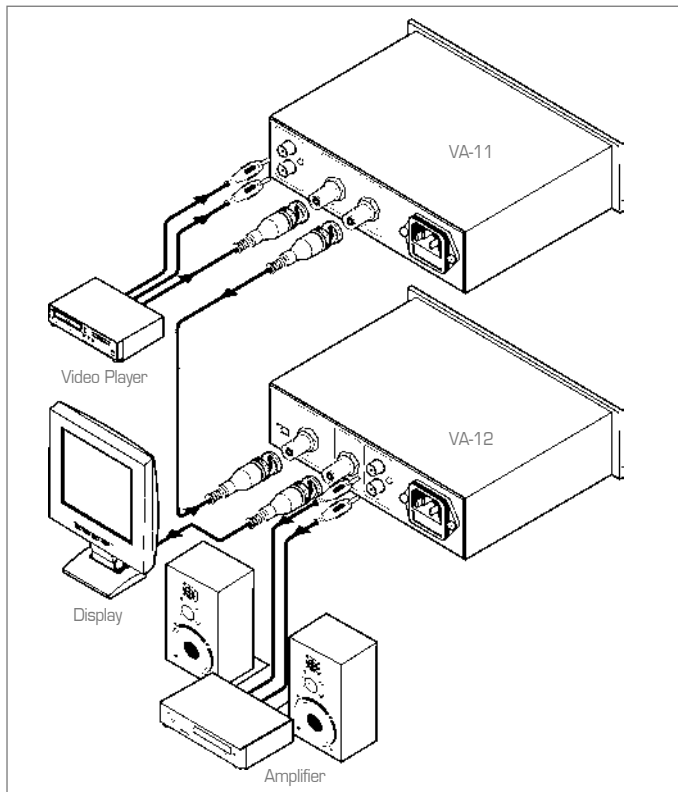


**VA-12****Composite Video & Unbalanced Stereo Audio Separator**

The **VA-12** is a high performance separator of a combined composite video and unbalanced stereo audio signal. It separates the signal that was combined by the VA-11 back into separate composite video and stereo audio signals.

**FEATURES**

- **Bandwidth** - 7MHz (-3dB).
- **Inputs** - 1 single signal of the combined audio and composite video.
- **Outputs** - 1 composite video and 1 unbalanced stereo audio.
- **Desktop Size** - Compact size. Two units can be rack mounted side-by-side in a 1U rack space with the optional RK-50RN.

**TECHNICAL SPECIFICATIONS**

INPUT:	1 mixed video-audio signal 1Vpp/75Ω on a BNC type connector.
OUTPUTS:	1 composite video, 1Vpp/75Ω on a BNC type connector. 1 audio stereo 1Vpp/100Ω on RCA connectors.
BANDWIDTH (-3dB):	7MHz.
DIFF. GAIN:	0.4%.
DIFF. PHASE:	0.17 Deg.
VIDEO S/N RATIO:	72dB.
POWER SOURCE:	230VAC, 50/60Hz (115VAC, U.S.A.) 4.4VA.
DIMENSIONS:	16.5cm x 12cm x 4.5cm (6.5" x 4.7" x 1.8", W, D, H).
WEIGHT:	0.78kg. (1.7lbs.) approx.
ACCESSORIES:	Power cord.
OPTIONS:	RK-50RN rack adapter holds two units in two vertical rack spaces.

