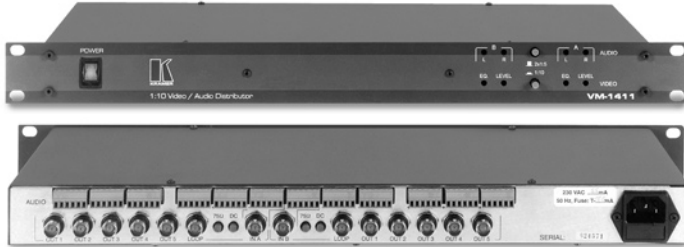

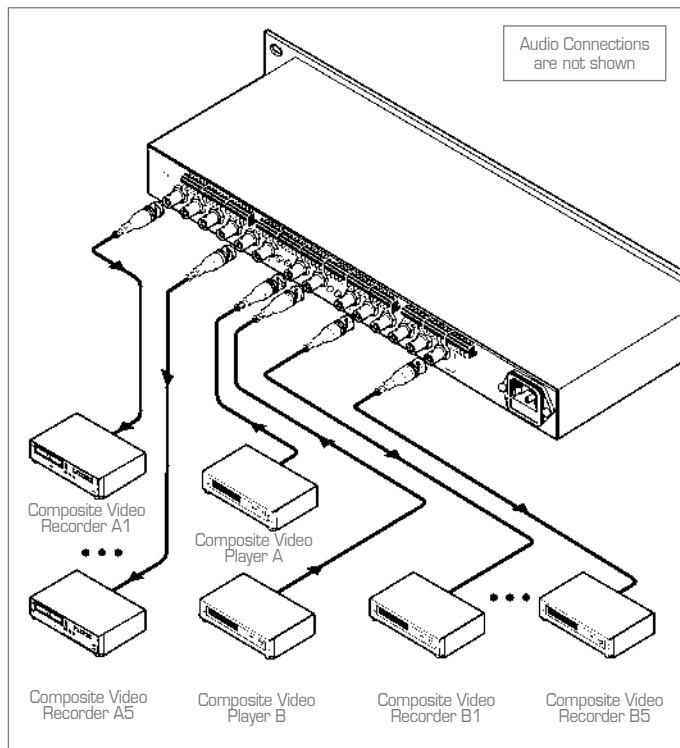


VM-1411**1:10 Composite Video & Balanced Stereo Audio Distribution Amplifier**

The Kramer **VM-1411** is a dual mode distribution amplifier for composite video and balanced stereo audio signals. It can be configured as a 1:5 distribution amplifier for s-Video (Y/C) signals with balanced stereo audio.

FEATURES

- **Bandwidth** - 224MHz (-3dB).
- **Dual Mode** - Configure as a 1:10 (Composite) or 1:5 (S-Video) DA.
- **Grouped Audio Level Controls.**
- **Level (Gain) and EQ (Peaking) Controls.**
- **Looping Inputs.**
- **Selectable Input Signal Termination.**
- **Video AC/DC Coupling Selection.**
- **Standard 19" Rack Mount Size - 1U.**

**TECHNICAL SPECIFICATIONS**

INPUTS:	2 composite/single component video, looping, 1Vpp/75 Ω on BNCs with termination switch. 2 balanced audio stereo up to +24dBm/50k Ω , on detachable terminal blocks.
OUTPUTS:	2 x 5 composite/single component video, 1Vpp/75 Ω on BNCs. 2 x 5 balanced audio stereo up to +24dBm 50 Ω , on detachable terminal blocks.
MAX. VIDEO OUTPUT:	1.8Vpp.
VIDEO BANDWIDTH (-3dB):	224MHz.
AUDIO BANDWIDTH (-3dB):	60kHz.
DIFF. GAIN:	0.2%.
DIFF. PHASE:	0.2 Deg.
K-FACTOR:	< 0.05%.
VIDEO S/N RATIO:	77dB.
AUDIO S/N RATIO:	Better than 87dB @ 1Vpp.
CONTROL:	Front accessible trimmers for video gain and EQ. and for audio L and R levels.
COUPLING:	DC or AC (video); AC (audio).
AUDIO THD:	0.02%.
POWER SOURCE:	230VAC 50/60Hz (115V U.S.A.) 19.5VA.
DIMENSIONS:	19 inch (W), 7 inch (D), 1U (H) rack mountable.
WEIGHT:	2.9kg. (6.4lbs.) approx.
ACCESSORIES:	Power cord.