

## VM-20FW


### 1:20 FireWire® Distribution Amplifier/Hub



The **VM-20FW** is a distribution amplifier/hub for FireWire (IEEE-1394) signals. It equalizes and reclocks one of two FireWire inputs and distributes it to 20 identical outputs.

#### FEATURES

- **Standards** - 1394a 1995.
- **Transfer Rate** - 100/200/400Mbps.
- **World Wide Power Supply** -110-230V AC.
- **Standard 19" Rack Mount Size** - 1U.

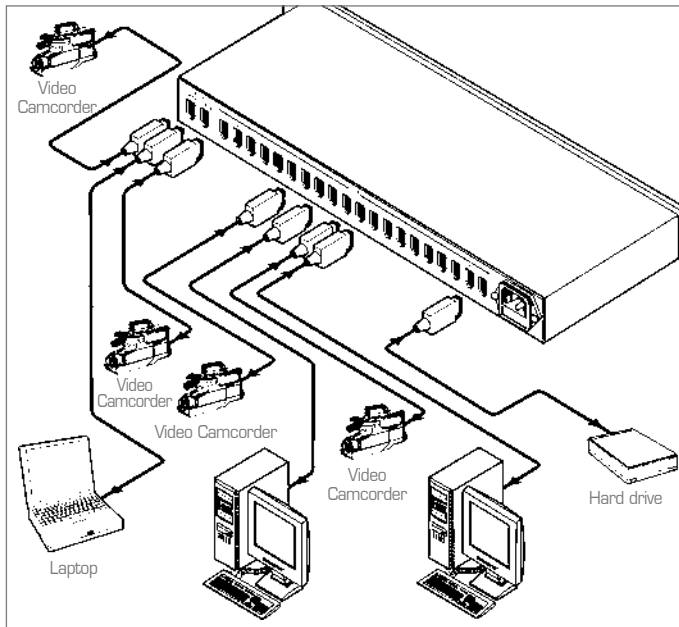

#### TECHNICAL SPECIFICATIONS

STANDARDS:	Compliant with IEEE 1394a-1995.
PORTS:	20 IEEE-1394a serial ports + 2 selectable IEEE-1394a ports for source.
BUS TRANSFER RATE:	100/200/400Mbps.
DEVICE INTERFACE:	400Mbps, 20 + 2 ports, 3.3V (PHY).
CONTROL:	Reset; Channel A/B selection.
CABLE:	IEEE-1394a 6 pin.
LEDs:	Power LED; 20 LEDS for Link Ready (cable inserted OK).
COMPATIBLE:	PC/MAC.
POWER SOURCE:	110-230VAC, 25VA.
DIMENSIONS:	19-inch (W), 7-inch (D) 1U (H) rack- mountable.
WEIGHT:	2.8kg. (6.2lbs.) approx.