

VM-3A


1:3 Balanced Stereo Audio Distribution Amplifier



The Kramer **VM-3A** is a high performance distribution amplifier for balanced stereo audio signals. It takes one stereo input and distributes the signal to three identical stereo outputs.

FEATURES

- **Level (Gain) Controls.**
- **S/N Ratio** - 87.6dB.
- **Desktop Size** - Compact size. Three units can be rack mounted side-by-side in a 2U rack space with the optional RK-SM adapter.

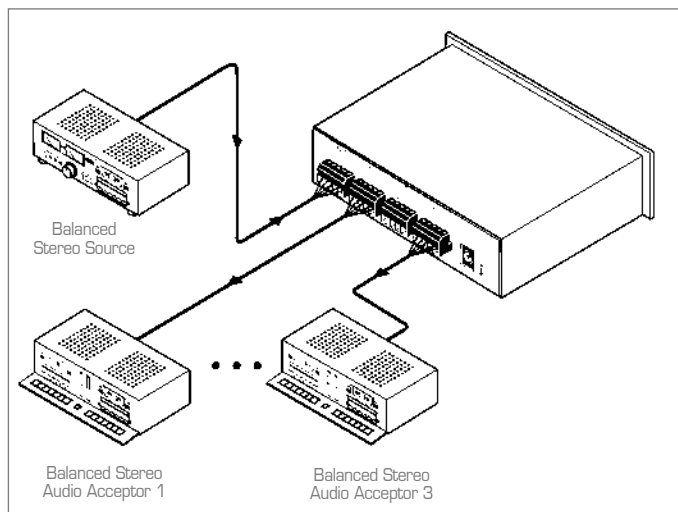

TECHNICAL SPECIFICATIONS

INPUT:	1 balanced audio stereo + 4dBm/100k on a detachable terminal block.
OUTPUTS:	3 balanced audio stereo + 4dBm/150Ω on detachable terminal blocks.
MAX. OUTPUT LEVEL:	10.5Vpp.
BANDWIDTH (- 3dB):	100kHz.
2nd HARMONIC:	0.002%.
S/N RATIO:	87.6dB.
THD + NOISE:	0.018%.
CONTROL:	Output level control: - 0.4 to +7.8dB.
COUPLING:	DC.
AUDIO THD + NOISE:	0.018%.
POWER SOURCE:	12VDC 40mA.
DIMENSIONS:	11.7cm x 6cm x 3.2cm (4.6" x 2.4" x 1.3") W, D, H.
WEIGHT:	0.28kg. (0.62lbs.) approx.
ACCESSORIES:	Power supply.
OPTIONS:	RK-SM rack adapter.