


## VM-3Sxl

### 1:3 s-Video Distribution Amplifier



The Kramer **VM-3Sxl** is a high performance distribution amplifier for s-Video (Y/C) signals. It takes one input, provides correct buffering and isolation, and distributes the signal to three identical outputs.

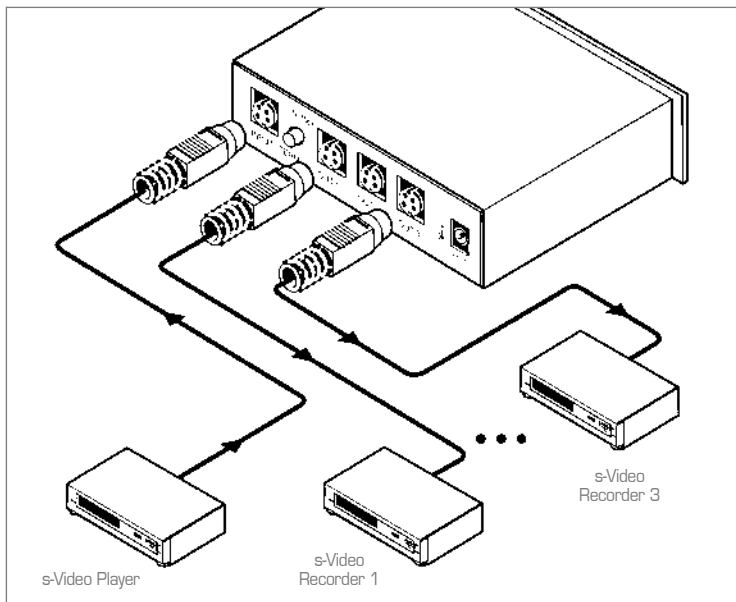

#### FEATURES

- **Bandwidth (Y)** - 200MHz (-3dB).
- **Selectable Input Signal Termination.**
- **Desktop Size** - Compact size. Three units can be rack mounted side-by-side in a 2U rack space with the optional RK-SM adapter.

#### TECHNICAL SPECIFICATIONS

INPUT:	1 s-Video, 1Vpp/75Ω (Y), 0.3Vpp/75Ω (C) on a 4p connector.
OUTPUTS:	3 s-Video, 1Vpp/75Ω (Y), 0.3Vpp/75Ω (C) on 4p connectors.
MAX. VIDEO OUTPUT:	2Vpp.
VIDEO BANDWIDTH (-3dB):	200MHz (Y).
DIFF. GAIN:	0.03%.
DIFF. PHASE:	0.03 Deg.
K-FACTOR:	< 0.05%.
S/N RATIO:	80dB.
CONTROL:	Termination switch.
OUTPUT COUPLING:	AC.
POWER SOURCE:	12VDC, 70mA.
DIMENSIONS (W, D, H):	11.7cm x 6cm x 3.2cm (4.6" x 2.4" x 1.3").
WEIGHT:	0.24kg. (0.53lbs.) approx.
ACCESSORIES:	Model VA-50P power supply with six 12VDC outlets
OPTIONS:	RK-SM rack adapter.

