VM-5YCxI

1:5 Composite Video and s-Video with Stereo Audio Distribution Amplifier










The VM-5YCxI is a unique dual format 1:5 distribution amplifier for composite video and s-Video (Y/C) signals with unbalanced stereo audio. The VM-5YCxI is a truly flexible DA that can handle both composite and s-Video (Y/C) signals and includes built-in high quality signal format conversion.

FEATURES

- High Bandwidth 300MHz (- 3dB).
- Dual Format The equivalent of two DAs in one box. The unit has a 1:5 composite video with stereo audio section and a 1:5 s-Video (Y/C) with stereo audio section.
- Built-in Bi-Directional Format Conversion - Can be a mixed output format 1:10 DA (5 composite video and simultaneously 5 s-Video (Y/C)) with stereo audio for either the composite video input or the s-Video (Y/C) input.
- **Extra Converted Output Connectors** For each signal type, composite video and s-Video (Y/C), there is a dedicated format converted output.
- Looping Inputs.
- Input Signal Termination.
- Video AC/DC Coupling Selection.
- Standard 19" Rack Mount Size 1U.

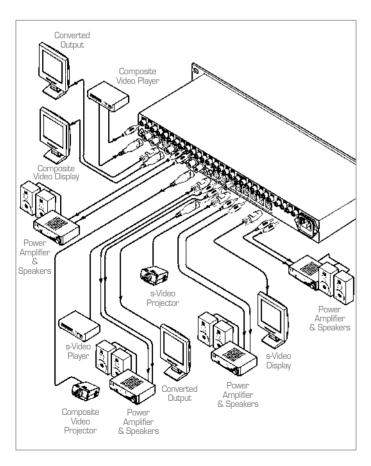

TECHNICAL SPECIFICATIONS

1 composite video looping, $1\text{Vpp}/75\Omega$ on a BNC INPLITS:

connectors. 1 looping $Y = 1Vpp/75\Omega;$ $C = 0.3 \text{Vpp}/75\Omega$ on a 4p connector. 2 audio stereo looping $1 \text{Vpp}/50 \text{k}\Omega$ on RCA

connectors.

OUTPUTS: 5 + 1 composite video,

 $1Vpp/75\Omega$ on BNC connectors. $5 + 1 \text{ YC}, \text{ Y} = 1 \text{Vpp}/75\Omega,$ $C = 0.3 \text{Vpp}/75\Omega$ on 4p connectors. 2 x 5 audio stereo, $1Vpp/100\Omega$ on RCA

connectors.

VIDEO BANDWIDTH (- 3dB): 300MHz (composite to

composite or YC to YC).

AUDIO BANDWIDTH (- 3dB): 100kHz. DIFF GAIN! 0.26% O.11 Deg. DIFF PHASE: K-FACTOR: 0.1%. VIDEO S/N: 73.5dB.

AUDIO S/N: 87.4dB. unweighted (1Vpp).

- 58dB @ 5MHz. VIDEO CROSSTALK:

NON LINEARITY: 0.05%

CONTROL: YC to YC or composite,

composite to composite or YC programme switches.

COUPLING: DC or AC (video); AC (audio). 0.021%, 1kHz. 0.003%, 1kHz. AUDIO THD:

2nd HARMONIC: 230VAC 50/60Hz POWER SOLIBOR: (115VAC U.S.A.),12VA. 19 inch (W), 7 inch (D), 1U (H) DIMENSIONS:

rack mountable

WEIGHT: 2.5kg. (5.6lbs.) approx.

ACCESSORIES: Power cord.

